

A WEEKLY JOURNAL OF PRACTICAL INFORMATION, ART, SCIENCE, MECHANICS, CHEMISTRY AND MANUFACTURES.

Vol. XIII ... No. 7.

NEW YORK, AUGUST 12, 1865.

IN ADVANCE.

Improved Radial Drill Press.

There is no more indispensable machine in metalworking establishments than a good drill press; and a great deal of ingenuity can be shown in planning them so as to obtain the greatest possible efficiency for the least weight of metal and cost. The kind of

work that has to be done under a drill press varies greatly even in shops where one article is manufactured; as, for instance, turbine wheels. One branch demanding long drills to reach past shoulders on the job, which prevent the spindle from being run down, and another requiring the table to be turned out of the way entirely so that the work may set on the floor, or still other jobs running from small holes to large ones. For these reasons it is desirable to have the machine well arranged to accommodate all classes, and we believe the necessary ends are combined in this one.

In detail it comprises a base, A-to be set in the floor, on a foundation of brick work-an upright column, B, and a radiating arm, C, fitted to a neck at the top of the column, and traversing freely in all directions. In this slides the head carrying the drill spindle, which is moved backward and upward by a rack (not shown in the engraving), with pinion and hand wheels, D, one of which is on each side of the machine. The power is derived from a countershaft overhead, a belt from which drives the horizontal shaft. E. passing through a bearing in the side of the column. From this the motion is communicated by two pairs of miter wheels and an upright shaft in the center of the column, to the shaft, F, passing through a sleeve or barrel running in bearings on top of the arm, and provided with a feather, to allow it to slide freely with the motion of the head. The drill spindle is driven by a pair of bevel wheels in the usual manner, and the head in which it runs, with the frame-work carrying the feed wheels and screw, slides within the arm, which is open from end to end and planed up on the bearing surfaces.

It will be seen that the arm or swing is allowed to traverse freely in all directions -the only interference being from the driving belt-and that there is secured besides a longitudinal motion of the drill within the arm. A large number of holes may thus be drilled in succession in the same surface, without moving the work; an advantage which will commend itself to machinists. It is especially useful in fitting up such work as steam cylinders, heads, and steam chests, which, by its means, can be drilled at one sitting instead of many, and has been approved and adopted, particularly in railroad and locomotive shops. The machine is pro-

vided with a horizontal table with screw and nut, for small work.

Manufactured by Robt. H. Barr & Co., machinists, Wilmington, Del., to whom all communications should be addressed.

THE steamship Glasgow, of the Inman line, was recently burned at sea. No lives were lost.

THE STORY OF THE MAN WHO FLEW.

The Chicago Tribune contains a letter from one Walter V. Collins, written at Minneapolis, Minnesota, giving an account of a modern Icarus, who flew by means of bladders, copper cylinders, parachutes, and myself, Patrick Riley and Andrew Ward, the drivers; six in all. Mr. Smith was en-

BARR & CO.'S RADIAL DRILL PRESS.

kites with rope ladder tails. We print the portion of this letter which describes Mr. Smith, the flying man, and his apparatus, merely remarking with all deference to the names of the respectable citizens appended as witnesses to the feat, that the parrative has a very aerial sound.

"This morning at 11 o'clock, the hour appointed,

him ready to start. At the door there stood two teams and wagons, one of which contained what I supposed to be a canvas tent, with poles, etc. In the other we took our seats. The party consisted of Mr.

> veloped in a large linen duster, which quite concealed bis person. During the ride he appeared rather serious and taciturn. In two hours we reached a point about twelve miles west of the city, and there stopped. The country was a rolling prairle, wholly uncultivated, and with no traveled road for several miles on either side. The canvas, etc., was taken out and spread upon the ground, and I found to my amazement that instead of a tent it was an immense kite, made of sail cloth, with a strong jointed frame. It was of the kind known as the 'house kite,' hexagon form, and when put together was twenty-five feet in length, thus containing an area of over square feet. Its cord was about the thickness of my little finger, but of great strength, having been manufac-tured to order. The tail of the kite was merely a light rope ladder. Mr. Smith now threw off his linen custer, and I could scarcely avoid laughing at his extraordinary appearance. Beneath his arm pits, and extending around his body, there was a copper cylinder, a foot wide from top to bottom, and about two feet in diameter. His ordinary clothing had been replaced by a tight-fitting suit of ribbed cloth, made apparently all in one piece. Attached to his arms and body were a pair of webbed wings of strong material with a light tramework of steel. When at rest, these wings (if I may so call them) hung loosely about him like a closed umbrella, but when his arms were raised they became extended and gave him an odd resemblance to the 'Green Monster' in the pantomime. Scores of ordinary bladders were fastened to the suit above-menmentioned, and equally in every part. Some were placed close to the body, and others depended at various lengths, from one to three feet. From the mouth of each a hollow, flexible tube communicated with the cylinder. if extended, would consequently form a net-work of air tubes. I made these observations hastily, for Mr. Smith at once placed himself upon the rope ladder and requested that the kite, which had been set up on a slight elevation, should be raised. The Captain and myself called out together

that he had forgotten his parachute; but he replied impatiently that he did not need it. We declared, however, that we would not permit so foolhardy an experiment unless this precaution were taken, and after a little parley he consented. A steady breeze was now blowing from the southeast. Riley and Ward took their place in the wagon beside we were promptly at Mr. Smith's store, and found the coil of rope; McLennan acted as driver white

Capt. Cobb and I remained on the ground as spectators. The horses were started into a gallop, and the kite rose, slowly and heavily, but steadily upwards. I glanced at my watch; it was twenty minutes past two o'clock. The kite continued to rise, with a slight swaying motion, higher and higher. It seemed as though the daring aeronaut must become sick and dizzy at his lofty hight. Suddenly I was startled by an exclamation from my companion, and noticed a dark object falling from the kite and fluttering slowly downwards. It was the parachute which Smith had thrown away! The persons in the wagon, which was now half a mile distant, did not seem to notice this occurrence. Obviously Smith's situation, if his invention should fail, had become one of appalling danger; since it is almost impossible to bring a kite to the ground without a violent and jerking lateral motion. It seemed equally perilous to stop or to proceed. Trembling with anxiety, we watched with straining eyes his fast-receding form. I had an excellent field glass, which gave me a perfect view of his every motion. And now we noted that both the bladders and the wings had begun to expand. Higher he rose, but we could detect in his attitude no sign of doubt or trepidation. The bladders soon became distended so as to almost hide the man from view. He had now reached an elevation, as near as I could judge, of 1,200 to 1,500 feet, or about a quarter of a mile. He now detached his arms from the ladder, his feet remaining upon it, and waved the wings upward and downward, as if to try them. For an instant he stood thus, and then, relinquishing all support, he sprang off into the empty air! For a moment my heart stood still. I held my breath, expecting to see him dashed to the earth. But he did not fall; he did not even seem to tend downwards. His wings played with great swittness, and he floated in a horizontal position, with apparent ease. Again, I glanced at my watch. The hand pointed to twentyseven minutes before three. The kite, deprived of its ballast, had sunk to the ground. Watching narrowly, it was evident that Mr. Smith was slowly moving forward. It appeared to me that the bladder slightly contracted and expanded alternately, as one's chest does in breathing. Of this I could not feel absolutely certain, since the appearance may have resulted from their fluttering motion; yet, the Captain's opinion coincided with my own. After a few minutes (which seemed like hours), we perceived that Mr. Smith had begun to descend. Very gradually this was accom-plished, and exactly at a quarter before three he touched the ground. We ran toward him, and found that he was considerably exhausted. He responded cheerily, however, to our hearty congratulations. As the wagon had already returned, it did not take long to stow away the kite, etc., and we then returned to the city.

"I have thus given a plain and exact account of this most extraordinary occurrence. I will not offer any speculation, concerning the nature of Mr. Smith's invention, and in fact do not consider myself at liberty to do so. But, I am greatly mistaken if the name of David K. Smith is not soon familiar to the public as one of its greatest benefactors. Any one can satisfy himself as to his character and standing in this community, by inquiring of Hon. C.E. Vanderburgh, Judge of the District Court, or of almost any citizen of Minneapolis. Any person wishing to inquire further is at liberty to call upon me at my office, No. 26 Larmon Block; or a letter will reach me through the Chicago P. O., Box 6,026.

"WALTER V. COLLINS."

THE WATER POWER OF MINNESOTA.

The St. Paul Weekly Press has a long article upon the flourishing condition of manufactures in Minnesota, and gives some interesting statistics of the value of some branches of trade there carried on. We copy :-

THE WATER POWER.

In order to turn this vast power to practical use the St. Anthony Water Power Company was organized in 1855. This company is now composed principally of Eastern capitalists. In 1856, the Minneapolis Mill Company was organized. In 1857 and 1858 the company proceeded to build a dam twenty seet high, running from the shore out into the river four hundred feet, thence up the river twelve hundred California trees will meet their doom in short order. milts at he present time, range from two to four

feet. Five hundred feet of the twelve hundred is a dry dam, the same hight as the portion running out from shore, and the remainder is lower, allowing the water to pour over it. Besides this dam the company built a canal at the shore end, one hundred and fifty feet long, which largely increases the opportunity for erecting manufacturing establishments. Mills situated on the dam pay for the use of the water alone, while the owners of those on the canal buy the ground and lease the water power. One of the saw mills pays \$1,200; four pay \$900, and one \$600 per annum for the use of water. Next season the company intend to extend the canal five hundred feet bevond its present limit.

THE LUMBER TRADE.

The most important branch of trade is in lumber, a business in which an immense capital is already employed, and which, owing to the great demand for the article, is being rapidly increased.

WHERE THE LOGS COME FROM.

Ninety miles above the falls, on Rum river, and one hundred and fifty above on the Upper Mississippi, are the pineries, which afford an almost inexhaustable supply of logs. Here, in the winter, large gangs of men ply the ax vigorously, and by spring millions of feet are ready for the drives.

DRIVING.

As soon as the river opens in the spring, if the stage of water permits, the work of driving the logs down commences—a work which is far from agreeable and oftentimes dangerous. Few have any adequate conception of the expense and perplexity incident to the drives. For two months this season the log owners were compelled to pay men four dollars per day and board them, and the expense of bringing the logs to the mills has been at least two dollars for every thousand feet of lumber obtained.

All the logs on the Upper Mississippi, some ten million feet, have been brought down, but in the drives on Rum river there are still twenty-five million

THE MINNEAPOLIS SAW-MILLS.

Having noted the progress of the logs from the forest to the boom above the city, we next turn our attention to the mills. Situated on the dam heretofore mentioned, extending from the shore into the river, stands a block of six saw-mills, 360 feet long by seventy feet wide, with three Ls, 32x40, the whole under a single roof. A visit to these mills will prove of interest to any one, as the scale on which business is done is unusually large.

SORTING THE LOGS.

All of the mill owners or lessees have peculiar marks, which are cut upon each log with an ax in the pineries. They then come down promiscuously to the St. Anthony boom, fully a mile above the mills. where they are sorted—those belonging to the Minneapolis mills being driven into the Minneapolis boom, and floated down to the mills. Directly in the rear of the building each mill owner has a pond, defined by floating timbers lashed together, and when the logs reach these ponds from the boom above they are again sorted and driven into the pond of their respective owners, from whence they are drawn up the slip by machinery into the mill.

A BUSY SCENE.

Entering the mills, the visitor cannot fail to be struck with the life and activity visible. As they are only separated by frame-work, a person can look through the whole length and see a great collection of men and machinery, all moving with the utmost regularity. It is, emphatically, the hive of industry, and the indolent man would blush to find himself a spectator of such a scene.

THE SAWS AND THEIR USES.

The greater portion of the work is done by gangs of saws, which, with a single run, will convert any but the largest logs into boards. A gang consists of from twenty to twenty-two saws, according to the size needed for the logs; and of the gangs there are two kinds, the live and the pony gang. The live gang is used principally for flooring, fencing and inch boards, and is rarely adjusted to make lumber of a different thickness.

The largest logs are taken to the double circular saw, one saw being located just above the other, in order to complete the work if the log is too large for These saws are used in making timber, dimension stuff, etc., and also in preparing the log for the pony gang, either by slabbing it or cutting it into bolts. The pony gang differs from the live gang in that it is used to saw lumber of nearly every kind and thickness, the number of saws being frequently increased or decreased according to the thickness desired.

dollar

includ

exper

made

betwe

son. (

state

at the

to a the N

nothi

Time

facts

Ser

Algo New

before source rant Mr tron Departure to I chin Bure

The

ure wel

len

tha wa ma

dle ble

the

In connection with the gangs are three other saws (circular), one edger and two trimmers. As soon as the gang has passed through a log, the boards go to the edging table, where the edges are smoothed and they are made of the same width, from whence they pass to the trimming table, where each end is sawed off at the same time, making them exactly the same length.

POWER AND CAPACITY.

It requires 40-horse power to run a gang of saws and 10-horse power to drive the edger and trimmers which go with it. The length of time required to run the gang through a log varies of course with the size; but eight minutes is ample time to transform a twofoot log into boards, and in fifteen minutes after a log comes up the slip in the rear of the mill it passes out to the sluice in tront, finished lumber, and glides away to the raft. In ten hours a gang of saws can turn out about twenty thousand feet, and the double circulars from ten to twelve thousand.

NUMBER OF SAWS, ETC.

Number of gaugs (22 saws in each), 9; number double circular saws, 6; number shingle machines, 6; number lath do., 6. Cost of six mills, \$143,000; capacity six mills (24 hours), 430,000 feet; men em-

If these mills are run night and day, they can manufacture nearly half a million feet of lumber every twenty-four hours. Some of the mills are already running both night and day, all of them probably will

WHERE THE LUMBER GOES TO.

Three rafts have been sent from Minneapolis and two from St. Anthony this season; and five more are nearly ready. Some of these rafts go as far as Mem-Three million feet have been sent to St. Louis, and taken thence by steamer to New Orleans. In Minneapolis, all the dealers have large yards in which there are immense stacks of lumber.

THE PRODUCT OF THE SEASON.

Though compelled to commence late in the season, the Minneapolis mills have sawed twelve million feet, and the St. Anthony mills six millions. It is estimated that on the Minneapolis side, thirty-eight millions, and on the St. Anthony side, nineteen millions more will be sawed before the close of the season. This will make the entire product of this season, seventy-five million feet.

PRICE OF LUMBER.

The following is the present price list of lumber at

Common lumber and fencing per M.	\$16	00
1st Siding	22	00
2d Siding	20	00
No. 1 Shingles	2	50
X Shingles	4	00
XX Shingles	5	00
Flooring, dressed	30	00
Flooring, rough	28	00
Dimension Stuff	to 20	00
No. 1 clear30	to 35	00
No. 2 clear20	to 25	
No. 1 Pickets	20	50
No. 2 Pickets	15	00
Laths.	2	75

This shows a large reduction, as for the past two years common lumber has been \$22 per thousand, and superior lumber correspondingly high.

WHAT KEEPS UP THE PRICE.

Those who anticipate any material reduction in the price of lumber this season will undoubtedly be disappointed. The great demand, a wide market and high price of labor, all tend to render it impossible to supply it at a lower figure. Having been without logs for two years, the home stock of lumber became so reduced that the demand in our own State is immense; and add to this the close of the war, which makes a market extending from the Falls of St. Anthony to the Gulf, and the result may be imagined. The expenses are also enormous. During the winter, the men received from \$40 to \$50 a month and board, for working in the pineries; and for driving the logs, owners are, and have been, paying four dollars per day. Where driving formerly cost fifty cents per the lower one, and in this way anything short of thousand, it now costs two dollars. Wages at the

expenses of the business can be derived.

THE NAVAL CONTROVERSY.

In the last number of the Scientific American we made brief allusion to the fact that the war of words between the Navy Department and Mr. E. N. Dickerson, of this city, had resulted in a challenge, and stated that Mr. Dickerson had not accepted the same at the time of publication. He has since consented to a trial of his engines against those designed by the Navy, but protesting that the results will prove We find the following letter in the daily nothing. Times. It appears to be semi-official, and contains a clear statement of what the Department expect to When the trial takes place, we shall give all the facts in the case.

WASHINGTON, Aug. 1, 1865.

Several letters have recently been published on the subject of the machinery of the United States steamer Algonquin, written by E. N. Dickerson, Esq., of Since he has thus brought the matter before the public, the following facts, from official surces, may be of sufficient general interest to warrant their publication:

Mr. Paul S. Forbes, a wealthy merchant, and a patron of Dickerson, sought and obtained from the Navy Department, in March, 1863, a contract to construct the engines and boilers of a double-ender, according to Dickerson's patent, to compete with similar machinery designed by Mr. Isherwood, the Chief of the Bureau of Steam Engineering in that Department. The price was to be the same, and the contract contains the following guarantees, namely:-

It is further agreed, and mutually understood, that the variations from the specifications [of Mr. Isherwood's machinery] hereunto attached, and forming part of this contract, are to be in the dimensions and arrangement of the cylinder, and such parts as are thereby affected; in the design of the valve-gear; and in the design and arrangement of the boilers; and also it has surface, condenses.

in the design and arrangement of the boners; and also in the surface condenser.

These changes are not to increase the weights of machinery, nor the space occupied by it, nor to decrease the weight of coal carried in the bunkers within the limits allowed for the engineer department, with the machinery described in the attached specifications.

And it is also agreed and mutually understood that, if, on the completion of the machinery and a careful trial thereof by such persons as may be directed by the Sceretary of the Navy, it shall be found by them that its performance, either in amount of power developed, or in the cost, pro rata, of that power in coal, is less than those of the machinery described in the attached specification, they, the said parties of the first part, will remove it, and replace it at their own cost, with the machinery described in the attached specifications.

These terms show that the contract requires simply

These terms show that the contract requires simply this: The dep rtment to ascertain by usual tests first, the maximum power the two competing systems can be made to develop; second, the cost of the power, pro rata, in coal. The usual tests are the measarement of the power developed by means of the well-known "indicator," employed the world over for this purpose, and the weighing of the coal. The division of the first into the number of pounds of the latter consumed per hour, is the solution of the problem. This, the department has ordered to be done by a board composed of persons than whom none are supposed to be more competent. The machinery of the Winooska was selected to compete against that of the Algonquin simply because the Winooska was the most convenient vessel of her class at command

The trials are to be made at the wharf with the paddle surface sufficiently reduced in diameter to enable the engines to work off all the steam that can be obtained from their bollers, and are to be continued 96 consecutive hours to give a reliable mean, which cannot be obtained from short trials. The powers developed are to be measured by the "indicator," the coal is to be taken from the same pile and carefully weighed as it is used, but before being carried on board, so that the draught of water and dip of wheels of both vessels will remain constant, and be same throughout the trials.

The test is not of the speeds of the two vessels, for they are duplicates, and are to have duplicate wheels by the express terms of the contract and specifications. The test is simply whether the boilers, condense, and valve-gear of the Algonquin are equal to, better or worse, than those of the Winooska, and the trial, as directed by the department, will not only conclusively show these facts, but how much better

dollars per day. From these figures (which do not or worse. By making them at the wharf they can include the original cost of the logs) some idea of the be continued longer, be made in a really philosophic manner with strict accuracy, and be witnessed by all who may feel interested in them, which could not be the case were they made in the river or at sea

The Navy Department has not accepted a challenge from Mr. Dickerson; it has no correspondence with him and has nothing whatever to do with him, but is simply carrying out the provisions of the contract with Mr. Forbes, to determine whether the engine shall be accepted and paid for, or whether it shall be removed from the vessel. The contract does not provide for a trial of speed at sea. The vessels being the same, the result arrived at in the proposed trial will, however, unerringly determine which is the fastest vessel. The Navy Department will not be swerved from its duty to the contractor, or led into any controversy with Mr. Dickerson by any public statement JUSTITIA. of the latter.

Train Oils.

The different oils that go under the one name of train oil, may be classified as follows:-A. That which is made from fish. This is made from the lard of the great marine animals, such as whales, seadogs, seals, etc., and sometimes even made from herrings. The quality will vary according to the peculiarity of the animal it is made from. The oil mostly in use, and known under the name of "Southern Sea Train Oil," is made from seal. The quality will also vary according to the proparation. B. Whale oil. This is of a brown color, is quite transparent, and when boiled with rarified sulphate acid, will throw out brown flakes. The liquid is not very thick and does not smell as bad as the following oils, which are obtained by fermenting the lard. C. Sea-calf's oil. This oil is of a pale brown color, much thinner than the former, is transparent, and when boiled with sulphate acid, will gradually settle to the bottom. D. Dog-fish oil. This is of a dark brown color, is much thicker than both the former, but its smell is unbearable. E. Herring's oil. The herrings are boiled in water and constantly stirred; when they are thoroughly cooked cold water is poured in; this brings up the oil to the top, it is then taken out and filtered and put into casks. Sweden is almost the only place where this oil is produced. F. Cod oil. This is made from the liver of the codfish, and is mostly manufactured in Helgoland and in Bergen. There are two kinds of it, one is white, the other brown. The white is obtained by melting the fat, not on fire, but merely by exposing it to the sun. It has the appearance of poppy oil, pale and yellow. It has a sweet taste, but when mixed with reagent, tastes somewhat acid. dissolves in spirits of wine, and is much used in med-

The second sort is extracted by boiling the liver: its color is brown, and the fluid thick, and has a very offensive smell, and a cutting, bitter taste, but is easier dissolved in spirits of wine than the former. When boiled in water it throws out flakes, and more so when mixed with sulphate acid. The flakes, when dissolved in turpentine, or spirits of wine, show that gall fat is mixed with it. Its specific weight is 92. G. Dolphino oil. This is produced by melting the fat of the dolphin in hot water of 60°. Its color is pale yellow, has the smell of sardines, but, when exposed to the light and fresh air, it loses the offensive odor, and changes the color, first becoming brown and then almost colorless. This train oil is dissolved by adding five parts of boiling spirits of wine. - Gerber Courier.

Raising the "Congress" Frigate.

An attempt to raise the wreck of the frigate Congress, sunk by the Merrimac in Hampton Roads, has been partially successful. On the portion of the wreck which was recovered are two rusty guns, covered with oysters and barnacles. The woodwork is, of course, rotten and worthless, but the great amount of metal in and about the wreck will be quite valuable. Several pieces of coin have been found on the deck, which are prized highly by the finders, and will be treasured as relics of peculiar value. Several naval buttons were picked up, and at once fastened to watch guards. Among other things, one of the spectators found a complete set of artificial teeth. No human remains have as vet been recovered.

Magnesium Light for Telegraphs.

On Tuesday last some experiments with the magnesium light were made on board the Great Easter off Shoeburyness, by Capt. F. J. Bolton, of the 12th The night was windy, but signals were regiment. transmitted to and received from the shore at Shoel buryness, a distance of about six miles. This system of telegraphing, in which an alphabet on the Morse principle is used, bids fair to become universal, the Board of Trade being about to introduce it into the commercial code of signals. It is the opinion of Capt. Bolton, that the magnesium will be cheaper than the oxy-calcium light, and equally powerful in its effects. On Tuesday night the light on shore was the oxy calcium, while on board the Great Eastern the lime light was used. The lamp in the latter case not being so constructed as to keep out the wind effectually, there was some difficulty at first in getting a steady light, a delay which Shoeburyness noticed by signalling "Look sharp, look sharp; fire An animated conversation between the ship and shore then took place, Shoeburyness finishing with "Good night, good night-our light nearly gone." The magnesium light has never been used by the Government for this purpose before Tuesday last, whereas the oxy-calcium light has been on trial for three years, so any conclusions as to the comparative merits of the two would be premature.-London Examiner, July 14.

The Speed of the Pen.

A rapid penman can write thirty words in a minute. To do this he must draw his quill through the space of one rod-sixteen and one-half feet. In forty minutes his pen travels a furlong; and in five and one-third hours one mile.

We make, on an average, sixteen curves or turns of the pen in writing each word. Writing thirty words in a minute, we must make four hundred and eighty-eight to each second; in an hour, twentyeight thousand eight hundred; in a day of only five hours, one hundred and forty-four thousand; in a year of three hundred days, forty-three million two hundred thousand.

The man who made one million strokes with a pen in a month was not at all remarkable. Many men make four millions.

Here we have in the aggregate a mark three hundred miles long, to be traced on paper by each writer in a year.

In making each letter of the ordinary alphabet, we must make from three to seven strokes of the penon an average of three and a half to four .- Com. College Monthly.

MARKET FOR THE MONTH.

Price June 28. Coal (Anth.) \$\mathbb{2}2,000 \text{ fb} \dots \mathbb{8} 50 \text{ \$\text{@10 00}}	Price Aug 2 \$8 50
Coffee (Java) 78 B24 @ 25	25 @ 28
Copper (Am. Ingot) % 1b29 @ 30	30 @ 31
Cotton (middling) # B 50	48
Flour (State) % bbl \$5 20 @ 6 15	\$6 00 @ 7 00
Traces to commercial	
	1 00
Hemp (Am.drs'd) # tun. 260 00@270 00	255 00@265 00
Hides (city slaughter) % b. 71@ 9	9 @ 10
India-rubber # 1b	48 @ 70
Lead (Am.) # 100 lb 9 75 @10 00	9 00 @9 624
Nails # 100 fb 5 00 @ 5 25	6 50
Petroleum (crude) #gal 354	324@ 33
Beef (mess) # bbl \$10 00 @16 00	10 00 @14 50
Saltpeter & B 24	24
Steel (Am. cast) % b13 @ 22	13 @ 22
Sugar (brown) & 1 94@ 154	8@ 164
Wool (American Saxony fleece)	000 101
	75 @ 77
Zinc % 16	124@ 134
Gold 1 39	1 451
Interest (loans on call4 @ 5	7

OUR MERCANTILE MARINE.-It has been definitely ascertained that more than six hundred sea going vessels belonging to citizens of this country have been sold during the war to British subjects. sold to citizens of other countries w.ll probably bring up the total to a thousand vessels that were four years ago carrying the stars and stripes and are now sailing under foreign colors. The capacity of the vessels transferred is estimated at five hundred thousand tuns.

HEAVY ENGINE.—The Taunton (Mass.) Gazette says one of the largest locomotives ever manufactured in that place was sent from the Taunton Locomotive Manufacturing Co. It weighs 34 tuns, and is destined to the New Jersey Central Railroad.

Improved Brick Machine.

The appended article is furnished by the inventor. The material advantages of this machine consists in the use of the lever principle, by means of which the power required to work the machine is considerably reduced, while the pressure is vastly increased. Thus clay may be worked with less moisture than otherwise, and the bricks still be perfectly smooth, square and solid. In this way they are handled with greater ease, are less liable to injury, while the process of drying is shortened, and damage from rains thereby avoided. It is claimed by the manufacturers that the machine may be made to produce fifty thousand bricks per day-the rate of production in nowise

interferes with the quality; a fair day's work, they state, is from thirty to thirty-five thousand. To make this lastnamed amount, one strong horse, two men to produce the clay, one man to sand the molds, one man to strike, two men to remove the bricks and one man to dump, are required.

"The body or box, BB, has inside of it a vertical shatt. H. which is turned by a horse attached to the sweep, A. On this shaft are knives to break up and mix the clay; also three forcing knives, six inches wide at the bottom, to push the clay into the molding box, C. In the molding box is a platen, D, worked by a rack, E, and toothed arc, F, which receive motion through a slotted arm, G, from a crank, H, on the horizontal shaft, I, which shaft is turned by the vertical shaft by means of bevel gearing, and makes about three turns to one turn of the vertical shaft. The molds, J J, are pushed in through the side, K, and are brought forward under the molding box by drawing forward the rack, N, by means of the toothed arc. M. on a shaft which is worked by the hand lever, L. When steam or water power is to be used, the inventor proposes, instead of the hand lever, to substitute gearing, by means

of which the machine will bring forward the molds. As soon as the mold is brought under the molding box, the platen is forced down and presses the clay into the mold. During the downward movement of the platen, the slotted arm, G, gives such advantage of leverage to the crank, that the pressure is very strong; and during the upward movement of the crank the leverage is short, and the lift is quick. As soon as the platen is lifted, the mold is brought further forward into the fountain, J, in front of the molding box. During this forward movement of the molds, the bottom of the front of the molding box shoves off the clay level with the top of the mold, and thus forms the upper surfaces of the bricks. Lest stones or other foul substances in the clay, should be caught between the edge of the mold, and the edge of the molding box front, and cause breakage, there is a slide the under side of which is beveled so as to rise if any hard substance is forced against it. There is a slide or cam on the slotted lever, which regulates the press from one to six inches, and a nut with a handle to it, as shown in the engraving."

It was patented through the Scientific American Patent Agency, on the 27th June, 1865, by Henry Martin, and assigned to Bradford & Renick, 71 Broadway. New York, of whom further information may

THE London Atheneum defines the meaning of the title F. R. S., as a man who Fairly Represents Sci-

Hold on to the Running Board.

As the express train from Toronto was approaching Cornwall station, recently, the brakes were whistled down, the train backed up, and disappeared around the curve. After a delay of about ten minutes it came forward to the station. It was ascertained that the fireman had been out on the engine putting tallow in one of the cups. The train was running at full speed, and reaching the curve about a mile and a half west of the station unobserved by the fireman, the engine of course swerved as directed by the curve, causing the unfortunate man to fly off at a tangent. Singularly enough the

MARTIN'S "CHAMPION" BRICK MACHINE.

ing to pick him up, he was found "marching on" to , city ?" meet it .- Cornwall (C. W.) Freeholder.

A Choice Bit.

It seems there are some novelties recently discovered in the steam engine not generally known. We find the following lucid and astounding description in the New York Herald. It is about a new steam fire engine built at Manchester, N. H .:-

"It is the most powerful machine ever in use in this city, and considering the apparent scanty area of its motive power, it is in our view a marvel of beauty, symmetry and power. The boiler is only thirty-six inches in diameter and sixty-five inches in length, containing the almost incredible number of three hundred and thirteen copper tubes, twenty-four inches long and an inch and a quarter in diameter, thereby exposing a surface to caloric operation capable of generating a pressure of steam for instant work in about nine minutes. The pumps are two in number, of double action, and the steam cylinders, eight inches in diameter and twelve inches stroke, all working on the same piston rods, and all the fittings secured with the most durable mechanical skill, by which the harmony of motion at full work is as true to time as the most accomplished composer in the science of music could render his creations captivating in the highest degree. The materials used in the construction of this model of beauty in the steam engine are each and all of the choicest articles in their respective kind, such as the best boiler plate iron

turned brass and copper where such things are use The various and numerous range of apparatus no actually in action with the machine itself when a work, are curious and pleasing in an eminent degre from their positive utility, such as the signal lantern the wheels and brakes, the driver's seat and lamps oil cans for the journals, self-supplied; signal which tle, a jackscrew, a coal bucket, capable of contain ing as much fuel as would work the engine for two hours at the highest pressure; a complete set of noz result was not at all serious, for on the train return- zles, of every bore and dimension, to provide against accident in the event of the one at work becoming de ranged or disabled, and a

cased in wood and overlaid with Russia iron, hoor

with bands of brass, a brass dome and funnel casin

with india-rubber valves and polished mountings

hose one thousand feet long of the best tanned bullock hide, riveted in copper and capable of throwing, with great force, two, three or four jets of water at a time, a distance of upwards of two hundred and sixty feet from the nozzle. The second test was by taking the supply from an inexhaustable quantity in the river, and this being accomplished on the hydrant principle and from suction the results were most gratifying in every respect. It may now be averred with the utmost confidence, and without the remotest apprehension that anything rational can be said to the contrary that in this one production of scientific and mechanica skill the city of New York is in possession of the most powerful, the most complete. and for all the purposes for which it was designed and constructed in practical utilitarian and instant operation, a fire engine which stands as a model upon which all the world beside can fashion machines of kindred tendency, but the doubt is, can the combined skill of the whole world produce a better or suggest an improvement in the design and execution of the Metropolitan Fire engine of New York

artic

look

who

of 18

chin

will

[We should say, no !- EDS.

STATISTICS .- A curious calculation has been made lately by a savant, well known in Paris for his peculiar antipathy to the fly. He collected three thousand flies in a room measuring two cubic meters; on the floor he spread a pounded loat of sugar. At the end of four days he went in to investigate the result of his experiment. There remained a teaspoonful of sugar. This statistician therefore calculutes that, sugar being at the rate of thirteen cents a pound, a fly costs the country twenty cents from its birth to its demise.

[That is, if fed on loaf sugar.—Ens.

New Combustible.-I see the mention of a new combustible, invented by a gentleman who very appropriately bears the name of Stoker. It appears to be very pure charcoal, finely ground and made into a paste with starch. The paste is molded into cakes or balls of different sizes, and then dried. When perfectly dry these may be lighted with a lucifer match, and will continue to burn steadily, like German tinder, without giving flame or smoke. The combustible is intended for heating urns, chafferettes, etc .- Paris Correspondent of Chemical News.

A MODEL miniature locomotive, made of gold and silver, with a ruby for a head-light, and costing \$4,000, is on exhibition at Taunton, Mass. Its wheels are driven by clock-work.

How Paper Collars are Made.

on, hooper

nnel casin

ountings o

s are used

paratus not

If when a

ent degree

al lantern

and lamps

gnal whis

of contain.

ine for two

set of noz-

de against

oming de

ed, and a

feet long

d bullock

opper and

ing, with

three of

a time, a

feet from

cond test

e supply

ble quan-

d this be

n the hy-

from suc

ere most

rred with

ace, and

t appre-

g rationcontrary

oduction

chanica

w York

he most

omplete,

oses for

ned and ical util-

eration,

stands

hich all

n fash-

red ten-

is, can of the a bet-

nprove-

nd ex-

politan

York

pecu-

thou-

rs: on

At the

result

nful of

that.

and, a

to its

new

ry ap-

into

cakes

When

The

affer-

Veus.

and

sting

Its

We find the following in an exchange:- "At the ad of the first room are piles of pure white paper, saiting their turn to be guillotined in a machine mished with twenty-two shear blades, which cut he paper into the requisite strips for the collar, on isely the same principle as a gigantic pair of scisis, thus leaving no rough edge. The product of paper mills is consumed in this factory, and at he rate of a tun to a tun and a half per day; the age production being about one hundred thousand plars per day, which find a ready sale, despite the amerous imitations with which the market is flooded. om the hands of the attendant who turns out the pure, even strips of paper, they pass into the hands of another fair executioner, who brings the incipient har nearer its birth by passing it through another air of knives, by which it acquires shape in an inant. Still another machine marches relentlessly up d down, and as the collar leaves its iron embrace, e three button holes are visible, large, clean cut, m holding and easily handled.

"The collar is now placed between two dies or clamps, passed under a quick, heavy pressure, and emerges again stamped with that close imitation of stitching which renders it so perfect an imitation of its linen brother that the difference can hardly be distinguished; it is stamped also with the size and corporate mark. Next comes the crimping machine, which draws the curved line on which the shape of the collar turns, and which by allowing space for the cravat insures a smooth fit. They then pass through the nimble hands of a damsel, who with deft fingers flying with lightning-like rapidity, turns the collar over as no machine has yet been able to do; from these hands it passes to the molding machine, where it is bent round into perfect shape and fluished as a perfect collar.

"This process is an important one, requires skill in the operator, and strength in the paper, which must be of the best to resist the immense strain required to mold the collar into perfect shape.

"The collar is now, as it were, born shapely, trim and elegant, and ready to adorn the neck of the most fastidious, having passed through seven distinct proesses in its manufacture. It is once more taken in hand by women and packed into boxes by the hundred, or in the well-known little round boxes of ten each, which are so convenient to toss into a valise when off for a week in the country or elsewhere. For the item of boxes the company expend over \$60,-000 per annum. The first machine turned out the collar entire, performing the whole work at once, but slowly and imperfectly; but the genius of the inventor, nickened by the rapidly increasing demand for the article, added improvement after improvement, by one machine after another, until the manufactory is now capable of turning out five millions of collars per month.

"The American Molded Collar Company employ in this manufactory seventy neatly-dressed, intelligent looking American women, most of whom are young. These women earn a dollar per day, and their work is clean, healthy and not very laborious. Mr. Gray, who first commenced to manufacture in the spring of 1863, has now eight patents on collars and machine, having previously secured them in Europe; three of the directors of the Company went there this summer with skilled mechanics and American machinery, to take measures to establish the manufacture in England, France and Belgium, where they will probably soon attain that popularity which the American molded collar has achieved in this country."

Value of City Property.—The lot on the corner of Broadway and Ann street, in this city, made vacant by the burning of Barnum's Museum, was bought by Mr. James Gordon Bennett, who proposes to erect thereon a fire-proof building for the Herald. The lot is 55 feet by 100 feet, and \$450,000 was paid for it, and \$200,000 besides to Mr. Barnum for his mexpired lease of it. Non-residents can thus get an idea of the value of some city lots.

THE Great Britain, a broad-gage English locomolive, with 18-inch cylinders and 24-inch stroke, has worked up to 1000-horse power. So says the London Engineer.


WING'S MILLSTONE DRESS.

These engravings represent a new method for dressing millstones, for which it is claimed that unusually good results are obtained. The appended description is furnished by the inventor:—

"Fig. 1 is a plain view of a runner stone inverted, having my improved dress.


"Fig. 2 is a vertical section of the same, showing the form of the furrows.

"Fig. 3 is a vertical section of a portion of a pair of millstones, dressed in the usual manner, showing the feed opening, or bosom, a.




"My improvement has a two-fold object, viz.: to effect the grinding as near to the eye as possible, thereby saving the power required for driving the stone, and by so doing to carry off the flour in the furrows and prevent its keeping between the lands of the stone as it approaches the periphery, whereby overgrinding is produced from greater friction, and retention of the flour between the parts of the stone that revolve the most rapidly.

"In the ordinary mode of dressing millstones for grinding wheat flour the lands run of equal width, and form parallel lines from the periphery to the eye, leaving the furrows of equal width and parallel with the lands. I take from the lands, or surface of the stone, and widen the furrows as they approach the center.



"The furrows, in my method, consists of two series—the leading furrows, C, which diverge tangentially from the eye, D, outward to the periphery, diminishing slightly in width—and parallel with each of these are two or more auxiliary furrows, E, which fill the angular space between the leading furrows, and which are rendered shorter by their intersection with the next contiguous furrow. The bottoms of both incline, as at F, Fig. 2; the lands between extend to the eye, thereby carrying the plane of the stone fully up to the eye. At this point the furrows are made deep enough for the grain to enter, whereas some millers reduce this surface around the eye for a



short distance below the common plane of the lands. This opening or hollow is called the bosom, and its object is to faditate the entrance of the grain between the stones. By my plan of dressing, however, this is rendered wholly un-

necessary, and its evils obviated.

"To grind flour properly the kernels should not be pulverized between the lands, but between the sloping and inclined sides of the furrows, which prevents the flour from being spoiled while grinding, and this is accomplished by the method of dress which is here shown, the object being to make the lands act as guides at the eye, to direct the grain into the furrows.

"A further advantage is that it can be used in any stone where there are straight furrows without dresslation.

ing any more of the lands away than my furrows require. When introduced it does not require one-half the labor to keep the stone in order that the common dress does, and it is also an improvement in grinding damp grain of any kind."

The inventor will sell rights of mills, towns, counties or States on reasonable terms. Patented on March 21, 1865, through the Scientific American Patent Agency. For further information address Abram Wing, Mayville, N. Y.

Alloys.

Every thoughtful metal worker, who has his hands too full of his daily employment to spend much time in experimenting on the properties of the metals he uses, must have often wondered how it came to pass that with all our boasted knowledge of chemical and metallurgical subjects, we have as vet only succeeded in inventing some half-dozen useful alloys. Brass, pewter, gun-metal, German silver, and type metal are really all the alloys that we can name as entering into the manufacture of the more common articles of trade in this country. The causes of this apathy in experimenting on the properties of mixed metals are manifold. The practical metal-worker of the present day is generally ignorant of the chemistry of the metals he uses; and even if he were well informed, he would be too busy fighting the great battle of competition to set himself the extra task of experi-menting upon alloys. But metal workers will turn round very naturally and ask how it is that practical chemists, whose business is to make experiments, do not investigate the capabilities of metallic mixtures more frequently than is at present the case. We fear very much that the only answer to be given to this is that scientific chemists of all countries have, almost without exception, been bitten with a mania for nearly exclusively pursuing their researches and expending their talents upon organic compounds.

This department of scientific chemistry is so vast and so fruitful in results that it is quite a rarity to see an article in a scientific journal upon a metal or metallic compounds. Even those chemists who have not wholly given up the study of inorganic com-pounds seem to apply themselves to analytical obser-vations or to the investigation of the rarer metals, As an example of the want of knowledge of the capabilities of alloys, we may instance the discovery lately made by M. Pelouze, of the French mint, that the best metal with which to alloy silver is zinc, and not copper, as we have always believed. Now, considering that silver has been known from the remotest ages, and zinc, at any rate, since the birth of modern chemistry, it seems singularly strange that no one ever thought of trying the effects of these two metals on one another until now. To take the case of iron, a merely cursory examination of the second volume of Percy's "Metallurgy" will show that some of the very simplest questions relating to this most common and important metal remain as yet unanswered. Such an apparently vital matter as the formation of steel is a bone of contention at nearly every meeting of the French Academy of Sciences, one party persisting in declaring that no steel can be made without the intervention of both nitrogen and carbon, while the other side as manfully contend that nitrogen has nothing to do with cementation, carbon being the only element concerned in the process. This example shows that not only does the action of one metal upon another, in a state of combination, require patient study, but also the effect of the addition of varying proportions of the metalloids, such as carbon, phosphorus, silicon, sulphur, etc., to different metals, remains still to be discov ered.—Chemist and Druggist.

Packing Pistons.

Before a vertical engine piston is packed it should be wedged into the exact center of the cylinder by driving blocks on four sides, and verifying the work by exact measurements with a stick that must both "touch and go" on the rod. The packing will then hold the piston true, and the engine will work far better than where the piston is packed by a guess.

It is said that in and around London, at the present time, no less than about 150 miles of railway are in course of construction, involving an outlay of thirty millions sterling at the ordinary rate of calculation.

- R. H., of N. Y.-We notice your letter in relation to the acticle on the slide valve, and the criticisms thereon. Also your article of the side varve, and the criticisms thereon. Also your inclosed tracing. You are correct in one point, which is, that in the first diagram the eccentric is on the upper side, when in order to turn the crank as the arrow points it should be on the lower. This is not a material difference, as the main object was to show the position of the eccentric with relation to the crank. In the second diagram the same position is shown, as we well know, and is there pointed out as an error purposely. The tracing of the valve and eccentric sent is a fancy sketch, which shows nothing except that the parts in question, as you have drawn them, are wrong, and would never work. If you will take the trouble to go on board a steamer you can satisfy yourself by observation of the of our article.
- B. C., of Del. There are only two kinds of primers used in artillery service—friction and percussion. A percussion primer is a quill full of fine powder, capped by a percussion wafer aled powder and fulminate of mercury. A friction made of meased powder and running or necessary primer is a tube full of powder, with a spur on top full of a co-position that explodes by friction, and is set off by a wire pul through it by a lanyard or rope.

J. A. J., of Ill.—In summer the sun rises north of east west. For histyearly track through the see a celestial globe.

T. M., of Conn .- A correspondent puts the following query:—"Suppose the piston in the middle of the cylinder, is there any more steam room on one side than the other? I should say not." You would be in error, then, for the capacity of the up-per side, supposing the engine to be vertical is less than the lower by the diameter and length of the piston rod in it.

C. H. B., of Mass.—Windows are crystallized, or made

to imitate ground glass, by dissolving epsom salts in hot beer or a weak solution of gum arable. You can make any pattern or border you please, by cutting out a design on a sheet of paste-board, and rubbing the design with a damp cloth.

L. W., of N. Y .- One kind of tollet rouge for the com-

B. P., of III. Rupert's drops are simply melted glass dropped into water. They form a bulb like a pear, with a stem.

The thick end may be struck with a hammer without injury, but if you break the tail the whole affair will explode

J. R., of N. J .- The density of steam depends upon the and if the steam is saturated-not superheated-the pressure bears a constant relation to the temperature. On page No. 48 of our last volume you will find a table of densities of sat-urated steam at various temperatures, from 136° to 288°. At 136 77° a pound of steam fills a space of 132°6 cubic feet; at 242°90°, of 15:11 feet: at 288:25°, a space of 7:202 feet.

J. D. H., of Ill.-Find illustration of apparatus for disrits of turpentine from wood on page 24, Vol. XI. It was invented by Seth L. Cole, Burlington, Vt.

1.., of Pa.—Several different machines for mining coal have been described in the English papers, but we d know that any of them has been practically succe ed for bitu

A. P., of N. Y .- You ask us to tell you all about making rods to find mines in the earth. We do so with pleasure; they are

Q. B. S. M., of Md.-Any good treatise on geometry

will give you the information about the cycloid.

A. A., of N. Y.—It is quite common for different perns to have the same ideas. Your experience on this a ve valuable to yo

D. W., of Ill.-Your specimens are common quartz, of

G. W. J., of Me .- A Blanchard lathe will make your toy complete, from stem to stern, out of a single blo of such a trade you must be the judge.

R. G. N., of Wis.-You can determine the altitude of the sun on land by means of a quadrant and an artificial horizon.

For the arrangement of the latter, consult a book on navigation.

C. B., of Mass.—For Patent Report apply to your M. C.

Patentees are not entitled to copies. You may get one as a favor.

A. A. H., of Me.—There is no cement in the world that will line a revolver cylinder, that is worn out, so as to make i

W. E. C., of Conn.-We have no means of judging positively what amount of fuel you will save by a heater, but the economy will be great—certainly 10 per cent. You can inject hot water to your boilers with a common young, provided the same is so arranged that the feed water flows into it. Take a piece square rubber, a quarter of an inch less than your stuffing box, wind this with cotton yarn—lamp wick—until the gasket so made fits the stuffing box; cut it in lengths, so that it will meet at the ends, and pack the valve stem with it. A piece of lead pipe, with a piece of hemp gasket run through it, is a good thing to put in the bottom of the piston-rod stuffing box. The pipe must be hame first. Put a common hemp gasket over it.

C. C. B., of Pa .- An idea is not patentable unless it takes some palpable form, as in a machine, a design or a new cess. Your project for operating balloons by ropes—hauling t down when they reach a certain altitude—has been practiced m

W. E. S., of Ind .- To make matches consult Vol. XII., where you will find a variety of recipes for the purpose. We called upon sometimes to publish the same recipe an unreas ale number of times.

Queries on Belts Answered.

MESSRS. EDITORS:- I have read with much interest the various articles relative to belts. I have known of power being let by the inch of belt running 800 feet per minute, which is a poor way of letting power for the landlord. I have charge of an engine that runs 40-horse power. It has worked as high as 65horse power, by the rule of 33,000 pounds one foot high per minute with the same width belt, viz., 16 It runs 1,600 feet per minute, which would make 32-horse power according to theory, but practice shows double this power.

I submit the following answers to questions concerning belts in your last issue:-

In my experience I have found that a double belt would do the work with ease that a single one of the same width could not do. Mr. Arnold's plan of running two single belts, one over the other, is new to me, but there is reason in it.

Belts that are soft on one side get crooked, so that in running they go nearly off the pulley, when the resistance of the machine that is driven causes the belt to slip off.

I never knew of a belt that did not run on a tight and loose pulley to twist. Some machinists make the tight pulley a little larger than the loose, so as to have a tight belt. Such a pulley is almost sure to twist the belt, especially if there is a space between the two, and the shipper is very near the pulley.

Opinion is pretty equally divided on which side out the belt should be run. A belt will drive more on the hair side. I think it will wear longer on the flesh side, as the quality grows better as it wears from the flesh to the outside.

Nothing in my experience is so good for belts as neat's foot oil, and but little of that.

A straight-faced pulley is much better than crowned one. A crowned pulley keeps an unequal tension on the middle and edges of the belt. Crowned pulleys are only useful, in my opinion, to unskillful millwrights,

Lacings crossed on the inside are more liable to cut

on each other by the pressure on the pulley. A. M. W New York, July 20, 1865.

Tempering Mill Picks.

Messes. Editors:-In your journal of July 8th a correspondent wishes you to publish what you know about tempering mill picks. As he does not wish to pay for any one's experience, I will give mine gratis. A mill pick should be of the first quality of cast-steel, and should not be overheated; heat of a charcoal fire is better than stone coal. If you use stone coal burn out the sulphur before heating the pick. Heat the point and mass of the pick a straw color; sharpen and refine by dipping your hammer into water, and hammer until nearly cold; heat repeatedly if neces sary; sharpen both ends before tempering. To tem per, heat very slowly and uniformly; heat to a light cherry red or dark straw; temper in a solution, say, to two gallons of clean water add half pound of alum, one ounce of saltpeter dissolved; then add as much clean salt as will dissolve; dip the point in the mixture as far up as you wish to temper; move it around until sufficiently cool, then rub the point briskly in the scales on the anvil block, then plunge the pick in cool water before the temper runs down. If properly done you will have as good a pick as you wish for.

A MILLER OF THIRTY YEARS' EXPERIENCE. Wiscay, Alleghany Co., N. Y.

The Main Spring Question.

Messes. Editors:-On page 36, present volume, in the article on "Main Springs," etc., it appears to me that your correspondent is increasing, rather than diminishing, the liability or the main springs to break. If the spring is thicker in the center, or raised, as he says, having to bend around the arbor and itself, it would have the tendency to fray itself to pieces by the center being the larger and the sides the smaller arc of a circle. The same may be said of the flat spring; that the outside of a spring is a larger arc of a circle than the inner, by the difference We have said, however, that in most cases the eccen-

of the thickness of the spring, but in the proposed spring it is increased by the difference in addition to the thickness by the hight that the center is raised. The proper spring would be stronger, but would, I think, possess this additional cause of self-destruc-My observation is that the changes of the wind have more to do with breaking main springs than any thing else; let the wind suddenly change from north or northwest to east or southeast and I expect and usually find a harvest of watches with broken main spr.ngs, those that have been in ten, fifteen, or twenty years, equally as well as those that have been in only as many days. And it does not make any dif. ference, either, that the watch was in the pocket or hung up at the time of the change of wind. Another cause of broken main springs is, the sultry weather of dog days, in August, when nearly one half of our work is to repair watches with the spring broken.

I do not know what connection there is between a change of wind and a main spring, but my own observation and that of other watchmakers of large experience confirm the above remarks. The breaking of the main spring is the lesser evil, the breaking of the center pinion, which so frequently follows that of the spring, is the greater; if by some means that could be prevented it would be of more benefit.

A friend has suggested another source of the breaking of springs-thunder storms, when it is not unusual to have a number break, hanging on the FRANCIS STOWELL. board.

A Problem of Raising Weights.

MESSRS. EDITORS:-Can you tell me what will be the constant strain on a rope raising a weight of 3,000 pounds, ten feet per second, perpendicularly? Also, what is the percentage of loss of power in the crank, in changing the reciprocating motion of a piston to the rotary motion of a shaft?

What authority can you name to me which treats of these subjects plainly and simply?

New York, July 16, 1865.

[The strain on the rope is increased beyond that of the weight only while the velocity of the weight is increasing; after a velocity of 10 feet per second has been imparted to the weight then to maintain this requires only the strain of 3,000 pounds. The increased strain, while the velocity is being given, depends on the rapidity with which the velocity is imparted. To impart a velocity of 32 feet in the course of one second requires an additional strain just equal to that required to sustain the weight. You will find this problem fully discussed in "Bartlett's Mechanics."

The loss of power in changing reciprocating is rotary motion by the crank results only from the increased friction: the amount of the friction depends of course upon the material of which the bearings are made, the perfection of the workmanship and the quality of the lubricator. The best treatise on friction is to be found in "Morin's Mechanics."-EDS.

Noise an Indication of Rain.

MESSRS. EDITORS:-Will you explain through your paper why sound travels better just before a storm? People living ten or fitteen miles from a railroad on distinctly hearing the cars, exclaim, "It's going to I. T. E.

Grand Rapids, Mich., July 15, 1865,

[The distance at which sounds can be heard depends much on the state of the atmosphere; but if you live north or west from a railroad, you would hear the cars more distinctly when the wind was from the south or east, and that wind would be likely to bring rain.-EDs.

The Crank and Eccentric.

MESSES. EDITORS:-I have repeatedly seen statements in your p. per to the effect that the crank and eccentric were always at right angles to each, or near This is not so; in some cases the crank is with eccentric, as in a beam engine for instance. think this statement should be corrected in your next issue.

Mystic Bridge, Conn.

[We do not remember to have stated that the eccentric was always at right angles with the crank, because we know better; if we did it was an error.



tric was at right angles with the crank, as it is. Individuals can set their doubts at rest on this point by looking at any locomotive, horizontal or vertical engine. The illustration of the beam engine is not a happy one, for with a long toe cut-off the lead, or what amounts to it, the travel of the toe before it touches the lifter is so great that the throw of the eccentric is nearly with the crank; but for this lead the steam eccentric would be where the exhaust eccentric on the other shaft opposite it is nearly at right angles with the crank.

roposed

lition to

raised.

vould, I

destruc-

he wind han any

m north

ect and

n main

een, or

ve been

any dit.

cket or

sultry

ly one-

Spring

ween a

y own large

break-

eaking

vs that

is that

of the

on the

ELL.

will be

larly?

in the

of a

treats

R.

hat of

is in-

d has

this

ity is

the .

strain

e in-

ends

rings

g to

ould

rom

r to

and

ear

ith

We also said in the article on "How to set a Slide Valve," that levers made no difference in the relative positions of the crank and eccentric. This assertion has been criticised by correspondents, but, unless our eyes deceive us, it is quite correct, for we have taken pains since writing that article to examine working drawings of oscillating engines with poppet valves, side lever engines, steeple engines, locomotives and table engines, and we find that, with but one exception, where the valve is worked by a rack and pinion, the diagrams published are correct as regards the relative position of the crank and eccentric.—

RECENT AMERICAN PATENTS.

The following are some of the most important improvements for which Letters Patent were issued from the United States Patent Office last week; the claims may be found in the official list:—

Machine for Refitting Stop Valves.—The valves of that class commonly known under the term of "globe valves," are usually made with conical valves secured to a screw spindle and fitting into a conical seat. If a valve of this class becomes leaky, the only way to refit the same, heretofore, has been by regrinding, or, if that operation was insufficient or too slow, by unscrewing the stop valve from its connect-ing pipes and sending it to the shop, where it would be refitted in the turning lathe or with the proper tools. Either of these operations causes much loss of time and money. A simple and effective device, by which the operation of refitting said stop valves could be carried out in a short time, and without disconnecting the valves from the pipes, has been a desideratum which will be hailed with delight by everybody who is troubled with leaky valves. The device which forms the subject matter of the present invention, and which is intended to fill the want above pointed out, consists of two parts-one for refitting the valves and the other for refitting the seats. The former consists of a conical concave mill made in the precise form which the valve is to have, and provided with a yielding internal center, in combination with suitable bearings, two for said concave mill and one or more for an adjustable center, in such a manner that by removing the valve from the seat and placing it between the adjustable and the yielding center it is at once in the proper position to be acted upon by the concave mill, and a few revolutions of said concave mill, imparted to it by an ordinary ratchet brace, or any other suitable means, produce the desired effect on the valve and bring it in the requisite shape to fit into its seat. The part for refitting the seats consists of a conical mill or reamer with a cylindrical stem, to be used in combination with a guide, which is made to take the place of the stuffing box and nut through which the valve spindle passes, in such a manner that by removing said box with the valve and valve spindle, and inserting therefor the conical mill and its guide, a few revolutions given to said mill will bring the seat in the proper shape, the whole operation being performed without removing the stop valve from its connecting pipes. The inventor of the above device is Samuel Wing, of Monson, Mass. Geo. R. Topliff, of 60 Pine street, New York (joint assignee), may be addressed for further information.

Adding Machine.—This invention consists in the employment of a revolving disk, marked on its rim with a series of figures, commencing at 1 and ending at 100, or any other figure, and provided with cavities to receive a pin, by means of which said disk can be rotated, and with a helical or cam groove in its face, to operate in combination with a stationary abutment, and with a hinged index and stationary dial, marked with figures from 1 to 100 near its circumference, and with other figures, from 1 to 16.

which the index plays, in such a manner that by inserting a pin in one of the cavities opposite to any desirable figure on the circumference of the dial the revolving disk can be turned on its axis for a distance equivalent to the figure which was opposite the respective cavity, and, at the same time, the index moves in the cam groove, and the figure in question is registered; and, by repeating the operation with the same or other figures, such figures are added up and the sum regis ered on the dial and disk. T. T. Strode, of Mortonville, Pa., is the inventor.

Safety Valve for Steam Boilers.—This invention consists in operating two or more valves on the same lever, said valves being held closed by the action of a weight or spring, in such a manner that when the pressure of the steam rises beyond the desired point the several valves open simultaneously, and the combined areas of the openings thereby obtained for the escape of the steam is greater than that of a safety valve of the ordinary construction; the invention consists, also, in an adjustable fulcrum, applied in combination with the lever, from which two or more valves are operated, and with a weight or spring holding said valves closed against the action of the steam in such a manner that the time when the steam blows off is regulated by shifting the fulcrum instead of by a change in the power exerted by the spring or weight to hold the valves in their seats. S. G. Barker, of Dunmore, Pa., is the inventor.

Calendar Clock .- This invention consists in a reciprocating or oscillating slide, marked with the names of the months, commencing with March and ending with February, and provided with openings opposite to said names, and with a projection which bears on a wheel, the face of which is marked with figures, from 1 to 3I, to indicate the days of the months, and which is provided with eleven concentric grooves and oblique channels leading from the periphery of the wheel to the first groove, from the first groove to the second, and so forth, in such a manner that whenever the projection of the movable slide comes opposite to one of these channels said slide drops or moves and a new name of a month is brought in view, and opposite to the figures on the rim of the month wheel. The time when the slide changes from one groove to the other is determined by the position of the communicating channels, which corresponds to the number of days of the different months. T. T. Strode, of

Mortonville, Pa., is the inventor.

Machine for Rounding and Polishing Balls, Etc.

—This invention consists of a machine composed of four, more or less, longitudinally sliding rotary mandrels, radiating from a common center, and provided with chucks at their inner ends, in combination with suitable mechanism to force these chucks alternately up against the ball to be turned or ground, and with a milling tool or grinding wheel, in such a manner that two of the chucks will clamp the ball at a time, and the ball is thereby turned in either direction, while the grinding wheel or milling tool is held in contact with the surface of the ball by means of one or more screws or by an adjustable weight. The force with which the grinding wheel or tool is forced against the surface of the ball can thus be regulated at pleasure. The position of the revolving chucks, and the time when the same grasp the ball, are governed by a double cam and by weights or springs, and said chucks are so shaped that they grasp the general surface of the ball, and that cavities and projections occurring on the surface of said ball will not be able to disturb the correct central position of the same. John L. Knowlton, of Philadelphia, Pa., is the in-

Padlock.—This invention relates to a padlock of that class in which the shackle engages or locks itself when forced down into the lock. The invention consists in a novel means for throwing the shackle out of the lock when liberated from a catch and bolt which holds or locks it, and for retaining or holding the catch and bolt, when the shackle is out from the lock, in proper position to receive the shackle when the latter is pressed or forced into the lock. The invention further consists in a novel arrangement of the means aforesaid with the catch, which operates in connection with the bolt for locking or securing the shackle. H. Jackson, of New York City, is the inventor.

cumference, and with other figures, from 1 to 16, Lock.—This invention relates to a lock for pianor more or less, on the sides of a segmental slot in tortes, sewing-machine cases, and articles generally mountain.

having hinged lids. The invention consists in the employment of two bolts of segment form, provided with shanks and connected with a tumbler in such a manner that the bolts will, as the tumbler is operated through the medium of a key, work in the path of a circle in and out from the lock case, in order to lock or unlock the article to which the lock is applied. E. L. Gaylord, of Terryville, Conn., is the inventor.

Drills for Oil and Other Wells.—This invention consists in making a drill, for boring wells, of fast and movable cutters combined together in one stock, in such a way that the movable cutter will be the leading cutter, and, after it has made its stroke, will receive a blow on its end from the descent of the fast cutters, thereby driving it past them into the rock. Elias Baker, of Pittsburgh, Pa., is the inventor.

Method of Cutting-out Buttons from Ivory, Bone, Etc.—This invention consists in a novel method of cutting buttons from ivory, bone, vegetable ivory, wood and other substances. In the art to which this invention belongs, as now conducted, buttons are cut out of plates or disks of the material used, by placing the disks in a lathe and bringing up against them, on each side, cutters of the proper shape, which cut out and separate the buttons from the said material. That portion of the material which is left after the separation of the button was accounted as waste. This is especially true of the manufacture of vegetable ivory into buttons. This substance comes in pieces of small diameter, not great enough to furnish the ordinary-sized buttons for coats and other articles of apparel, and yet so much larger than one button as to leave a great part of the material unused. The object is to utilize this waste portion of the material, which is accomplished by cutting out therefrom one or more rings at the same operation which produces the button. Charles H. Bassett, of Birmingham, Conn., is the inventor. Assigned to The Birmingham Button Company, of same place. New York office, No. 102 Duane street.

A Fire-arms Commission.

Mr. Erskine S. Allin, master armorer at the armory in Springfield, has been commissioned by the War Department to visit the various arsenals in England, France and Switzerland, and to be present at trials of breech-loading fire-arms soon to take place in England and Switzerland. Here he will visit Ghent, Antwerp, Brussels and Liege, the town where the famous Belgian rifles are made, next Paris and other cities in France, and finally Switzerland. The rifle trial in the latter country will begin September 2d, probably at Geneva, and will be open to competitors from all over the world, a prize of \$5,000 being offered for the best breech-loader, besides the sum which the Swiss government will pay for the patent right of the gun. Mr. Allin will return to London so as to be present at a government trial of breech-loading rifles in that city, September 30th. On his return, about three months hence, he will make a report to the Department of the result of his observations. Our Government could not well have selected a more suitable agent than Mr. Allin for this purpose, as he is admirably qualified for it by his long connection with the armory in its practical workings, and his well-known mechanical ability. D. De Gothal, teacher of languages, and for some time a clerk at the armory, will accompany Mr. Allin as interpreter .-Springfield (Mass.) Republican.

An Oil Well Destroyed.

Well No. 19, United States Farm, on Pit Hole Creek, was destroyed by fire about seven o'clock P. M. on the 3d inst. The well was finished that day, and was flowing about two hundred barrels, and no tanks being up the oil was allowed to flow on the ground. Some twenty persons were standing in and around the derrick, some of whom it is feared were unable to escape, for the ground for forty feet around was one sheet of flame in a moment, Three men are known to be seriously burned, and only saved their lives by jumping into the creek. The well is still flowing and burning.

THE Pittsfield (Mass.) Eagle says the work on the east end of the Hoosac tunnel is progressing at the rate of sixteen feet a day into the solid rock of the mountain.

Improved Barrel Roller.

This engraving illustrates an improved apparatus for rolling barrels, and its form and application can be seen at a glance.

It may be described as a pair of tongs with disks, A, revolving loosely on the outer ends, the disks of such size as to easily enter within the chine of the barrel. The tongs are so made that the barrel may turn without rubbing when the disks are not exactly in center. The opening between the handles is such little expense.

that the natural fall of the arms, in pushing or pulling, will press the disks against the barrel head, so that the heavier the load is the more securely will it be held. In using this tool, it is not necessary to insert the disks within the chine, but if they are run up along side, so as to be nearly inserted, and then pressed together, at the same time pushing or pulling, one half revolution of the barrel will throw them into place. When on the barrel the tongs and barrel form a combination similar to a common wheelbarrow. but the device is much more easily handled than a wheelbarrow carrying the same load.

Any person who has ever rolled a heavy barrel, especially down hill where the strength is used to retard,

instead of to hasten it, will see at once how readily one barrel can be guided, held back, or pushed forward by the aid of this machine. Many severe injuries have been caused by the carelessness, and sometimes by unavoidable accident, of persons rolling heavy casks down declivities, where it is necessary them to stoop over in very uncomfortable positions, and use heavy leather gloves to retard the speed of the barrels. In such cases, a tool of this kind would be much more efficient, for the user could bring his whole strength into action, instead of a part of it only, as in the former case. The heaviest casks, requiring the services of several men, can be handled with ease by this machine by attaching a rope to the handles so that a number of men can take hold. In such a case as rolling down a wharf and then up a gang plank, when the cask reaches and rests at the lowest point, the apparatus can be just turned over and the same men that let it down can pull it up again. In short, there is no case of barrelrolling in which it is not superior to hand labor. This apparatus was patented April 25, 1865, through the Scientific American Patent Agency, by Henry W. Stephenson of Cincinnati, Ohio, who holds it for sale, in whole or part, to suit applicants. Any person desiring information will address him as above.

LITTLE'S FRUIT GATHERER.

The device illustrated by this engraving is for gathering apples, peaches, pears and other fruit, which generally hang so high as to make it necessary to climb the tree or use some device by which the fruit may be reached from the ground.

No better description of this fruit gatherer can be given than to call it a semicircular rake; A being the teeth thereof, and B the head in which they are inserted. An extensible rod, C, which can be made longer or shorter, to which this rake is attached. enables it to be raised to the highest part of any fruit tree. The fruit is detached from the tree by a raking motion, in clusters or singly, and when severed falls into a long pouch, D, from one of the pockets of which it can be received into the hand. When the rod, C, is extended, the lower pocket, E, is used, but when the fruit is gathered close at hand, the pouch is shortened, so to speak, by a cord, G, which is tied tightly around it between the two pockets. To preserve the length to which the rod, C, is adjusted, a set screw, H, is employed, and I, is an adjustable slide to which the lower end of the pouch is attached. Sometimes, owing to the position of the fruit and other circumstances, the knife, J, which encircles the teeth, constitutes an important accessory to the latter in severing or breaking the stems of the fruit; and for the same purpose the knives, K, may be called into requisition. The upper end of the pouch, E, is held open to receive the fruit, by the metallic strip or retainer, L.

Owing to the simplicity of the device it can be constructed with little difficulty, and manufactured at little expense.



STEPHENSON'S BARREL ROLLER.

A patent for the invention was granted March 21, 1865, to James A. Little, of Danville, Hendricks Coun-



ty, Indiana; by addressing him, any desired informtion can be had.


A fine piece of carpeting, measuring 14 feet by 20, the first of the kind manufactured in Austria, has just been placed in the Museum at Vienna. It prosents a map of the railways of Central Europe, and was produced at Prague.

DESAUSSES'S LOCK PROTECTOR.

Travelers sojourning in ho is have awakened in the morning to the unpleasant consciousness of the fact that their pockets had been rifled in the night; and this in spite of the lock on the door. Skillful thieves take advantage of the small end of the key which protudes through the hole, and by using a peculiar pair of nippers, grip the end so that they are able to turn the key and enter the room; when the key is not in the lock the latter is picked with a skeleton key.

It is to foil burglars who use forceps that this device has been invented.

It consists in forming the key with a square shank,



as at A, and in a plate, B, which fits this shank. This plate works in a recess so that it turns easily in any direction when the door is to be locked, but is held fast by the hasp, C, when the same is vertical, or in such position that the pins, D, fall into a groove, E, in the hasp. When this occurs the key can not be turned from the outside by any contrivance whatever. Thus there is a double lock on the apartment; the door is locked by a key and the key itself is locked.

This device can be applied to the cheapest, as well as to the most costly lock, and can be constructed of four pieces of cast iron, or made ornamental if desired. A patent is now pending through the Scientific American Patent Agency, by J. H. Desausses. For further information address A. B. Justice, No. 14 North Fifth street, Philadelphia, who has the patent for sale.

A LUXURIOUS CHAIR.


We have had a very curious chair in our office for some days past, and it is one of the most comfortable and unique things of the kind we have seen. The seat is composed of sections of india-rubber tubes strung on fancy-colored cords; the back also is so made, and the sensation experienced is delightful. The greatest benefit, however, is derived from the elasticity of the rubber. This gives an easy, springing support to the person, impossible to describe, but not at all difficult to endure. The chair is lighter than those made with springs, is much cooler in summer, and seems in all respects a desirable and useful novelty. It is a fact that all men are not built on the same model, but with this piece of furniture it matters little how fearfully and wonderfully they are made, for this elastic seat supports every part of the person that touches it at once, and does not rest one set of muscles at the expense of another set.

There are also couches, lounges and other articles made on this principle, and for the reasons above set forth they must prove exceedingly comfortable. These articles of furniture are made by the patentee, Mr. Hector Hyves, No. 45 Mercer street, New York.

Some of the Hartford capitalists have brought out the Weed Sewing Machine Company, of Nashua, N. H., and have formed a new joint stock company with a capital of \$200,000 for the manufacture of the machine at Hartford.

Mr. Holloway's successor to the office of Commissioner of Patents has not yet been announced. There are rival claimants.

Scientific



MUNN & COMPANY, Editors & Proprietors.

PUBLISHED WEEKLY AT

NO. 37 PARK ROW (PARK BUILDING), NEW YORK.

O. D. MUNN, S. H. WALES, A. E. BEACH.

Sampson Low, Son 4 Co., Booksellers, 47 Ludgate Hill and, are the Agents to receive European subscriptions nents for the Colsevipio American. Orders senton roundly attended to.

sow 'The American News Company,' Agents, 121 Nassau street, New York.

VOL. XIII. NO. 7... [NEW SERIES.] Twentieth Year,

NEW YORK, SATURDAY, AUGUST 12, 1865.

Contents:

Illustratio

n Olls.... sing the "Congress" Frig-ate.... Packing Pistons.... Notes and Queries...

CAST STEEL FOR BOILERS.

A most intelligent and energetic mechanic, Mr. S. H. Roper, of Boston, Mass., has been for some time engaged in making steam carriages for experimental purposes, with a view to obtain the greatest efficiency for the least weight, and to render the steam carriage an independent, convenient and useful motive power. In these efforts he has been highly successful, and although he regards the carriage more as a plaything than for its general utility, he has pursued the subject thoroughly, and decided some questions which are interesting to the mechanical community. These relate chiefly to a reduction of weight for steam engines and boilers of a given power. This steam carriage weighs but 450 pounds in complete running order, with water for eight miles. The cylinders are double, direct-acting, $3\frac{3}{4}$ inches bore and 10 inches stroke.

The boiler is the most remarkable detail, and is a novelty worth seeing. The shell is 30 inches long and 15 inches diameter. It is a vertical, tubular boiler with an internal fire-box, and the tubes are 10 inches long by 19 ths diameter. The shell, as well as the tubes, is made of steel, and it is in the employment of this material that Mr. Roper has been able to reduce the weight, and not only maintain but increase the evaporative efficiency of his boiler. The shell is 10th of an inch thick, while the tubes are only 10th. With this boiler steam has been raised in eight or ten minutes, and it is capable of bearing a pressure of 90 pounds per square inch with entire safety. It supplies all the steam necessary for the two cylinders, and propels the carriage eight or nine miles an hour without any difficulty.

In this machine we have one of the most novel steam boilers ever made. And it is a matter for earnest consideration whether, in the employment of cast steel for steam boilers, we may not only greatly increase the strength and reduce the weight, but also add to the economy of the apparatus, by facilitating the transmission of heat. To use a homely illustration, a thin tea kettle boils more quickly than a thick one; and, for the same reason, steam bollers with unnecessarily heavy flues, flue sheets, fire-box walls and furnace crowns, transmit less heat than lighter ones. The only danger to be apprehended in departing from the established time-honored rules and precedents in this case, is in weakening the structure. An example of what a thin iron flue is capable of sustaining, was shown in Lee & Larned's steam fire-engine Niagara. This steamer had a large vertical boiler, the tubes in which were but 36th of an It was with much regret that we found the American

four feet long. We have repeatedly seen 240 pounds to the square inch on this boiler, or others with tubes no larger or thicker. Some of the tubes were occasionally collapsed so flat, however, that neither steam nor water could pass through them. These were drawn iron tubes; but if steel had been employed they would not have failed, because the latter metal has a higher tensile strength.

Another lesson on the value of good workmanship is given by Roper's boiler. To bear the pressure required of them, the tubes must necessarily be small in diameter. They were, therefore, all drilled and turned, and were thus homogeneous throughout. Such a method of making a steam boiler is, of course, expensive; but if the evaporative efficiency is increased thereby, as it is, it is only a question of first cost, for the money returns in the future by the fuel saved.

The rapidity with which heat is transferred from one substance to another is directly in proportion to the difference of temperature between them.

The conducting power of steel is lower than that of iron; the former being, according to experiment made by Weideman and Franz, 224; while steel is but 218. But this difference is so small as to be of no moment, and is wholly nullified when the tensional strength of the two metals is considered; for, by taking advantage of the superior virtue of steel we can make a structure much lighter of it, for a given strength. Moreover, in a cast-steel boiler, the rapidity with which heat would be transmitted through the thin walls would be less likely to burn the exposed parts-the tube, sheet and fire-box crown-than in

the comparatively slow action of thick iron plates.

Very many persons confound strength with weight, and suppose that, because a number of pounds of material are added to a certain part, a correspond-ing increase of strength is obtained, Nowhere do we find this more prominently illustrated than in steam boilers; too often the essential points of safety are neglected, while those which bear no strain are heavy in the extreme.

It is, therefore, with a view to promote the efficiency of steam apparatus and economy in its use that we suggest further experiments in this direction. Cast steel of fine texture, well riveted and annealed very low, would seem, from the experiment of Roper, capable of sustaining great pressure. We doubt if a boiler 30×15 inches was ever made which furnished so much steam, or was capable of evaporating so much water in proportion to its size, as this one. If, by a corresponding increase in the thickness of the plates and the external dimensions, boilers can be built of proportionate strength, a great economy of space would result in sea-going ships.

THE ART OF ADVERTISING.

The art of advertising consists chiefly in putting business before the world in such a manner that it will be novel and attractive. This seems a truism. but there are very few persons, who are capable of understanding it. The large fortunes accumulated by individuals in a few months for the sale of simple articles to be found on every corner, prove there is some virtue in advertising, for these same people have covered dead walls, pavements, and every spot, remote or near, that the eye of man would be likely to fall on, with announcements of their glue, etc.

We have recently received through the politeness of a large manufacturing concern in England forty illustrated catalogues of different firms in Great Britain who are engaged in the manufacture of agricultural implements and other machinery, from a round pig's trough to a huge steam plow. These catalogues, collected for us at considerable trouble, are valuable additions to our library, and we intend to have them bound for reference. In looking over them we have been much impressed with the great variety and the ingenuity of the tools and machinery adapted to the agriculture of Great Britain. Several of the firms manufacture steam-cultivating machinery, and devote considerable attention to a discussion of its economic advantages.

On receipt of the catalogues mentioned we immediately wrote to all the parties here we could think of, requesting them to send us their trade circulars, which, on coming to hand, were carefully examined. inch in thickness and 12 inches diameter, by some catalogues were far inferior in point of mechanical a steam carriage for common roads.

execution to those received from abroad. The English trade circulars are printed on clear white paper, with new type, excellent cuts-mostly wood, but often steel and lithographs-and they appear to so much better advantage than our own that we confess we blushed for our business men.

Eyes are precious, and it is more than a catalogue is worth to pore over it and scrutinize a cut with a magnifying glass in order to make out what it means.

Besides this, some of our trade circulars are of little value, or considered so by the publishers of them, for when one asks what a certain machine in one of them is, he is often told, "Oh, we don't build them like that now." Of what use is it to publish a cut of it, then?

We recently saw a work of art in the shape of a trade circular, issued by some French drug house, The book was a large octavo, and was certainly fit for any center table. The drugs were shown in their cases; the effect of the glass was beautifully given; the crystals were clearly shown; the powders were properly represented, and the natural colors of the several articles were all given with such accuracy and artistic effect that a chemist would have recognized any kind at a glance. A work of this description is a study, and costs immensely, but who shall say that it does not pay? The gentlemen of the firm where we examined the circular told us they were frequently ordering quantities of goods suggested by an examination of its pages.

Some of our lithographed cards of tobacco, of hair oils, of stove polish, and similar things, are exceedingly beautiful, as are also the cards of our large shipping houses, announcing the sailing of vessels. Bankers frequently issue cards of the finest bristol board, whereon their business is displayed in gold and colors. It is not from a lack of taste among us that we have such poor trade circulars in general, but rather from a want of appreciation of the advantages likely to spring from them. A good circular attracts every one, while a poor one is sure to repulse the most determined purchaser.

We shall be pleased to receive duplicates of all the trade catalogues which contain illustrations. We are frequently importuned to say where such and such a machine can be had, and the catalogue will prove useful to us for reference.

INDISPENSABLE TOOLS.

We always take pleasure in calling the attention of our readers to any improvement in machines or tools which are useful and necessary to economize time and labor. We have lately seen a scroll chuck, manufactured by Mr. A. F. Cushman, of Hartford, Conn., which is a most valuable tool. By the aid of it any piece of work can be held true in the center by simply screwing up one disk. This chuck has been used for a long time through the country, and it is not as a novelty, but as a standard article, that we call attention to it.

By an ingenious modification of the same principle, Mr. Cushman has constructed a neat little drill chuck, which has capacity for a wide range, from $\frac{3}{4}$ ths to $\frac{1}{32}$ d of an inch, and yet is compact and handsomely finished. We trust these goods will be widely adopted by mechanics, for they are all they are represented to be.

Examiner-in-Chief.

It is reported that Hon. Elisha Foote, of Saratoga, N. Y., has been appointed by the President an Examiner-in-Chief in the Patent Office, in place of Mr. Coombs, resigned. We have known Judge Foote for many years, and can speak in unqualified terms of his character and qualifications. For many years he has been employed as senior counsel for Burden, of Troy, in his famous spike suit against Corning, Winslow

AFTER two years of labor on the new defensive works near old Fort Hale, New Haven harbor, water has been let into the most. The water gates are constructed in the solid rock, through which a distance of twenty feet has been blasted for the admission of the water.

W. C. Dodge, Esq., of Washington, D. C., wishes to correspond with parties who are prepared to make



ISSUED FROM THE UNITED STATES PATENT-OFFICE

FOR THE WEEK ENDING AUGUST 1, 1865. ted Officially for the S.

Pamphlets containing the Patent Laws and full particulars of the mode of applying for Letters Patent, specifying size of model required and much other in formation useful to inventors, may be had gratis by addressing MUNN & CO., Publishers of the Scientific AMERICAN, New York.

49,061. - Shoe Fastening. - John Adams, Kokomo, Ind.:

place of buckle, eyelets, faces, etc., on succe and narriess.

Egg Boiler.—Frederick Ashley, New York City:
as a new article of manufacture an egg boiler having a
milicating glass, arranged and operating substantially as

[This invention relates to a novel and very useful egg boiler, by this invention relates to a mover and very destantege country by plainly indicated, the advantages of which are obvious.

Steam Pump. J. B. Atwater, Chicago, Ill.: the combination and arrangement of the chambers, d. pipes, D E G, and cocks, g g', constructed and opera-ially as described.

substantially as described.

49,064.—Lamp.—Lewis J. Atwood, Waterbury, Conn.:
In a 'amp burner with the entiminey holder projecting beyond the
perforated burner shell, I claim unditing the chimney holder to the
shell by a hinge whose center is at or near the edge of the shell, so
that the side of said shell shall form a stop to the chimney holder
when the chimney is turned back, as specified.

49,065. -Oil Well Drill. -Elias Baker, Pittsburgh, Pa.:

delaim. First. A drill for boring oil or other deep wells constructed a plurality of flat to boring oil or other deep wells constructed a plurality of flat of the state of th

he stocks, B B', of the drill, substantially as above described.

9,066.—Paint Composition.—James Ball and John
Parker Ford, Zanesville, Ohio:
We claim the addition of lithways, red lead, borax and sigar of each to coal part, thereby giving body and drying qualities to the omposition, and making a durable covering to a roof or other wood royk to which it may be applied.

67.—Sheep Chair.—Orlando Barker and George E. Blakelee, Huntington, Ohio: claim the above described sheep chair, constructed as and for urposes herein set for it.

he purposes herein set for h.

9,068.—Safety Vulve for Steam Generators.—S. G.
Barker, Dummore, Pa.:
I claim, First. The application of two or more valves, b b, in commination with one and the same lever, E. and with a spring or weight,
ubstantially as and for the purpose set forth.
Second, The adjustable fulcrum, F. in combination with the lever,
S, vulves, b b', and spring or weight, constructed and operating
ubstantially as and for the purpose described.

substantially as and for the purpose described.

49,069.—Manufacture of Paper Stock.—Henry Betts,
Norwalk, Coun.:

I claim the application of the fibers of the stalks and also of the
roots of the plant known as sedge to the manufacture of paper,
whether the same be used separately or in combination with other
ingredients, substantially as herein set forth. 49,070.—Rotary Engine. - Dana Bickford, Boston, Mass. I claim the combination of the brace, g, and its receiving and opping passage, h, with each piston, D, arranged in and so as to perate with a cylinder, B, cam, C, and a case, A, substantially as

laim the combination and arrangement of the passage, i, in or side plate of the case, A. with the cylinder, B, and its D D, arranged within the said case, as and for the purpose

specified.
I also claim the arrangement of the annular packing recest the fread or plate, b, and with respect to the cylinder, B, as sp 49,071.—Animal Poke.—Abner W. Bishop, York, Ohio: Felain the application of the spring, E, to upper side of lever, which, by reason or the combustion of the yoke, d, and belts, D and C, and lever B, the pins, F F, protude and withdraw, as the nature of the case requires.

49,072.—Mucilage and Marking Brush.—Edward H.
Boswell, Philadelphia, Pa.:
I claim a rubber or other elastic band applied to the brush and
cover of a mucilage, marking or other bottle, for the purposes herein
specified.

This invention consists in the use of an elastic band applied to the tions divention commons in the use or an ensure sand applied to the stem of the brush and to the cover of a muciliage, marking or other bottle, for the purpose of always keeping the brush elevated above the contents of the bottle, except when forced down for the purpose of taking up some of the fluid for use.]

49,073 .- Conical Turning Gage .- Milton Bowker, Fitch-

Durg, Mass.:

I defining combination composed of the self-adjusting bar, D, the pinion and arbor. C, the friction roller, G, the scrol spring, F, the check pin, H, the hand, E, and the dial plate, B, the whole being arranged substantially in the manner and for the purpose herein described and set forth.

-Helices for Magnets.-Leverett Bradley, New

rk City; a helix composed of two or more connected spires or tiers erred wire, with sufficient space between the several turns of to pericelly separate them from each other, and with the tiers or wires forming the helix also separated (except at by the interpolation of some non-conductor of electricity.

Cultivator. James Brewer, Albany, Ill.: I caim the combination of the corn guards, K, the stirrups swiveling standards, S, with the frame, when arranged and

49,073.

First, I caim the combination and the swiv-ling standards, S, with the frame, when arranged and the swiv-ling standards, S, with the frame, when arranged seasoned. Second, The combination of the swive-ling front plows and the Second, The combination of the plow collars, the drag chains, the lift-ing stranged and operating as described.

Third, The combination of the plow sandards and frame with the adjusting bracket, O, and swiveling or crank hinge, P, when condusting bracket, O, and swiveling or crank hinge, P, when condusting bracket, O, and swiveling or crank hinge, P, when condusting bracket, O, and swiveling or crank hinge, P, when condusting bracket, O, and swiveling or crank hinge, P, when condusting bracket, O, and swiveling or crank hinge, P, when condusting bracket, O, and swiveling or crank hinge, P, when con-

varying the angle of the plow to the farrow, while allowing the plows both vertical and lateral play, as set forth. Fourth. The combination of the triangular forms, the combination of il and lateral play, as set forth.

be combination of the triangular frame, the adjustable, the lifting lever, the outer plows, the adjustable inner idleds, the stirrups and the hiting calins, when arranged go substantially in the manner and for the purpose de

Shoe .- David Brown and Wm. S. Wooton, Ko-49,076.

Note, Ind.: Note,—David Brown and Whit. S. Wooden, I Komo, Ind.: We claim the combination of the slit, f. at the back of the ble double wings or gores, I, attached at the respective sides of aid sit, and the flap, o, attached at the top of the counter, and utter edges of the gores, I, passing completel around the boot and fastening above the instep in front, all as herein represent described.

shoes, which enables them to be put on and taken off of the feet with great facility and eare, while, at the same time, there are no spertures in the upper through which moisture can reach the feet.

49,077.—Reaping Machine.—J. O. Brown, A. Ingham and F. L. Lomont, Massillon, Ohio:
We claim, First, The link, b. and standard, F. in combination with the strip, a, and platform, H, hinged together, substantially as and for the purpose set forth.
Second, We claim the arms, ce't, pivoted or hinged to the shoes, in combination, with the platform, H, substantially as and for the pur-

49,078.—Fare Box.—A. H. Bugher, Cincinnati, Ohio: checking and registering device, composed ongue, N, and bell, O, when arranged and cribed.

49,079.—Fare Box.—A. H. Bugher, Cincinnati, Ohio: I claim providing the back of check boxes with a concavity, E, and for the purpose horsin at fourth.

and for the purpose herein set forth.

49,080 — Faire Box. — A. H. Bugher, Cincinnati, Ohio:
I claim in locks a key-hole guard or scutcheon, J. p. ovided with a flaring stud or button, M. adapted to operate in connection with the currb, L. for the reception of a wax seal, arranged as herein set

S1. - Fetter for Animals. - M. F. Burlingame, Willett, N. Y.:

lett, N. Y.:

claim, in combination with the hinged ring, A, the cap, C, and spring, the whole constructed and operated substantially as and the purposes set forth.

There Poston Mass.:

49,082.—Car Brake.—Wm. L. Burt, Boston, Mass.:

I claim the combination and arrangement of the rods, G H, with
the brake heads, the lever, b', and the windless mechanisms for operating such leve.

erating such leve.

screws and nuis, b c, with the lever, F, and the rods, G H, applied to
the brake heads, as specified.

screws and nuts, bc, with the lever, F, and the rods, G H, applied to the brake heads, as specified.

49,083.—Horse Hay Fork.—J, R. Cadwell, Dexter, Mich.: First, Constructing the fork with a head, A, and tines, a, and with an upper grasping tine or times, C, aubstantially as and for the purpose set forth.

A and tines, a to serve the two-fold purpose of a handle and tine, C C: from a pivot on the inner or front side of the head, A, of a fork, substantially in the manner and for the purpose described.

Fourth, The combination of the tines, a, head, A, pivot. e. combined handle and tine, C C, formed substantially in the manner and for the purpose described.

Fourth, The combination of the tines, a, head, A, pivot. e. combined handle and tine, C C, and pivot dioop, D, substantially in the manner and for the purpose described.

Fourth, The combination with a fork, C, formed substantially as set forth.

Systh, The combination with a fork, constructed with a head. A, and tines, a, of one or more upper grasping tines, C, and a locking and tripoing device, substantially as and for the purpose set forth.

Seventh. So constructing or applying one or more grasping times or teeth to a fork that the ends of said grasping teeth swing down below and in front of the tines, a, on the fork, and thus serve the voloid purpose of condining the hay upon the itnes, a, and of a guard for protecting the times. a, substantially as set forth.

49,084.—Hand Stamp.—Dexter H. Chamberlain, Rox-

9,084.—Halid Stamp.—Locate bury, Mass.:
I claim supporting the arm, C, which carries the type block, in not manner as to allow of its adjustment, subst nitality as and for nepurpose set forth.
I also claim supporting the type block by a pin, t, passing into projecting from it, substantially as described.
I also claim the slotted bearings, it, through which the inking ribon, e, is slipped upon the rods, d, substantially in the manner and or the purpose set forth.

Chan Chevallier. Brooklyn, N. Y.:

for the purpose set forth.

49,085.—Door Bolt.—Chas. Chevallier, Brooklyn, N. Y.:
I claim a bolt, the shank of which 'orms a toothed rack, and which
operates in combination with a folding lever, C, spring catch, D, and
button, E, substantially as and for the purpose set forth.

[This invention consists in a bolt provided with a toothed rack,

ich gears in a toothed segment at the end of a folding lever. nbination with a spring catch, in such a manner that when the th is pushed out the folding lever lays flush with the front plate of the case which contains the bolt, and is locked by a spring catch. thereby keeping the balt firmly in position, and preventin: it from dropping down spontaneously, or from being pushed down or raised by unauthorized persons; and when it is desired to withdraw the bolt from its socket the spring catch can be made to release the pulley lever by pressing a button in the front plate, and said fold lever forms a convenient handle, by which the bolt can be w drawn from its socket with considerable force.]

49,086.—Railroad Car Spring.—Wm. F. Converse, Harriso, Ohio:
son, Ohio:
I claim the collet, G. in the described combination, with a rally clamped disc spring.

trally clamped disc spring.

49,087.—Gang Plow.—C. W. Corr, Carlinville, Ill.:
I claim the crank axies, C, provided with the hole, or its equivalent, as shown and described.
Second, I claim receiving the plows by means of the clip, b, and brace, f, substantially as shown and described.
Third, I claim the combination of the plow standards, a, stirrups, d, and lever, N, all arranged to operate as and for the purpose set forth.

of an ever, A. a transport oversace as and for the purpose set forth. It claim attaching the independent crank axis, C, one bove and one below the main frame, as shown and described. Bith I claim the stirrup or guide, in combination with the bolt p, and stud, p', for the purpose of adjusting the tongue laterally, and, at the same time permit in have a vertical movement, as and for the purpose set forth. Sixth, I c aim the foot lever, W, arranged to operate in connection with the tongue and main frame, with its front end working in the stotted both, X, as and for the purpose set forth. Seventh, I also claim the slotted both, X', in combination with the slotted wedge, x, for the purpose of adjusting the parts, as shown and described.

49,088.—Cider Mill.—J. A. Crever and F. H. Kerney, Cincinnati, Ohio:

Cincilliati, Onlo; we claim the employment in a crushing and expressing; we claim the employment in a crushing and expressing; ylindrical concave, D, revolving in partial contact, with a nd interior cylinder or roller, F, in the manner and for thubstantially as set torth.

-Lamp Chimney. -Wm. H. Culp, Hammonds

9,089.—Lamp Chimney.—Wm. H. Culp, Hammonds-ville, Ohio:

First, I claim the glass shade, A, metallic chimney. B, metallic interpretation as described a constructed, arranged and second, The metallic rim, C, constructed, arranged and operating ubstantially as described.

substantially as described.

49,090.—Carriage Jack.—G. L. Cummings, New York City. Antedated July 26, 1865:

Fifst, I claim the combination of the frame, A B, elbow lever, D, friction roller, e, and sliding bar, C, all constructed, arranged and employed in the particular manner herein described, so that the

short arm of the lever can be thrown into or beyond a vertical pction, and thus sustain the weight without fastening the hand leven Second, The combination of the adjustable rest, E, and vertication or gailde, C, when constructed and arranged to operate herein specified.

herein specified.

49,091.—Shuttle Driver for Sewing Machine.—Volney Cutter, Cincinnati, Ohio:
I claim the spring, d, and its central bearing pin, in combination with the pivota, c, horne or tappets, a a, and pins, c e, as described, and for the purpose explained.

This invention consists in the employment or use of yielding horns or tappets in shuttle drivers of sewing machines, in such a manner that the shuttle, instead of striking against a solid body at either end of its stroke, comes in contact with said yielding horns or tappets, and injury to the shuttle driver is avoided.

49,092.—Shuttle for Sewing Machine, Etc.—Volney Cut-ter, Cheinnati, Ohlo:
I claim the combination and arrangement of the spiral springs with the bearings of the bobbin journal, for the purpose of producing the requisite friction, to prevent the thread from being paid out faster than it is needed, as specified.

[This invention consists in providing spring bearings for both jour als of the bobbin of a shuttle, and it is designed chiefly for use in

49,093.—Ink Stand.—Samuel Darling, Bangor Maine: I claim the combination of the concave socket, a, and the friction spring, C, with the ink fountain. A, and its stand. B, such ink fountain heling capable of being revolved within the said socket, as and for the purpose hereinbefore explained.

I also claim the combination of the niche, f, the fountain, A, the stand. B, and the spring, C, whereby the spring is made to answer the two-fold purpose of a cover to the ink and a means of holding in fountain in its seat, under circumstances as above specified, c, or their mechanical equivalents, with the pressure spring, C, and the fountain. A, so and the studies, and the fountain. A, so apply as specified.

I also claim the arrangement of the ventilating stopper, k, and the work hole, i, for its reception with the ink, f, and the fountain, A, the whole being substantially as set forth.

49,094.—Vise.—H. B. Dart, Westfield, Mass.:
I claim a vise, provided with the usual parallel jaws, and with the oblique-faced or V-recessed jaws, combined and arranged substantially as set forth. 49,093.—Ink Stand.—Samuel Darling, Bangor Maine:

tially as set forth.

[This invention consists in combining with an ordinary vise, having parallel Jaws, for grasping plane surfaces, a pair of jaws, having faces provided with V-shaped recesses or notches to grasp cylindrical

icles, such as tubing, rods, etc., by which two implements a ned in one and the valve of the ordinary wise greatly augm

19,095.—Reciprocating Propeller.—Moses Depuy, Pitts-burgh, Pa.: I claim the employment and use of a swinging propeller, attached o and operating directly on a line, or nearly so, with the piston of the engine, without the intervention of a crank, combined with a substantial of the postude of a crank of the postude of a used, when constructed, arranged and operating substantially in the manner and for the purpose herein set forth.

the manner and for the purpose herein set forth.

49,096.—Harness Motion for Power Loom.—C. Duck-worth, Mount Carmel, Conn.:

First, I claim the employment of a loose cross arm, o', upon the rock shaft, c', in combination with the knives, a a, and fixed cross arm, c, substantially as described.

Second, The double-acting pitman rods, F.F., the former being connected to the rock shaft, cd, and the latter being connected to the loose arm, c', substantially as described.

Third, The slotted adjustable guide, a3, in combination with the projection, a2, on the knife, a', substantially as described.

Fourth, The specified construction, arrangement and combination of the closers, b'b', and knivas, aa', when the latter are operated as described, for the purpose set forth.

of the customer described, for the purpose see an experience of the customer described, for the purpose see an experience of the customer described.

City:

First, I claim the arrangement and construction of the cistern pump chamber and ram cylinder, in the manner herein described second, I claim the relative arrangement of the pump chamber estern, and upper aperture of the cistern, whereby the pump chamber although situated within the cistern and made in one plece with it, may nevertheless be bored out and have its plunger applied and removed as set forth. Third, I claim the combination and arrangement of the rod with the pump of the rod with the pump of the rod within the plunger for tripping the valve, substantially as described.

Fourth, I claim the arrangement of the pump cylinder within the cistern described, and between two apertures closed by bonnets as described, and between two apertures closed by bonnets and secretibed, are not applied and removed from the upper side of the cistern, as set torth.

Leans Refrigerator or House for Preserving Animal Chambers,—J. Hyde Fisher, Chimbers and the contract of the cistern of the cistern of the cistern.

49,098.—Refrigerator or House for Preserving Animal and Vegetable Substances.—J. Hyde Fisher, Chi-cago, Ill.:

cago, Ill.:

cago, Ill.:

capacago, as, at the sides of the flooring, D, between the upper and lower compartments, BC, of the house in combination with the apross, HL, flue, E, and ventilator, G, all arranged subside strips, as and a spout, E, for the purpose specified.

9,099.—Diagrams for Testing the Value of Mutilated Currency Notes.—Leander Fox, New York City: I claim the transparent diagrams lined and spaced as herein de-cribed, and for the purposes set for th.

Lock for Plano .- E. I. Gaylord, Terryville,

Conn.:

I claim the two segment bolts arranged so as to work from a common center and operated through the medium of the tumbler connected with them, substantially in the manner as and for the purpose herem set forth.

pose herem set forth.

49.101.—Lock.—Charles T. Gibson, Baltimore, Md.:
I claim, First, A lock which is provided with a movable scaling leading, and the first of the case thereof, substantially as described.

Seconds of winging bar, C, in combination with a tongue, S, and the construction, E2 of the lock case substantially as described.

Third Construction the laterally swinging bar, C, with a tongue, d', on its free end. In combination with a spring bott, c, substantially as described.

Fourth, Analysing the tongue, S, which receives the hage, D, to the Fourth. Analysing the tongue, S, which receives the hage, D, to the

on its free end, in combination with a spring bolt, e, substan-ally as described.

Fourth, Applying the tongue, S, which receives the hasp, D, to the tension, B2, of the lock frame, in combination with a bar, C, and tch or bolt, e, substantially as described.

latch or bolt, e, substantially as described.

49,102.—Feathering Paddle Wheel.—Albert Gilman, Charlestown, Mass.:

I claim the stationary ring guide or track, c.e, fastened to the side of the vessel for the purposes set forth, substantially as described. In combination with the rocking or rotating paddles, provided with arms, a, rigidly fastened to the paddle axies, b, I claim the fixed or stationary ring guide or track, c.e. in which the bins or pivots of the arms travel to govern the position of the paddles.

49,103.—Stirrup.—John S. Gould, Allegheny, Pa.:

I claim the combination of the roller, A, with the joints, B, constructed, arranged and operating substantially as herein described, and for the purpose set forth.

and for the purpose set forth.

49,104.—Cotton Chopper, Cultivator, and Drill.—Joel A.

Hall, Keokuk, Iowa:
I claim, First, In connection with a frame, A, the adjustable handles, B C, arranged and operated as above described and for the purpose set forth.

Second, The clamp frame, f, hoe, g, and adjustine segment, g, combined as above described.

Third, The combination of the plow-share, or point, v, guide blade, w, and pivoted wings, x x', substantially as and for the purpose set forth.

Fourth, The plow-share, v, cutting blades, x and x x', adjusting red, y' and y', arranged as above described and for the purpose set forth.

Fifth, The arrangement of the hopper, r, distributing spout, S, out the cultivator, in the manner and for the purpose described.

with the cultivator, in the manner and for the purpose described.

49,105.—Brick Mold.—James A. Hamer, Reading, and Thomas Lippincott, Philadelphia, Pa.:

I claim the combination and arrangement of the levers JJ, and the rods, H H and I I, with the side pieces, B B, and end pieces, C, of the combined mold for the spransion and contraction of the said pieces, B B, and partitions, D D and D'D', substantially in the manner and for the purposes above set forth.

Second, Combining the rods, K, with the end pieces, C, and side pieces, B for opening and closing the said end pieces, substantially as described and for the purpose specified.

Third, The combination of the lock strips, M, with the side pieces, B, and partitions, D D, substantially in the manner and for the purpose above described.

Fourth, The combination of the levers, JJ, with the lock strips, M, by means of the came, n, sliding pieces, O P, and bell cranks, a, substantially as described and for the purpose specified.

49,106.—Process for Disintegrating Vegetable Fibers.—
Charles Heaton, New York City:
I claim the process herein described of treating vegetable fiber by subjecting it for a short time to a high degree of heat without the presence of alkali, and afterward immersing it in an alkaline solution at a lower temperature.

(The object of this invention is to separate gummy, silicious and other surrounding matter from vegetable fiber in a simple and ex-peditious way, part of the means used for this purpose being me-chanical and part chemical, in conjunction with heat.)

49,107.—Railway Chair.—John L. Hills, New York City.
Antedated July 21, 1865:
I claim, in combination with the wrought iron chairs, C a b, the brace bar. E, extending from chair to chair, and held in notches between the abutting ends of the rails, as herein shown and de-

scribed.

49,108.—Tempering Steel Springs.—William Hughes,
Bloomington, ill.:
First, I claim the within described process of hardening cast-steel
springs, by first coating them with soap, or its equivalent, before
heating, and cooling them off, as before described.
Second, The hydrated pedified, for the purpose of hardening springs
of other cast or spring steel.

of either cast of spring secent 49,109.—Wood-bending Machine.—Philip Hurm, Hamil-ton, Ohio: 1 claim the former, A, stirrups, E, key, F, shear bars, D I, boit, J, pins. 6, and wedges, O, a ranged and operating together substan-tially as described.

tiany as described.

49,110.—Trace Trimmer.—William L. Hutchinson, Burlington, Iowa:

1 claim a device for trimming traces and other straps, constructed and operating substantially as herein shown and described.

and operating substantially as herein shown and described.

[The object of this improvement is to facilitate the trimming or dressing of leather traces; and other straps, and for harness and other purposes. The invention consists in the combination of two springs—namely, a lateral and a vertical self-adjusting spring—with an adjustable cutter or knife, the construction being such that on simply drawing the trace or strap between the springs it will be very smoothly and rapidly trimmed upon its edges.]

49,111.—Cultivator.—Hanford Ingraham, Naples, N. Y. the transverse beams, A and B, and center forward beam, ection with the knee braces, C, as constructed and arbstantially in the manner and for the purpose set forth.

49,112.—Light Wagon.—H. L. Isham, Plattsburg, N. Y.:
First, I claim the securing of the ends of the leaves, a, of the
springs to the bolster and axle, in the manner substantially as herein

set forth.

Second, In combination with the leaves, a, secured as hereinbefore specified, I further claim the safety straps, G, attached to the bolister by dovetail plates, d', and grooves, c', in the manner de-

scribed.

49,113.—Padlock,—H. Jackson, New York City:
I claim the sliding frame, C, provided with the bolt, D, and lever,
E, with the spring, F, bearing against the latter, the lever being
notched at its upper edge to catch against the projection, e, at the
upper part of the case, substantially as and for the purpose set forth
I turther claim the pivoted catch, G, connected with the frame, C,
as shown, to operate simultaneously therewith, for the purpose
specified.

49,114.—Water Wheel.—Andrew Jamison, Taylorstown

Pa.;
I claim constructing the buckets of an overshot water wheel in two parts, F P, the former, F, being so arranged as to contain or hold the water so that it can act upon the wheel by gravity, while the laster, F, are provided with openings, c, and so arranged as to admit of the water acting upon or against them by impact, and then allowing it to pass into the inner parts, F, of the buckets below, substantially as described.

This invention relates to a new and useful improver shot water wheels, and it consists in constructing the buckets in such a manner that they will receive the force of the water, and the wheel be driven by the impact as well as by the gravity of the water.]

49,115.—Blacking-box Holder.—Charles E. L. Jelliffe, Williamsburgh, N. Y.: I claim a blacking box having a handle or holder attached thereto, substantially in the manner described and for the purpose aspecified.

[This invention relates to a novel and very useful device for a holder for boot-blacking boxes, the object of which is to prevent the hands from becoming solled when the blacking is used.]

49,116,-Valve Cock.-Nathaniel Jenkins, Boston, Mass. I claim the employment of an adjustable stop or regulator. Note equivalent, in combination with the follower of a valve cock, stantially as set forth and for the purpose set forth.

stantially as set forth and for the purpose set forth.

49.117.—Grain Drill.—David J. Jones, Sadsbury, Pa.:
First, I claim the slides, M, with their openings, yy, adjustable
plates, N, combined with the hoppers, I, and operated substantially
as and for the purpose specified.
Second, The crank axie, E', levers, P, slides, M, combined and
operating substantially as described.
Intrd, The levers, F, with the pins, m, and the slides, M, with the
notches, X, constructed and operating in combination with the
levers, K, substantially as and for the purpose set forth.
Fourth, The drums, I, with their cords, b and d, operating in
combination with the drill feet, G, and beveling plates, J, substantially as spicified.

Communator was a second of the second of the

49,118.-Boot and Shoe.-Isaiah T. Jones, Sandwich,

Mass.:

I claim beveling under the inner surface of the part, B, so as to aid in retai.ing the filling, D, and to allow the pega or equivalent fastenings, E, to be placed very near the edge, in comb.nation with the thin lugs or parts, B', extending inward from B, under the filling piece, D, substantially as and for the purpose herein set forth.

piece, D, substantially as and for the purpose herein set forth.

49,119.—Machine for Making Paper Board.—John F.

Jones, kochester, N. Y.:

First, I claim the combination of an open wire mesh or perforate
cylinder, B, wire apron. E, and pressure rollers, D D, for forming
paper board in a continuous or indefinite length, substantially as
set forth.

paper board in a continuous or incumine to the suc-set forth.

Second, In paper-making machines, the combination of the suc-tion box or boxes composed of the rollers, I I and K, operating sub-stantially in the manner and for the purpose herein set forth tantially in the manner and for the purpose herein set forth

-Sofa Bedstead.-Francis Keller, New York

City:
I claim the combination of the back, C, seat. a, flaps, E, hooks, hinges, C bf, when constructed and arranged as and for the purpose berein specified.

E[This invention relates to an improved sofa bedstead, and it co sists in a peculiar construction of the same, or in an improved of its parts, whereby a better bed is obtained than devices, and a more convenient and desirable article

49,121.-Corn Planter.-Philip H. Kimball, Prophets

19,121.—Corn Pianter.—Philip H. Kimball, Prophetstown, Ill.:

First, I claim the peculiarly shaped runners or shoes. L. L. contructed and arranged specifically as described, for opening a furrow
ind covering the seed therein, substantially as L. L. of my machine
ind covering the seed therein, substantially as L. L. of my machine
with the weighted levers, N. K. connected to the framework thereof,
is that each runner and coverer may, under an adjustable degree
of pressure, act and operate independently of the other, substanially in the manner and for the purpose herein set forth.

I claim, in combination with the seed slide, N, of my improved
orn planter, the pinions, h, operating against the edge thereof,
ubstantially as and for the purpose herein set forth.

Fourth, I claim, in combination with the pivoted roller scrapers,
A, and the platform and driver's seat of my improved corn-planting
and scrapers, substantially in the manner herein set forth.

1, 122.—Machine for Roundling and Polishing Balls,—

aid scrapers, substantially in the manner herein set forth.

19,122.—Machine for Rounding and Pollishing Balls,—
John Loper Knowlton, Philadelphia, Pa.:

First, I claim the method herein described of imparting to the sail while being ground or turned, an intermittent rotary motion in we or more directions by means of four (more or less) longitudinally iding totary mandrils. D D', radisting from a common center and provided with chucks at their inner ends, or any other equivalent means, constructed and operating substantially as and for the purpose set forth

Second, The combination of four (more or less) chucks, E E, nade to grasp the work at stated intervals with a grinding wheel or liber tool, applied and operating substantially as and for the purpose set forth

The J. The combination of the segmental rack, C, pinion, d, shaft,

in the root, applied and operating substantially as and to the proper scribed.

The combination of the segmental rack, C, pinion, d, shark, et al., and weighted lever, f g, arranged and operating in connection with the pivoted frame, G, and polishing wheel, F, in the manner described, to regulate the pressure of the said wheel against the ball to be polished.

Fourth, The cams, o, and toes, s t, in combination with the carriages, C C, chucks, E E, and weighted levers, \$0 ts, or their equivalent, constructed and operating substantially as and for the purpose described.

23.—Drill for Well Boring.—O. B. Latham, Seneca Falls, N. Y.: laum the adjustable reamer, C. in two sections, the screw, e, s. c, the key and gibs, in combination with the drill and shank, inged and operating conjointly, substantially as and for the pur-set forth.

pose set forth.

49,124.—Journal Box.—Henry A. Lee, Worcester,
Mass.:
I claim the application to journal boxes of the set screws, D,
within one of the shells or haires of which the journal box is composed, substantially in the manner and for the purposes specified.

49,125.—Steam Boiler.—David Lister, Carbondale, Pa.:
I claim a pipe, B, arranged near to the bottom or to that surface
of a steam boiler from which the sediment is to be removed and
perforated with a number of holes, a, in the manner and for the
purpose substantially as herein shown and described.

49,126.—Revolving Car.—Daniel Lott, Lottsville, Pa.:
I c aim the rolling r-ceptacle, A, mounted by a horizontal shaft, B, upon wheels, C, which run freely upon the said shaft, and drawn breasn of a frame in which the ends of the said shaft are journaled.

means of a frame in which the ends of the said shaft are journaled.
49,127.—Musical Instrument.—Thomas Loud, Philadel'
phia, Pa.:
I claim the use of a rail placed in front of the key board of a read
organ, melodeon or other musical instrument and connected with
the device or devices usually employed therein for covering the
chamber containing the reeds or other devices used for producing
musical sounds, arranged and operating substantially as herein described and for the purposes specified.

(This invention relates to the mode of opening and closing the (This invention relates) to be mode of peaning and cooling swells of melodeons, reed organs, etc., and consists in a simple and novel arrangement of parts whereby it can be accomplished while the feet are employed in working the bellows, and without removing the hands from the keys, the importance and advantage of which are self-evident to all performers on such instruments.]

49,128.—Screw Wrench.—Horace W. Love, Brooklyn, N. Y.: I claim a single diagonal adjustable screw wrench, constructed and capable of operating substantially as described.

and capable of operating substantially as described.

49,129.—Drill.—John M. May, Janesville, Wis.:
First, I claim bevelling the bit or cutting edge of a drill all on one side or chiefly on one side to give the drill a slightly rotating motion in a horizontal direction at each blow of the drill, substantially as described.

Second, A swivel formed of parts, E E and G, when used to allow a drill or a punch drill to revolve in the path of a horizontal direction, substantially as described.

Third, Using a spring guide to catch pieces of rock, and other substances that fail into a drilled well and obstruct the operation of a drill, substantially as and for the purposes described.

Fourth, Screw or strainer when used in a pump drill, substantially as and for the purposes described.

taily as and for in purposes described.

49,130.—Breech-loading Fire-arm.—Edward Maynard,
Washington, D. C.:
First, I claim the formation of an outlet, in or through the come
seat or recoil block of breech-loading fire-arms to permit the free
escape of gases leaking from the cartridge or gun barrel at the explosion of ... he charge therein, substantially in the manner herein

plosion of the charge therein, see that the set forth. Second, The use and combination of a central recoil rod, B, with a movable cone seat, A, and the loading aperture of a breech-loading gun, substantially in the manner and for the purpose herein set

49,131,—manufacture of Felted Fabrios.—Edwin D.
McCracken, New York City:
I claim the use of the fiber of cane or reed, in combination with
wool or fur, or with both wool and fur, in
goods, substantially as herein described.

49,132.—Surgeon's Operating Table.—Thomas McIlroy,
New York City:
First I claim the table hinged to and supported upon the frame,
A, and provided with a hinged portion, B', and hinged leg extensions, E F; each section, to wit: B B' E and E, being provided with
devices for vertical adjustment, substantially as described.
Second, I claim the latterally adjustable is g extension, by means
of the pivot joint, F, to support the leg in its laterally deflected position.

on. In combination with the table, B, I claim the hinged back support, J, with its device for vertical adjustment, substantially as de-

cribed.

49,133.—Machine for Cutting Screws.—John A. Merriman, Chicago, Ill.:

First, I claim closing dies by the use of the lateral sliding bearings, K, acting directly upon the dies by means of inclines, operating substantial of the sliding bearings, K, the levers, i, and the dies, g, all arranged and operating substantially as and for the purposes herein set forth.

Third, The latch or strap, p, in combination with the sliding bearings, K, and the dies, g, cubstantially as herein set forth.

19, 134.—Mode of Halsting and Lowering Wiled.

or the purpose set forth.

9, 34. — Mode of Hoisting and Lowering Window Sash.

—John M. Merryman and Kilby Ferguson, Indianapolis, Ind.:

First, in combination with the upper and lower moveable sash of
window, a c-rd winclass and pulleys, or equivalent devices, so
at the said sash may be raised or lowered at pleasure, and percity balanced, when the windlass is fixed within the window
sing.

said sash may be raised or lowered at pleasure, and perfectly balanced when the windlass is attached to the lower sash.
Third, In combination with a hoisting and lowering device appiled to one edge of a window sash, the friction roller, M. Applied
to diagonally opposite corners of said sash for the purpose set forth.
Fourth, In combination with the windlass, A., for rai-lips and
lowering window sash and the ratchet and pawl, B. R, the friction
brake, D, substantially as described.
Fifth. The lock, P, or its equivalent, in combination with the
ratchet and pawl of the windlass, A. for the purpose of facilitating
the working of the upper sash, and for locking the window with the
said upper sash at any desired point of elevation.
49,135.—Washing Machine.—John H. Monsees, Smith
City, Mo.
I claim the particular combination and arrangement berein de-

9,135.—Washing.

City, Mo.

I claim the particular combination and arrangement herein cribed, of the tub. A, oblique plunger, C, oscillating arms, B, porting bars, d, lever frame, D, inclined abutment, c', and goords, D' D'', as and for the purposes herein specified.

This invention relates to a new an improved clothes washing machine, of that class in which a swinging plunger is used, and the clothes subjected to a pressure or squeezing action. The object of the invention is to obtain a washing machine of the class specified, which will be simple in construction, and possess advantages over others of the same class, as hereinafter referred to.]

-Summer Stove.-Francis Morandi, Boston, 49,136.

49,136.—Summer Stove.—Francis Morandi, Bosto Mass.:
I claim, First, In portable summer stoves or furnaces, arrangi a perforated cover, K, upon the smoke pipe so as to enable one discharge the smoke into, and use the stove with a kitchen stove range, without requiring any change in the latter, substantially described.

described. Second, I also claim fixing a platform or heating surface. H, upon the horizontal part of the smoke pipe, substantially as and for the purpose described.

Third, I also claim the combination of a summer store or furnace, with a platform or heating surface, H, loo the pipe, substantially as a described. [The object of this invention is to provide a portable, convenient

and economical summer stove, for domestic and other uses. It consists in a fire chamber or furnace, which can be connected either with another stove, so as to discharge the products of comit into its flues, or else with a chimney or other flue; the fire chamber being provided with a boller hole, and the discharge pipe being made to support a hot air or combustion chamber whose top form a heating surface on which vossels may be set, as upon any heating surface.]

-Wm. Neubauer, Philadelphia, Pa.: -Car Spring. -49, 137.—Car Spring.—Wm. Neubauer, Philadelphia, Pa.; I claim constructing a spring when made of plates, or sheets of metal, with the resilient parts, on angles from the central position of the spring plates, which compose the combined spring, and decreasing the length of the said resilient parts of each plate, in order, from the outer plates, for the purpose of increasing the strength of the spring and imparting increased elasticity to the same, substantially as described.

I also claim varying the angles of the resilient parts of the spring in such a manner that there shall be spaces, by extending over the whole surface of the spring plates, between their points of contact, substantially as represented, for the purpose of giving increased elasticity to the spring, substantially as above described.

49,138.—Churn.—Abel Newbrough, Madisonville, Ky. I claim the rame, F, pulleys, P P', belt, D, the crank, R, and size A, and adjustment as shown at b, the several parts being construct and arranged in relation to the churn, C, as and for the purpe specified.

41,139.—Lathe for Turning Heads of Nails, Tacks, Etc.
—Wm. H. Nichols and Horatio H. Abbe, Chatham,

—Wm. H. Nichols and around the cap, J, attached to Conn.:
I claim, First, The employment or use of the cap, J, attached to rearm, K, arranged substantially as shown, in such relation with see mandrel, C, to admit of the bead ceing readily adjusted on the sandrel as set forth.
Second, The combination of the cap, J, milling tool, T, cutter, Q, and thimble, H, all arranged and combined with a mandrel, C, to orm a new and improved laths, for the purpose specified.

[This invention relates, first, to a new and improved means for chucking the heads to be turned and ornamented; second, to a milling tool for milling the head; third, to a cutter for turning the head, and fourth, to a thimble for discharging the finished head from the mandrel; all being constructed and arranged in such a manner that the device may be operated with the greatest facility by children equally as well as by adults.

49,140 .- Molding Crucible .- George Nimmo, Jersey

9.140.—Molding Crucibře.—George Nimmo, Jersey City, N. J.:

I claim, First, Manufacturing crucibles in a plaster mold, in the namer and for the purpose specified, second. I claim lever I, and rib. n. applied in the manner specified, so form the interior of a crucible c.ntained within a revolving old as set forth. combination of the revolving chuek, c., pluster and d. d. lever, I, and rib. n. as and for the purposes specified.

Fourth, I claim mountaing the lever, I, and rib. n, in the frame, g., the manner specified, in combination with the countempoise, k., ilerum. On n. stop, p. for determining the size of the insertion of crucible, as specified.

49,141.—Manufacture of Crucibles.—Geo. Nimmo, Jer sey City, N. J.:
I claim a cracible or pot of plumbago, with a lining or coating of clay, or clay and sand, or similar material, for the purposes and as specified.

specified.

49,142.—Pipe Coupling.—James Old, Pittsburgh, Pa.:

I claim the mode of connecting tubes, or pipes of wrought iron or other metal (when so thin as not to admit of cutting screw threads sufficiently coarse to be easily united, by means of the use of a screw coupling, the male and female parts of which are united to the opposite ends of the pipe or tubing, by a very fine screw in the pipe or tube and coupling, and sollered around the pipe or tube and coupling, substantially as hereinbefore described.

coupling, substantially as herelabefore described.

49,143.—Breeching Strap Fastening.—A. W. Olds, Green Oak, Mich.:

I claim securing the breeching straps to shafts of carriages by means of a hook in one end of which the strap is looped, in combination with a fixed pin or staple of the shaft on which the hook is hung, arrange together and operating substantially in the manner described and for the purpose specified.

I also claim in combination with the above, the use of a spring, substantially as and for the purpose specified.

49,144. Bottle Stopper. Robert T. Osgood, Orland, 19.144.—BOTTLE STOPPER.—Robert T. Osgood, Orland, Maine.

I claim a concave cap covering the whole upper portion of a common cork stopple with a pointed spiral wire attached to, and within he cavity of said can firmly, for the purpose of passing down into, out not through said cork, to aid in extracting it, and to prevent the reaking of the same, as are herein substantially not forch.

breaking of the same, as are herein substantially set forth.

49,145.—Stand for Ladies' Figure.—Joseph R. Palmenberg, NewYork City.

I claim the arrangement and construction of a stand for ladies' figures, and similar articles, made in parts in the manner described and for the purpose substantially as set forth.

49,146.—Preserving Wood, Etc.—George Palmer, Littlestown, Pa.:

I claim, First, The apparatus and mode of applying the same for heating the liner and outer surface of timber, surfaciently to open the porce of the wood, and extract the sap and gaseous matter, as herein described for the purposes specified.

Second, I claim opening the porce of timber, by applying heat, in the manner herein described, so that oily, resinous, or bituminous substances will penetrate the wood to its fullest capacity.

49,147.—Composition for Frames, Bottles, Eic.—John T. Peet, Cincinnati, Ohio:
I claim the use of asphaltum, or rosin, with any suitable powder, to the end and for the purposes substantially as set forth.

49.148. - Lubricator. - Theodore G. Pelton, Lyons, Iowa,

49,148.— Lubricator.—Theodore G. Pelton, Lyons, Iowa, and James Brewer, Albany, Ill.:

We claim, First, Making the valive stem for oil cups in two parts, when constructed, arranged, and operating substantially in the manner described. Second. In combination with the valive stem, constructed substantially as described, the spiral spring, L, and collar or pin. P, as and for the purpose set forth.

Third, In combination with the stem, constructed substantially as described, the grooves, m, as and for the purpose specified.

49,149.—Lock for Piano.—A. F. Pfelfer, Newark, N. J.: I claim a lock provided with a supplemental bolt, E, pivoted to a sliding bolt, B, and arranged to operate in connection therewith in the manner substantially as described.

[This invention relates to a new and improved lock for deaks, planes, chests, the cases of sewing machines, etc., and it consists in the employment or use of a bolt pivoted to a sliding bolt, and arranged in such a manner as to turn over and catch into the plate which is attached to the lid or cover of the article to which the lock is applied, and at the same time be capable of turning back so as to pass outfor the plate when the lock is unlocked.]

49,150.—Cotton Seed Planter,—Brown Platt, Pana, Ill.,

as to pass out of the plate when the lock is unlocked.]

49,150,—Cotton Seed Planter,—Brown Platt, Pana, Ill.,
and Norman Platt, St. Louis, Mo.:
We claim. First, The shaft, M, armed with the pins, W, or their
equivalent, revolving in the box, L, during the process of planting,
in combination with the belt, D, armed with the pins, x, or their
equivalent, and the roller, i, all acting for the purpose of stirring up
the mass of seed contained in the box. L, and preventing the same
From remaining or becoming a compact mass.
Second, We claim the one visuality pins, or their equivalent.
From a but of the claim the armed wheel, N, revolving immediately in
frost of the belt as it turns over the pulley, J, to pull the seed off
of it.

it. Fourth, We claim the roller, i, attached to the box in the upper rt of the orifice through which the belt passes through its front d, to prevent seed clogging at that point.

end, to prevent seed clogging at that point.

49,151.—Apparatus for Mashing, Boiling and Fermenting Grain.—E. F. Prentiss and R. A. Robertson, Philadelphia, Pa.:

We claim, First. The combination of the perforated malt supply pipe, a the surrounding casing \$\frac{1}{2}\$ b, and the double-rotating mixer, c, for mashing the malt, the whole arranged and operating substantially as shown and described.

Second, The combination of bottom of the mash tab, and the distributor of \$\frac{1}{2}\$ for the double purpose of admitting water to said tub when necessary, and for drawing off the wort therefrom.

Third, The parager, e. perforated as described and for the purpose specified.

Fourth, The combination and arrangement of the circum.

peeded.
Fourth, The combination and arrangement of the cistern, B, pipe-column, g, and the perforated false bottom, i, in the manner and or the purpose substantially as described.
Fifth, The employment of the conical perforated false bottom, I's fifth, The employment of the conical perforated false bottom, I's fifth, The combination and constructed substantially in the man, er and for the purpose described.
Sitch, The combination of the boiler, B, plps, f, and column, g, start, and the contents and exit of start and a first having pipes, k and k, for the entrance and exit of start and the contents of B, the whole constructed, arranged ann operating in manner and for the purpose substantially as shown and decribed.

eribed.

Beventh, The combination of the solid wooden float, O, with the feture pipe, r, these parts being constructed, arranged and operating abstantially as shown and described.

Eighth. The employment of the cooling and heating vessel, D, in unnection with the mercury cup, nž, the inverted cup, nž, and the stem of levers, the several parts being constructed as shown, and whole arranged and operating substantially in the manner and

whole arranged and operating substantially in the manner and he purpose described, ath, The, combination and arrangement of the mash tub, A ag and cooling cistern, B, and termenting tun, C, in the manner fibed, for the purpose of mashing, boiling, cooling and ferment

49,152.—Composition for Lining Petroleum Barrels.—Robert Price, Jersey City, N. J.:

1 claim the preparation of barrels or other vessels for containing and transporting petroleum oil or similar substances, substantially described and for the purposes set forth.

D. S. Quimby, Brooklyn, N. Y.: 3,153.—Coal Stove.—D. S. Quimoy, Brooklyn, N. 1.: I claim the arrangement of the fot-air flue, o p, and box, q, in subhastion with the heater, a, and flues, I k I, as specified, in combination with less heater, as the property of the purposes specified.

49,154.—Watch Regulator.—George P. Reed, Roxbury,

19,104.— Watch hogometric and the spring, c, and its adjusted the application of the curved spring, c, and its adjusted the har-spring pine or study to the said spring, c, the whole substantially as and for the purpose explained.

Co. P. Reed. Roxb.

49,155.-Watch Escapement.-Geo. P. Reed, Roxbury.

M388.; I claim the combination of the movable detent, e, and the spr, and stop, p, with the lever, D, carrying a fixed detent, o, and anged in manner and so as to operate with the scape wheel and pulse pallet of the balance wheel, substantially as specified.

ine pairet of the balance wheel, substantially as specified.

Manchester, N. H.;

aim reducing the edge of the ax to the form desired when it is

defor use, and refining the steel at the same hear; the steel is

do to the ax, by means of dies, a and b, constructed and op
d substantially as herein described.

49,157.—Azimuth Compass.—E. S. Ritchie, Brookline

sistantially as specified.

I also claim the combination of the adjustable screen or shutter, or its equivalent, with the light-converging lens, E, combined the fore sight of the annulus, A, or its equivalent, and for use its annulus, A, or its equivalent, and for use its annulus, A, or its equivalent, and for use its annulus, A, or its equivalent, and for use its annulus, A, or its equivalent, and for use its annulus, A, or its equivalent, with the annulus, A, or its equivalent, and its fore sight, or fore and back sights, to be employed on a mass, in manner substantially as been indecided to explained.

I also claim the combination of the equivalent, its fore sight or it and back sights, and the light-convexing lens, F, the same I also claim the combination of the individual of the individua

specified.

laim the combination of the indicators, r g, with the two f, or the same and the auxiliary sight, s, and with the ance its equivalent, its fore sight, or fore and back sights, and converging lens, E, the same being as specified, laim the combination of the indicators, g g, with the f two f the representations, f is equivalent, its f or fore and back sights, and the light-converging lens, f being as specified.

ig as specified, the index mark, h, or it equiva-the combination of the index mark, h, or it equiva-light-converging lens, E, the annulus, A, and the force e equivalent thereof, the whole being arranged sub-nanner and for the purpose specified.

Machine for Upsetting, Cutting and Punching 1.—J. J. Rose, Elmwood, Ill.:

on consists in a povel arrange

9,159.—Sash Fastener.—A. H. Rowe, Hartford, Conn. I claim the revolving slotted cam, C, in combination with the case, and spring bolt, B, constructed and operating substantially as an gr the purpose set forth.

nsists in a revolving slotted cam, arranged in

such a manner that when the device is applied to a sash by turning the cam in one direction, the spring bolt is drawn in and the sash unfastened, allowing it to move up or down, and by releasing the cam the bolt is allowed to drop into suitable sockets made in the side of the window frame, at suitable intervals, and in this position it is locked by the cam, and the possibility of a spontaneous unfastening

49,160.—Photographic Lens.—Joseph Schnitzer, New York City:

I claim, First, A lens, A, constructed of a triplet front lens, B, and doubtlet back lens, C, substantially as herein set forth.

Second, The correcting lenses, h, i, and the disk, F, or its equivalent, applied in co-bunation with a lens, A, substantially as and for the purpose specified.

Third, The disk, F, or its equivalent, furnished with one or more correcting lenses, h, in combination with the (disphragm, G, and lens, A, constructed and operating substantially as and for the purpose described.

The object of this invention is a photographic lens, which com the object of this invention is a photographic test, and the bines with a short focus an angle; of eighty 'degrees, more or less, and which is so arranged that its focus can be adjusted, and that the same instrument can be used for pictures of different size.]

49,161.—Cutter for Wood-turning Lathe.—James Shan-non, Cohoes, N. Y. Antedated July 30, 1865: I claim the construction of a cutting tool, by the combination of a gouge or gouges, G, with a toothed cutter. B. formed as described, and attached to a revolving disc, substantially as set forth in the within specification.

within specification.

49,162.—Rallway Frog.—Theodore Sharts, Albany, N.Y.:
I claim the employment or use of a movable or detachable tongue, applied to a frog, in the manner substantially as and for the purpose herein see forth.

[This invention relates to a new and improved frog for single-

[This invention relates to a new and improved frog for single-track railroads, and it has for its object the dispensing with the ordinary switch, and, consequently, with a switchman.]

49,163.—Key-bolt Connection of Car Trucks.—J. J. Sherman, Albany, N. Y.:

I claim, First, The elastic key-bolt connection for railway carriages, when arranged and applied to operate against lateral or other horizontal impulies, substantially as described.

Second. Surrounding the pivot or key-bolt connections with indiarebor or other elastic substance, confined originate metallic cups or boxes, in such manner as but substance, confined originate montal motion of said key-bolt, but no vertical motion, substantially as described. 54.—Horse Rake.—S. M. Sherman, Fort Dodge, Iowa:

Iowa: I claim the combination of the S-formed wooden teeth, E, bars, e, arms, f f, link, F, and lever, G, all as specified.

[This invention consists in constructing the teeth of the rake of wood, bent or curved in S-form, and arranged or applied in such a manner as to form a cheap and durable horse rake, and which will operate perfectly, and be capable of being manipulated with the greatest facility.)

49,165.—Coal Stove.—James Spear, Philadelphia, Pa.: I claim the damper, C. with a hole in the center, or its equivalent, laced inside a stove, having direct draft, and arranged and operated a the manner and for the purpose herein set forth.

in the manner and for the purpose herein set forth.

49,166.—Ditching Machine.—Nathan Starbuck, Willmington, Ohlo:
I claim the wheel, E. provided with flanges, e. projecting beyond the rim, a, in combination with the plow, F, and scraper, I, substanlially as and for the purpose specified.
I also claim the inclined planes, L L, attached to the scraper bar, I, for the purpose set forth.
If unther claim placing the wheel, plow and scraper within a frame, C, placed or arranged within a frame, A, substantially as and for the purpose specified.

(This invention relates to a new and improved machine for excavating ditches, and it consists in the employment or use of a whee provided with flanges for cutting the sides of the ditch, a plow for raising the earth between the cuts made by the wheel, and a scraper and inclined planes for taking the earth from the wheel and dis-charging it to the sides of the ditch.]

-Window Glass .- Thomas D. Stetson, New York

City:
I claim as a new article of manufacture double or duplex glass (ightly joined at or near the edges and adapted to serve in the manner herein set forth.

49,168.—Adding Machine.—T. T. Strode, Mortonville,

Pa.; I claim the revolving disk, A, marked with figures on its cirerence and provided with a cam groove. c, and with cavities, ombination with the slotted disk, C, and index, D, constructed perating substantially as and for the purpose set forth.

49,169.—Calendar Clock.—T. T. Strode, Mortonville,

Pa.: claim the slide, B, marked with the names of the months a vided with openings, h, to operate in combination with cel. A, marked with figures from 1 to 31, and provided with cutric grooves, c, substantially in the manner and for the purp tein set forth.

49,170.—Closing Hand-hole Plates in Steam Boilers.— Joseph R. Taylor and Horace A. Towne, Centralia, Ill.:

III.: We claim the plug, B, inserted in the boiler plate, in combination with the cap, C, and clamp, D, substantially in the manner and for the purpose herein shown and described. (This invention consists in the use, for closing hand holes in steam

ilers, of a plug secured permanently in the boilers and bored out to give access to the interior of the same, in combination with a cap fitting on the surface of the plug with V or bell joint, and held down by a movable screw clamp, in such a manner that by taking or re iving said screw clamps the cap can be removed, and when the ca replaced, a tight joint can be produced without the use of india rubber or other costly packing.]

49,171.—Method of Preventing the Breaking of Glass
by Exposure to Heat.—Ell Thayer, Worcester,
Mass.:
I clasm the non-conducting lining when applied to the surface of
glass exposed to fire or to a high heat, substantially as set forth,

49,172.—Steam Generator.—Eli Thayer, Worcester,

Mass.;
First, I claim the tubular supporters of grates, substantially as set forth.
Second, In combination with their supporters, I claim the extension or continuation of the pipe or pipes into the combustion chamber, substantially as set forth.
Third, The continuation of these supporters with the sereen grates or bars, resting upon them, and also with the sediment extractor.

49,173.—Sled Brake.—Levi H. Thomas, Waterbury, Vt.:
First, I claim the vibrating self-adjusting bar, attached to the sliding trave, the same being connected with the levers and so operating the group; or dogs that they will adjust themselven to the density of the substance they come in contact with.

Second, I claim placing the pins ff; in such a position with the movible hooks, e.e. as to always insure their taking hold to break the force of the load when pressing forward.

49,174.—Steel Trap.—Levi H. Thomas, M. D., Water bury, Vt.; bury, Vt.:

I claim the jointed pan so constructed and arranged as to embrace both ends of the jaws, and hold them closed.

Second, I claim holding the trap set, the pan forming the catches ander the angles of the jaws.

Third. I claim placing springs within the circumference of the was acting directly upon the pan, whereby they hold the trap either

ws acting directly upon the bas, whereby to repring. Fourth, I claim the mode of constructing animal traps, whereby to pan forms the levers for setting.

Fifth, I claim the jointed double pan, in combination with the wring and jaws, the same being constructed and operating in the namer herein described for the purposes specified.

wanner neven described for the purposes specified.

49,175.—Manufacture of Wrought Iron.—Robert Thomas and Giles Edwards, Columbiana, Ala.:

We claim extracting wrought iron direct from its ore or from the oxide of iron, by subjecting a layer of pulverized ore, which is mixed with carbonaceous matter, to the action of heat and balling the metal as rapidly as it is set froe from the surface of said layer, substantially as described.

Second, Conducting the within-described process, substantially as described, upon an inclined or porous surface, substantially as set forth.

49,176.—Egg Beater.—Howard Tilden, Boston, Mass.: I claim a case or box provided with a consider wheel in the system the cade, this that the consideration of the box as it flows from end to end, when the box is shaden to the box as it flows from end to end, when the box is shaden 49,177.—Drill for Wells.—J. H. S. Tuck, Cambridge,

Ohio:
I claim locking drills for boring oil or other wells to their rods or hafts, substantially as and for the purpose above described.

78.—Cutting and Grasping Shears.—Samuel W. Valentine, Boston, Mass.; laim a cutting and grasping shears having a yielding hold fast, he purpose substantially as set forth.

I claim a cu

I claim a cutting and grasping shears having a yielding hold fast, for the purpose substantially as set forth.

49,179.—Burning Hydro-carbon Oils.—Delevan D. Van Norman, Lester B. Brown and Enoch R. Morrison, Petroleum Centre, Pa.:

First, We claim placing in the furnace or fire box of a steam oliciler a retort for generating gas from petroleum or other hydrorarbon liquids, the retort being surrounded by a steam chamber, from which superheated steam may be used with a small portion of arbureted hydrogen gas for fuel.

Second, We claim placing a copper or other metal coil of pipe in the bottom of the retort, through which superheated steam is admitted, to hasten and evolve the gas from hydro-carbon liquids.

Third, We claim one or more pipes leading from near the top of the retort down under the bottom of the same, for the purpose of more than the steam in the boiler is at working pressure. Fourth, We claim the kmoke jacket surrounding the retort and team chamber, in combination with the fire pan, whereby the moke of the burning liquid is brought in contact with gas and team, and is entirely consumed.

Fifth, We claim the flact valve placed in the retort for controlling he supply of petroleum or other liquids for generating gas, in the anner herein set forth.

Sixth. We claim the manner of separating the water from the rade oil, by pressing a coil of steam pipe through the tank, as descretch, We claim the purpose of lighting a small expense of the prest, as the purpose of lighting a small expense of the purpose of lighting a small expense of the prest, as the purpose of lighting a small expense of the prest, as the purpose of lighting the retort, as the purpose of lighting a small expense of the prest, as the purpose of lighting a small expense of the prest, as the purpose of lighting a small expense of the purpose of lighting a small expense of the prest, as the purpose of lighting a small expense of the prest, as the purpose of lighting a small expense of the purpose of lighting a small expense of the prest, a

scribed.

Seventh, We claim the perforated coil or curcular, q, in the top pipe of the retort, for the purpose of letting a small portion of steam into the top of the gas-generating retort, G, to commingle with the gas as it escanes for ignition.

Eighth, We claim the arrangement of Iron or other suitable metallic pipes for superheating steam in the furnace of a steam boiler, as herein described, in combination with the gas-generating retort. Ninth, We claim the construction and arrangement of the steampressure governor valve, in combination with the spring balance, as and for the purposes set forth.

49,180.—Dogs for Lathes.—Wm. Vine, Norwalk, Conn.: First, I claim the arrangement of the two adjustable plates, A and B. in the manner and for the purpose substantially as herein described. Second, The arrangement of the corrugated faces, or their equivalent, substantially as set forth.

ient, substantially as set forth.

49.181.—Cutting Soles of Boots and Shoes.—J. M.

Walker, Worcester, Mass.:

Walker, Worcester, Mass.:

Tist, I claim cutting and beveluge the rear end of tap soles at one and the same operation, substantially as set forth.

Second, I claim the use and employment of the double curved knife, with an irregular edge, b, e substantially as and for the purfaile, with an irregular edge, b, es substantially as and for the purfaile.

Second, I claim use use the second of the picker staff Connection in Looms.—Warner Welland, Deakam, Mass.:

Welland, Deakam, Mass.:

Welland, Deakam, substantially as described, of the picker of the other second of the other second of the s

Welland, Deakam, Mass.:

I claim the arrangement, substantially as described, of the picker staff and the socket, the bearings and the pin of its carrier.

49,183.—Harvester.—Thomas Welch, Churchville, N. Y.:
First, I claim the combination and arrangement of the box, D, constructed, as shown and described, with the crank pin, C, socket, d, wheel, or its equivalent, and driving shaft, A, of reapers and mowers, for the purposes specified.

Second, The joints, I and J, constructed and arranged as shown and described, in combination with the crank box, D, and cutter bar, F, for the purpose set forth.

ar, F, for the purpose set forth.

9,184.—Reaping and Mowing Machine.—Thos. Welch,
Churchville, N. Y.:
I claim the arrangement of the ratchet, R, fixed, D, the ground
theels, B, in combination with the adjustable spring pawls, P
sigidly attached to the main axle, A, substantially as and for the
urposes described.

Second, The primary pawl bar, C rigidly attached to the main
xile, A, in combination with the adjustable or sliding auxiliary bar,
y, the independent spring pawls, P, and steady pin, g, constructed,
tranged and operating in the manner and for the purposes shown
and described.

Third, I claim the employment or use of the circular stock, J, and
the slide, S, the latter having a ratchet edge, and both being aranged and operating in the manner shown and for the purposes
pecified.

pecified.

Fourth, The roller, T. in combination with the circular slide, S, s shown, and for the purposes set forth.

Fifth, In combination with the stock, J, and brace, L, the brace ar, M, arranged in the manner and for the purposes set forth.

Sixth, The lever, t, and ratchet wheel, w, constructed and an anged as shown, in combination with the circular ratchet slide, S, and locking latch in combination with the circular ratchet slide, S, and locking latch in combination with the circular ratchet slide, S,

Sixth, The lever, i, and ratchet wheel, w, constructed and ar ranged as shown, in combination with the circular ratchet alide, S, and locking latch, r.

Pins, I claim the combination and arrangement in harvesters of the set screw, S, and boxes, B and D, with the head, A, the bearing face between the latter and box, D, being made convex, substan-tially in the manner and for the purposes set forth.

Second, In combination with the crank head or box, A, of harvest-ers, the chambered cap, C, constructed, arranged and operating excited.

49,186.—Harvesting Machine.—Milton A. Wheaton, Snisun City, Cal.:

First, I claim, in combination with the cam teeth, B, the employment or use of the friction rollers, D D', and the jointed vibrating rods, E E', or their equivalents, for the purpose specified and set forth.

ttn.
Second, I claim the employment or use of the collars, H H, or elr equivalent, with the depression and projection, substantially and for the purpose specified.

as and for the purpose specified.

49,187.—Stamping and Crushing Mill.—J. D. Whelpley and J. J. Storer, Boston, Mass.:

We claim, in combination with the radial arms, or disks, of a grinding, crushing or pulverzing mill, the employment of a plate, paddle, or beater, A, constructed of chilled east iron, incorporated in casting, with wrought iron or other suitable malleable metal, substantially as set forth and for the purposes described.

47,188.—Gas Regulator.—Joseph S. Wood, Philadelphia,

Pa.:
Prest, I claim passing the gas through the valve, H, by means of he openings, h h', substantially as described.
Second, I claim the valve, H, in combination with the stop, K, substantially as described.
Third, I claim the combination of valve, H, stop, K, and set crew, m, substantially as described.

49,189.—Bed Bottom.—William Workman and C. F Swain, Ripon, Wis.; We claim connecting the straps, C, having the slats, B, attached

thereto, or the slats themselves, to the rods or projections, c, in su a manner as to keep said slats extended, and employed in combin tion therewith the springs, a a, and cross pieces, A A, substantial as and for the purpose herein set forth.

Straw Cutter .- George T. Wright, Cincinnati,

49,190.—Straw Cutter.—Green 49,190.—Straw Cutter.—Green 49,190.—Straw Cutter.—Green 49,190.—I claim the arrangement of the ratchet wheel, O, pawl, P, in colination with the slotted arm, R, and perforated disc, S, for grating the rotation of the feed rollers, E, in the manner described ting the rotation of the feed rollers, E, in the manner described.

**The color of the rotation of the feed rollers, E, in the manner described in the rotation of the feed rollers. The rotation of the rotatio

ting the rotation of the feed rolices, K, in the manner described.

49,191.—Machine for Cutting Rings from Ivory.—Chas.

H. Bassett (assignor to The Birmingham Button Company), Birmingham, Conn.:

I claim forming rings from any material out of which buttons or other circular articles are cut, by cutting them from that portion of the makerial which is exterior to the button, and at the same operation with the cutting of the button, by the means substantially as described.

described.

49,192.—Process of Varnishing and Polishing Wood.—
George Bricker, Sr., Newville, Pa., assignor to himself and George B. Hammer, Harrisburg, Pa.,
I claim the process herein described of varnishing and polishing wood, substantially as set forth.

wood, substantially as set forth.

49,193.—Beater Press.—L. C. Field (assignor to himself,
J. P. Frost and W. S. Bellows), Galesburg, Ill.:
I claim, Frist, The two levers, F. F. employed in combination
with the rope, H, beater, D, and notches, g and r, in Que manner
and for the purpose set forth.
I also claim the standards, n n, on the beater, D, when used in
combination with the levers, F. F. and rope, H, for the purpose specfied.

combination with the levers, F.F., and rope, **, **, **

I also claim the windlass, E. composed of two drums, d.h., when used in combination with the executive, j. to operate either the levers or beaters, at the will of the attendant, as described.

I also claim the ways or track, I, at the bottom of the press box and arranged substantially as shown for the discharge of the bale from the press box.

from the press box.

49,194.—Reaping Machine.—Henry Fisher (assignor to C. Aultman & Co.), Canton, Ohio:

I claim swinging and dumping table, G, operated automatically, such as herein described and represented.

I also claim in combination with a swinging and dumping table, the hinged section, d, at its front edge, as and for the purpose substantially as herein described.

I also claim in combination with a swinging and dumping or doping table, a shield, or holder, operating in connection therewith, as and for the purpose described.

and for the purpose described,

19,195.—Starting Cars.—A. F. French (assignor to himself and Ed. Chas. Terrill), Franklin, Vt.:

I claim the lever, F. pawl, c. in combination with the ratchet wheel, d, draught pole, D, and with the axie or wheel of a street car other vehicle, constructed and operating substantially as and for the purpose set forth.

[This invention consists in the application of a lever pawl and

ratchet, in combination with the draught rod or draught chair, and with the axle of a stretcher or other vehicle, in such a manner that with the axis of a stretcher or other. Tentile, in such a manner that in starting the car the strain exerted by the draught animal or ani-mals is increased by the purchase of the lever, and the operation of starting the car or other vehicle is rendered comparatively easy, and ean be effected with much less exertion for the draught animanimals than by the ordinary arrangement.]

49,196.—Steering Apparatus.—Nathan Richardson (assignor to himself and Eli F. Staey), Gloucester, Mass.:

I claim in a steering apparatus made with a worm gear on the ruder head, and operated by means of worms or endless screws meshing therein, the arrangement of said screws outside of the periphery of said gear and substantially in the plane, as and for the ruder head, as the control of the periphery of said gear and substantially in the plane, as and for the ruder head so the control of the periphery head so the control of the periphery of said gear and substantially in the plane, as and for the ruder head so the control of the periphery of said gear head so the control of the periphery of said gears and substantially in the plane.

purpose specified.

Also arranging the endless screws with reference to the gear on the rudder head, so that by forcing the screws toward the center of the rudder head it will be prevented from lateral motions.

the rudder nead it will be prevented from lateral motions.

49,197.—Life Boat.—A. L. Shears, Flint, Mich., assignor to himsell and H. T. Woodman, Dubuque. Iowa. I claim the general arrangement of the boat herein described of the air chambers or spaces for storage of provisions, etc., water, scuppers and thwarts susceptible of being raised or lowered at pleasure for commanication with the air chambers of the boat, arranged together and operating substantially in the manner and for the purpose specified.

[This invention relates to some important improboats, whereby their efficiency is much increased, and the safety of gers more insured than with such boats as heretofore

49,198.—Salve.—Wm. Slape, Salem. N. J., assignor to himself and H. S. Marsh, Philadelphia, Pa.:

I claim a salve composed of the osed substantially as set forth.

I claim a salve composed of the within-nameu ingredients, composed substantially as set forth.

49,199.—Steam Boiler.—Wm. Mont Storm (assignor to himself and R. Charlton Mitchell), New York City:
First, I claim the relative arrangement of the parts of my steam boiler, substantially as follows, vir. In a cylindrical borizontal its middle, with grate bars running transversely to its length, said furnaces being separated by a water space or "leg," and their products of combustion respectively, passing right and left through flues (preferably small tubes), to chambers, il, and thence through some proper conduit to their final exit, all substantially as described.

Second, I claim in conjunction with the other general arrangement of the parts of this boiler, the application of a series of auxiliary draft-heating tubes running the entire length of the horizontal shell, from its end to its furnaces respectively, in the manner and for the reason given.

Third, I claim the hollow head or "tonipion." with its conduits.

Third, I claim the application of the sleeve, mm, through the Fourth. I claim the application of the sleeve, mm, through the Fourth. I claim the application of the sleeve, mm, through the

or circulation, substantially in the manner and the received.

Fourth, I claim the application of the sleeve, m m, through the feam drum and chimney, for the objects described.

seean drum and enimney, for the objects described.

49,200.—Flour Sifter.—George W. Tileston (assignor to Asa Wilmot) New Haven, Conn.:

I claim as a new article of manufacture, a flour or meal sifter, consisting of a curvilinear vibrating sieve, and a crushing or pulverting roller, when the whole is constructed and fitted to produce the result, substantially as herein described.

49,201.—Composition for Paint.—James C. Wendrem, Albany, N. Y., assignor to Wheeler, Mellick & Co., Albany, N. Y., and Edward Wackerhagen, Green-ville, N. Y.:

osition specified for mixing with pigments to form Barrel for Holding Petroleum.-George

williamson, Gouldsborough, Pa., assignor to himself and D. W. Lee, Wilkesbarre, Pa.:
I claim, First, Filling the space between double barrels, designed to contain petroleum or other volatile Suids, with a solution composed of water, chalk or its equivalent, substantially as described. Second, With a solution composed of water and chalk or other mineral equivalents.
Third, With a solution composed of water and glue or other glutinous equivalent.

49,203.—Machine for Refitting Stop Valves.—Samuel Wing, Monson, Mass., assignor to himself and George R. Topliff, Brooklyn, N. Y.:

I claim, First, The concave mill, B, provided with an internal yielding center, c, and arranged in suitable bearings, a, in combination with the adjustible center, C, constructed and operating substantially a and for the purpose set forth.

Second. The guide. E, and conical mill, D, applied in combination with each other, substantially as and for the purpose described.

9,204.—Cultivator and Planter.—E. M. Wright (assign-or to himself and A. C. Diboll) Wilmington, Ohlo: I claim, First, The construction and arrangement of the under

cultivator frames, composed respectively of long central beams, D. D. fixed but adjustable in position and of short side pieces or beams, E. E. hinged and morable or adjustable to and from the said central beams, and the said central beams, and the said central beams, and the said central seams, and the said central seams, and the said central seams, and the said property of the said central seams, and the said property of the said central seams, and the said pieces or beams, E. E. of the under frames, through the means of the levers, Q. Q. connecting bars, p. p., rods or bars, F. P., all ubstantially as herein described.

Fourth, I also claim operating the seed-dropping wheels, U. U. be governing wheel, Q. under the control of the driver, by means of the lever-armed rock shaft, S. and flexible connecting rods, as and t. or their equivalents, substantially as herein described.

Fifth, I also claim the projecting ledge, v., in the spiral seed separator, substantially and for the purpose specified.

Seventh, I also claim the friction plate, r, between the brush, w, and te fastening wedge, for the purpose specified.

Seventh, I also claim the construction of the drill teeth or shovels, with sockets or morties fitting over their standards, for the purpose pecified.

pecified.

9,205.—Machine for Hulling Grain.—Christophe Ours
Bullot (assignor to Bullot & Company), Santa Rosa
de los Andes, Chili:
I claim the decorticating apparatus herein described, the same
nuisting of the grinding disks, G L, feeding screw, E, fans, M P,
ud air pipes or conductors, N O, arranged to operate in the manner
escribed.

[This invention consists in subjecting the corn or other grain to be orticated to the influence of moisture for a few minutes previou to exposing the same to the decorticating apparatus, which is comto exposing the same to the decorated appearance, which is copied of two pairs of wooden grinding disks; the grinding surface of the first being covered over with wire gause, and the other with leather or other flexible material, and those of the second pair being overed with leather or other flexible material only, in combination

49,206.—Suspended.

49,207 .- Lock for Satchel .- Bernard Steinmetz, Paris,

1,207.—LOCK for Datement - Determined the American Strange : I claim the arrangement of a spring lever, D, in combination with tumbling bolt, V, acted upon by a spring, s, and operated by means a key, when combined with the jaw frames of a carpet bag, tehel, etc., and operating in the manner and for the purpose subantially as described and set forth.

49,208,—Wrench.—James White, Cleveland, Ohio: I claim the stop, L, operating as described, in combination whe disk, F, and adjustable jaws of the wrench, whereby they car used at any desirable angle, and in either way, without removing wrench from the nut, as specified.

REISSUES.

2,040.—Box for Hats and Bonnets.—Oilver A. Dai
Washington, D. C. Patented March 14, 1865:
I claim a hat box made of paper, cloth, leather, or the equiv
thereof, with respect to lightness, and strengthened by the u
ribs, substantially as described.

bs, substantially as described.

041.—Seed Coverer for Grain Drills.—John S. Gage,
Dowaglac, Mich. Patented Aug. 26, 1862;
I claim, First, The seed coverer as berein described, constructed
th two concave or converging arched palms, a, which are shaped
t helf rear and bottom edges as represented, and are connected
an intermediate portion, e, so as to have a space, b, between
em, the said coverer being made of one piece of metal only, and
lapted to be applied to the nearly horizontal arms, A.A., of the
ding machines, so as to operate upon the sides and top of the
size or row, as herein specified.

Second, Providing the coverer with a lug, c, adapted to receive a
sight, substantially as described.

-Tackle Hook.-Joseph W. Norcross, Middle-

town, Conn .: town, Conn.:

I claim the strap or brace, B, which forms the upper section

to lower eye of the hook, A, and is made to swivel on the neck

ald hook, and connected to its points, substantially in the man

and for the purposes set forth.

and for the purposes set forth.

2,043,—Lightning Arrester for Telegraphs.—George A-Stearns, Roehester, N. Y. Patented June 21, 1864:
I claim the protection of electric telegraph lines from the disturbing influences of atmospheric electricity by means of a small, fine guard-wire, inserted in the main or line circuit thereof, in such a manner as to complete said circuit, when such guard wire is used in combination with a metallie surface or with a series of metallic points, connected with the earth and placed in close proximity to the line at or in advance of said guard wire, all substantial; in the manner herein set forth.

The same of the same o

suostanually in the manner herein set forth.

2,044.—Machine for Sheeting Plug Tobacco.—W. J. Vøn Horn and Wm. Alexander, Louisiana, Mo. Patented December 27, 1859:
First, We claim the combination and arrangement of the two belts, C and G, or their equivalents, with a cylinder, B, and a series of pressing rollers, F. arranged and operating substantially as and for the purposes herein specified and shown.

Second, We claim in combination with 1.3d cylinder, pressing rollers and belts C G, the employment of the redleng table, J, all arranged and operating substantially as shown and described.

Third, We claim the employment of the rollers, L L, provided with the circular knives, a, and the corresponding channels or grooves, substantially as and for the purposes delimited and described.

Fourth, We claim the employment of the rollers M M promitted.

Fourth, We claim the employment of the rollers, M.M., provided with the longitudinal cutters, N, arranged and operating as and for the purposes set forth.

Fifth We claim the combination and arrangement of the two pairs of rollers, L and M. provided respectively with the cutters, a and N, arranged at d opreating substantially as and for the purposes herein set forth and shown.

Fifth, We claim the combination and arrangement of the cylinder, B, rollers, F, table, J, belts, C, G, cutting rollers, L and M, constructed and operating substantially as and for the purposes herein specified and described.

2,045.—Sawing Machine.—A. E. and J. V. Warner, Norwalk, Ohio. Patented May 30, 1865: We claim the above-described arrangement of operating a circular waw, in combination with a cross-cut saw, or separately, substantially

as and for the purposes set forth.

2,046.—Skeleton Skirt.—S. H. Doughty, Clinton Township, N. J., assignee by mesne assignments of Jas. Draper. Patented Oct. 4, 1859. Relssued Dec. 27, 1859:

I claim the new manufacture of skeleton skirt, substantially as described, consisting of a series of tapes woven in the direction of their length, in alternate sections, as single and as double tapes, with the hoops inserted in the loops formed by wearing the tapes as double tapes, and there secured to prevent the tapes from sliding laterally on the hoops.

JULY 25.

JULY 25.

JULY 26.

2,034.—Turndown enameled Paper Collar.—James HHoffman, New York City. Patented Jan. 24, 1855.
I claim the new article of manufacture consisting of a turndown or folded enameled paper collar, substantially as described.
2,035.—Carpet Bag Frame.—Samuel Lagowitz, New York City. Patented July 7, 1863:
I claim the cover, B, made of elardic wood and attached to one end of the laws, A, by stays or brackets, all as herein shown and described.

6.—House for Preserving Fruit, Etc.—Benjamin M. Nyce, Cleveland, Chio. Patented November 2, 1858. Reissued October 23, 1860; again May 16, 1865:

with absorbents of moisture, substantially as set forth, either with or without the agitator, K.

or without the agitator, K.

2,037.—Preserving Fruit and other Perishable Substances.—Benjamin M. Nyce, Cleveland, Ohio. Patented November 2, 1858. Reissued October 25, 1869; again May 16, 1865:

I claim the method of preserving fruit in a chamber whose walls, doors and floors are practically air tight, and so proof against the lagress of heat and moisture, as to maintain by the aid of icc. on a metal floor above a uniform temperature of from 34 to 37 F. throughout the year, and by the use of absolvents within satisfiamed producing any desired degree of dryness.

cnameer producing any desired degree of dryness.

2,038,—Preserving Fruit and Other Perishable Substances.—Benjamin M. Nyce, Cleveland, Ohio. Patented November 2, 1858, Reissued October 23, 1860; again May 16, 1865;

I claim the above described outside air tight casings of walls, when used in combination with a chamber chilled by ice on a metalic floor, on its upper part, with absorbents of moisture, within said chamber.

2,039.—Steam Engine Governor.—Thomas Silver, New York City. Patented April 26, 1859:
I claim the combination of a spring with a momentum wheel, and adjustable speed limiting vanes, the whole constructed with the com-bination of the peculiarly adjusted sectors, pinion and links, as fully described and set forth.

DESIGNS.

2,149.—Bass Relief for Bust of Abraham Lincoln.— Elizabeth V. Bunting, Philadelphia, Pa.

2,150.—Stove.—Gardner Chilson, Boston, Mass

2,151.—Trade Mark.—D. L. Gold and J. B. Adams, Springfield, Ill.

2,152.—Carpet Pattern.—E. J. Ney (assignor to the Lowell Manufacturing Co.), Lowell, Mass.

2,153.—Plate of a Cook Stove.—Garrettson Smith and Henry Brown, Philadelphia, Pa., assignors to Marshbank & McConkey, Lancaster, Pa.

2,154, 2,155.—Stove Base.—N. S. Vedder (assignor to Cox, Church & Co.), Troy, N. Y. Two Patents.

2,156.—Cook Stove.—N. S. Vedder (assignor to Cox, Church & Co.), Troy, N. Y.

Top of a Stove.—N. S. Vedder (assignor to Cox, Church & Co.), Troy, N. Y.
 Lock Stove.—Russell Wheeler and S. A. Bailey, Utlea, N. Y.



FOR SEVENTEEN YEARS.

MUNN & COMPANY, the SCIENTIFIC AMERICAN, have act

ed as Solicitors and Attorneys for procuring "Letters Patent" for new favorations in the United States and in all foreign countries during the past secondors years. Statistics show that nearly ONE-HALP of all the applications made for patents in the United States are solicited through this office; while nearly THEEE-FOURTHS of all the patents taken in foreign countries are procured through the same source. It taken in foreign countries are procured through the same source. It is almost needless to add that, after eightess gearge' experience in pre-paring specifications and drawings for the United States Patent Office, the proprietors of the SCIENTIFIC AMERICAN'are perfectly con-versant with the preparation of applications in the best manner, and the transaction of all business before the Patent Office; but they take pleasure in presenting the annexed testimonials from ex-Co nerslof Patents

missionerajof Patents.

MESSER, MUNE & CO.:—I take pleasure in stating that, while I be
the office of Commissioner of Patents, MORE THAN ONE-POURTH
ALL THE BUSINESS OF THE OFFICE CAME THROUGH YOUR HAPPS.
have no doubt that the public confidence thus indicated has be
fully deserved, as I havefalways observed, in all your intercourse wi
the office, a marked degree of promptness, skill, and fidelity to t
interests of your employers.

Yours very truly,

[See Judge Holt's letter on another page.]

[See Judge Holt's letter on another page.]

Hon. Wm. D. Bishop, late Member of Congress from Connecticut, succeeded Mr. Hoit as Commissioner of Patents. Upon resigning the office he wrote to us as follows:

MESSISS. MUNN & CO.—It gives me much pleasure to say that, during the time of my holding the office of Commissioner of Patents, a very large proportion of the business on inventors before the Fatent Office was transacted through your agency; and that I have ever found you faithful and devoted to the interests of your clients, as well as eminently qualified to perform the duties of Patent Attorneys with a seminently qualified to perform the duties of Patent Attorneys with xill and accuracy.

Very respectfully, your obedient servant, WM. D. BISMOP.

THE EXAMINATION OF INVENTIONS.

THE EXAMINATION OF INVENTIONS.

Persons having conceived an idea which they think may be patent able, are advised to make a sketch or model of their invention, and submit it to us, with a full description, for advice. The points of novelty are carefully examined, and a written reply, corresponding with the facts, is promptly sent, free of charge. Address MUNN & CO., No. 37 Park Row, New York.

DEFLIMINARY EXAMINATIONS AT THE PATENT OFFICE. PRELIMINARY EXAMINATIONS AT THE PATENT OFFICE.

The service which Messrs. MUNN & CO. render gratuitously up-examining an invention does not extend to a search at the Pater Office, to see if a like invention has been presented there; but is a Omes, to see it a fine invention has oven presented there; but is a sopinion based upon what knowledge they may acquire of a similal invention from the records in their Home Office. But for a fee of \$\frac{3}{2}\$ accompanied with a model, or drawing and description, they have is special search made at the United States Patent Office, and a report setting forth the prospects of obtaining a patent, &c., made up and realied to the inventor, with a pamphlet, giving instructions fe further proceedings. These preliminary examinations are mad through the Branca Office of Messrs. MUNN & CO., corner of and Seventh streets, Washington, by experienced and competent per Many thousands of such exami ations have been ma

sons. Many thousands of such examinations have been made throug this office, and it is a very wise course for every inventor to pursus Address MUNN & CO., No. 37 Park Row, New York.

The Patent Laws, enacted by Congress on the 2d of March, 1861 at now in full irore and prove to be of great benefit to all parties whare concerned in new inventions.

The law abolishes discrimination in fees required of fo cepting natives of such countries as discriminate against citizens the United States—thus allowing Austrian, French, Belgian, Englis Russian, Spanish and all other foreigners, except the Canadians, im the insulated and cooled preserving chamber, J, provided enjoy all the privileges of our patent system (except in cases of signs) on the above terms. Foreigners cannot secure their invent by filing a caveat; to citizens only is this privilege accorded. CAVEATS.

Persons desiring to file a caveat can have the papers prepared in the presst time by sending a sketch and description of the invention the Government fee for a caveat us \$10. A pamphlet of advice re-garding applications for patents and caveats is furnished gratis, or application by mail. Address MUNN & CO., No. 37 Park Row, New

HOW TO MAKE AN APPLICATION FOR A PATENT.

HOW TO MAKE AN APPLICATION FOR A PATENT.

Every applicant for a patent must furnish a model of his invention is susceptible of one; or, if the invention is a chemical production, he must furnish samples of the ingredients of which his composition consists, for the Patent Office. These should be securely packed, the uventor's name marked on them, and sent, with the Government fees, by express. The express charge should be pre-paid. Small models from a distance can often be sent cheaper by mail. The safest way to remit money is by a draft on New York, payable to the saisst way to remit money is by a drart on sew tors, payase to use order of Mesers, MUNN & CO. Persons who live in remote parts of the country can usually purchase drafts from their merchants on their New York correspondents; but, if not convenient to do so, there is out little ris in sending bank bills by mail, having the letter regis tored by the postmaster. Address MUNN & CO., No. 37 Park Row New York.

REJECTED APPLICATIONS.

Meserr. MUNN & CO. are prepared to undertake the investigation and prosecution of rejected cases, on reasonable terms. The close proximity of their Washington Agency to the Patent Office affords them rare opportunities for the examination and comparison of resences, models, drawings, documents, &c. Their success in the prosecution or rejected cases has oeen very great. The principal portion of their charge is generally left dependent upon the final result.

All persons having rejected cases which they desire to have prosecuted, are invited to correspond with MUNN & CO., on the subject,

cated, are invited to correspond with MUNN & CO., on the subject, giving a brief history of the case, inclosing the official letters, &c. Communications and remittances by mail, and models by express (prepade) should be solvessed to MUNN & CO. No. 37 Park Row. New

RATES OF ADVERTISING.

TWENTY-FIVE CENTS per line for each and every insertion, pay able in advance. To enable all to understand how to calculate the amount they must send when they wish advertisements published we will explain that eight words average one line. Engravings will not be admitted into our advertising columns, and, as heretofore, the publishers reserve to themselves the right to reject any advertiser

VALUABLE PATENT RIGHT FOR SALE.—THE V ALUABLE FAIEM! BIGHT FUB SALE.—THE value distribution of the sale of the sal

WAIT'S IMPROVED JONVAL TURBINE WATER
WHEELS—After three years' trial in all positions, and under heast surying from 2½ to 35 feet, they have been proved to be
the most economical, safe and reliable wheel used in the country—
giving. In some instances, as high as 90 per cent of the whole power
of the water. They are warranted to give 84 per cent, if properly set
up. We are selling hem at a very low figure.
Circulars sent on application.

P. H WAIT.

P. H WAIT,

BODGE'S GRAIN SEPARATOR, PERFECTED AND found to be far shead of any Grain Separator in a sistence Found to be far shead of any Grain Separator in existence the State of New York is now for sale in large or smail quantitie am also agent for the Eastern States. For information apply to D. D. HODOMAN.

122 Bath, Steuben Co., N. Y.

A GOOD OPPORTUNITY,—THE OWNER OF A. Factory and Store would engage in the manufacture and sai of a good paying merchantable article, in which his factory, with power and machinery, could be-advantageously employed. Addres Box 6 4, Post Office, Philadelphia, Pa. 7 2*

INVENTORS AND PATENTEES, NOTICE.—THE Massachusetts Mechanics' Fair open Sept. 30. 100,000 visitors are expected. We shall give our personal attention during the Fair of Mechanics and Models consigned to us. Parties which is their patent can also have them on exhibition previous to and after the Fair, at our salesroom for patents and patented articles. For further information address SPENCE & CO., No. 47 Hanover street, Boston, Mass.

PATENT FOR SALE.—THE PATENT RIGHT OF insure a large demand. Can be had with or without the machiner or manufacturing. It will be sold for the profits realized the pager, and is worthy the attention of any one searching for profital pasioess. or for any party having a machine shop not fully enjoyed. Address Box No. 289, Woroscher, Mass.

ANAGER WANTED.—THE UNDERSIGNED DE-SIRES to engage a Manager to take charge of the Calvert Iron and Nail Works, in Baltimore. The applicant must be a thorough practical machini-t and engineer, accustomed to control hands, and firing excellent references. A man who has carried on business for simpleff proferred. To a suitable man a permanent situation and a broper salary will be given. Address MARSHALL P, SMITH, Box 1,365, Baltimore.

WANTED—THE ADDRESS OF ANY ONE WHO
desires to make money in one of the best and most useful insentions ever patented—McNamee's Bread and Fastry Board and
flour Chests Combined. Patented 1861. During the war I give it
of attention, and sold the rights for Penn yivania, New York, illiois and Masouri. I now offer for sale the remaining territory, by
tates or Counties, at a bargain. It need only to be seen to be aprowed. Send for circular, with engraving.

J. McSAMEE,
19

VOLUMES I., II., III., IV., V., VI. (NEW SERIES), SCHENTIFIC AMERICAN, In stiy bound, for sale cheap. Address L. M. MONTGOMERY, Box 7.3, New York City.

AGENTS WANTED IN A NEW BUSINESS which pays from \$4 to \$8 per day. Full particular free. Address M. SANBORN & CO., Brasher Falls, N. Y.

WELLS'S ANACONDA HORSE HAY FORK—THE lightest, most convenient to bandle, and, in efficiency, withgrade and solid another year. J. L. WELLS, Ames, N. Y.

ATENT DRILL CHUCKS—ONLY 7-6TH INCH IN diameter, holding from 3-16th down to 1-100th. They are made tho best steel, and hardened; are light, true and strong. Address 100S. H. WORRALL, LAwrence, Mass.

MAKE YOUR SMALL DRILLS OF STEEL WIRE and use Worrall's Chucks for holding them. All warranted satisfactory or the mosey refunded. Sent by mail. THOS. H. WOR. RALL, Lawrence, Mass.

LUMBER CAN BE SEASONED IN TWO TO FOUR days, by Bulkley's Patent, at an average cost of \$1 per M. from the green. For circular or information address 7.5*

STATE AND COUNTY RIGHTS FOR CONCRETE Sidewalks, Etc.—Equal to Asphaltum. Pavements for sale or trade on easy terms. H. MEYERS, Hyde Park Luzerie Co., Pa. 72

WANTED—A SITUATION TO SUPERINTEND A ROLLING MILL.—Have 27 years' experience in the iron business. Have no objection to go South. Address A H. C., Box 441, 12

DUSSAUCE'S TANNING, CURRYING AND LEATHER DRESSING.—The greatest treatise of the kind every published in any language or country. Just Published. A New and Complete Treatise on the Arts of Tanning, Currying and Leather-dressing, comprising all the Discoveries and Improvements made in France, Great Britain and the United States. Edited from Notes and Decuments of Messrs. Salleron, Grouvelle, Duval, Dessables, Labarraque, Payen, Rene, De Fontenelle. Malepeyre. Etc. By Prof. H. DUSSAUCE, Chemist, lately of the Laboratories of the French Go ernment, viz. He Mining, Botanical Garden, the Imperials of Arts and Manufacture of the Gobelins, the Conservatore Imperials of Arts and Manufacture of the Gobelins, the Conservatore Imperials of Arts and Manufacture of the Gobelins, the Conservatore Imperials of Arts and Manufactures; Professor of Industrial Chemistry to the Polytechnic Instatute, Faris Illustrated by 212 wood engravings. In 1 vol., 8vo., 700 pages. Price 310 by mail, Tree of posters.

F. O. Orders the most desirable form of remittance when to be had.

Persons wishing to pay on delivery can do so, having the book sent by express, they paying reight.

The betriber takes very graph and pleasure in announcing the completion and publication of Professor Dunesance's Great Treather and the completion of the United States and Great Britain, for which latter market a large order has been received in advance of publication from Messre.

S. Low, Son & Marston, of London, with the feeling that no intelligent and enterprising tanner, currier or leather dresser can allow the completion of the composition of the completion of the composition of t

o be without if.

In all the several branches of these important arts, as well in repard to the various raw materials, whether hi es, barks or liquors,
is to processes old and new, genera' manipulation and machinery,
t will be found well-nigh exhaustive. No previous publication in
his country or Europe has even remotely approached it in extent or

Talue. The edition printed is small, the advance orders large, and tho rishing the book would do well to send in their orders immediate!

Baird's New Catalogue of Practical and Scientific Books sent for f postage to any one who will favor me with his address.

HENRY CAREY BAIRD, Industrial Publisher,

No. 406 Walnut street, Philadelphia.

TRNI'S COAL OIL AND PETROLEUM. JUST PUBLISHED. COAL OIL AND PETROLEUM: their Origin, History, Geology and Chemistry, with a view of their importance in their bearing upon National industry. By Henry Erni, A. M. M. D., Chief Chemistry and Pharmacy. Shelly Medical College, Nashville, Tenn. In 1 vol., 12mo., price \$2.50.

Tenn. In 1 vol., 12mo., price \$2.50.

Some Facts in Regard to Scientific Discoveries.

Dry or Destructive Distillation of Organic Bodies. Products jobtained from Wood, Coal or Turf.

Dry or Destructive Distillation of Organic Bodies. Products jObtained from Wood, Coal or Turf.
Ingredients of Beech-wood Tar.
III.
Products of the Distillation of Cannel Coal and their Chemical Composition.

IV.

Yanuiacture of Photogenic Oils and Other Useful Products from oal, Wood and Turf-Variation of the Result According to the Temerature Employed in Distilling.

Distillation of Coal Tax.

Purification of Coal Oil or Kerosene, and of Bituminous Oils, to gether with a Brief History of these Oils; and Comparison of Artificial Products with those found in Nature.

Brief History of Bituminous and Kerosene or Empyreumatic Oils. Comparison of Artificial Products with those found in Nature.

VI.

Petroleum or Rock Oil—Its Chemical Composition—Illuminating Power.

Refining of Petroleum.
Illuminating Power of Petroleum.
VIII

History of Petroleum or Rock Oll.

Boring of Oil Wells.

Origin of Petroleum.
General View of the Geological Distribution of Petroleum in the
United States and Canada.

General View of the decognizar Distribution of Authorities and Canada.

XI.

Preparation of Aniline Directly from Coal Tar, and its Probable Origin—Artificial Preparation of Aniline from Benzole; Transformation of the latter into Aniline—Properties of Aniline—Chemical Transformation of Aniline—Chemical from Aniline—Chemical Transformation of Preparation and Application in Dyeling.

Artificial Preparation of Aniline
Preparation of Aniline C lors

Air PENDIX.

Amount of Petroleum Exported from New York in 1863 and 1864, and the Countries and Pinces to which it was Sent.

Average Prices of Petroleum in 1864 at New York and Philadel-bila.

phia,

My new Catalogue of Practical and Seientific Books sent by mail

ree of postage to any one who will savor me with his address,

HENRY CAREY BAI D,

7 3 No. 406 Walnut street, Philadelphia

TO SOAP MANUFACTURERS—FLANS OF FACTORIES and apparatus—Processes to prepare lyes and the following soaps:—Castile. White, Family, Soft, Transparent, Silicated, Pancy, Etc. Analyses of Lyes, Atkalies, Greases, Soaps, Address Prof. H. DUSSAUE, Chemist, New Lebanon, N. Y.

TO SOLDIERS AND OTHERS,—CONGLE'S ART OF Dyeing and Color-making on Woolen, Silk and Cotton. One hundred recipes, full directions, sent by mail on receipt of price, 50 cents. Address 7 4° Wolcott, Wayne Co., N. Y.

PLATINA—WHOLESALE AND RETAIL—FOR ALL purposes. H. M. RAYNOR, Importer, No. 748 Broadway, New York. Platinum Scrap and Ore purchased.

DYNAMOMETERS OF ANY REQUIRED POWER, indicating from 5 pounds to 500 pounds, or from 25 pounds to 1.600, may be found at FAIRBANK'S & CO. S SCALE WARE-HOUSE, No. 222 Broadway, N. Y.

BALL & CO., MANUFACTURERS OF ALL KINDS

of Wood-working Machinery—Planers, Sash Molding and Ten
oning Machines, Power and Foot-morthing Machines, Scroll Saws,
Saw Arbors, Pulleys, &E. All Irom the latest improved patterns.
For particulars see our illustrated catalogue. R. BALL & CO.,
Worccester, Mass.

WE HAVE SPENT MUCH TIME AND MONEY TO produce the best Engine Lathes in the world. We invite purchasers to call on us before buying. We always have planer centers in hand.

6.4* Cypross street, Worcester, Mass.

A VALUABLE PATENT FOR SALE.—ADDRESS S. M. GOFF, Rast Addison, Addison Co., Vt. 6 9°

WINANS' ANTI-INCRUSTATION POWDER.—TEN years a standard and reliable article for preventing scale.

Beware of frauds and imitations. H. N. WINANS, N. Y. 6 4*

Neware of trauds and imitations. H. N. WINANS, N. Y. 6 48 C. NOW'S PATENT SAFETY GOVERNOR AND VALVE DOMBINED. Patented Oct. 11, 1859. Relissued May 13, 1862. Manufactured only by the undersigned. The Executors of the Estate of Joseph Hall, deceased, would announce that they will continue the manufacture of Snow's Patent safety Governor and Valve Combined, and will be prepared with increased facilities to fill orders promptly. This is the only Governor and Talvet of the State of Snow's Patent safety Governor and Valve deep promptly. This is the only Governor in the case of accident, such as breaking the crank or shart or parting of the belt. We also manufacture Governor's for Portable Engines, which, in point of efficiency cannot be excelled. Circulars and Price Lists furnished on application. Address all orders as below. F. W. GLEN, M. E. HOLFON, Executors of Estate of Joseph Hall, deceased.

7 10s

RELIEF FOR THE DEAF.—HASLAM'S SOUND-magnifying Tubes, for hearing in church or other public as semblies. Send for a descriptive pamphlet to E. HASLAM, No. 32 John street, New York.

EMBREE & SPEAKMAN'S PATENT SWATHING MACHINE is a machine that every farmer needs that has grain to cut. State and County Rights will be sold very reasonable. For particulars address Box No. 201, Westchester, Chester Co., Pa. 5 8*

MANUFACTURERS' AND MECHANICS' SUPPLY
Depot, N. E. corner of Third and Willow streets, Philadelphia,
Pa. A large assortment of first quality Steel for sale at reduced
rates, consisting of all sizes Cast, Shear, File, Auger, Fork, Blistered,
Machinery, Tire, Axle, Pen, Sheet and other Steel.

LIBERT POTTS.

BOILER INCRUSTATIONS.—A MOST VALUABLE discovery and perfect remedy for the removal of scale in fresh and salt-water boilers. Has been thoroughly tried, with perfect success. High testimonials and circular furnished on application to 5 12*
TEMPLE & FITCH. Bridgeport, Conn.

THE TENTH

MECHANICS' EXHIBITION
will commence at

FANEUIL AND QUINCY HALLS,
IN THE CITY OF BOSTON,
ON WEDDAY, SEPTEMBER 25.

Contributions from all parts of the country of whatever is new,
useful and beautiful in Mechanism and Art are solicited.

A GREAT CHANCE FOR PROFITABLE INVESTMENT-The State and County Rights of Gilbert's new Patent
Coal and Ash Sifter, at great bargains. The cleanest, handsomest
and most convenient coal and ash sifter in use. No dust.

8 BLAKE, No. 5 Tryon Row.

THE CELEBRATED KENTUCKY CIDER MILL—
Patented Nov. 24, 1863. State, County or Shop Rights for Sale
For particulars address the patentee,
THEO. SHARF,
Louisville, Ky.

THE EIGHTEENTH ANNUAL EXHIBITION OF THE Maryland Institute of Baltimore, for the Mechanic Arta, will commence on Monday Evening, the 2d of October, and continue to Monday Evening, the 30th of "ctober. 1866.

The hall will be open for the reception of goods on Monday, the 28th of September.

Goods for Competition and Premium must be deposited before Thursday Night, the 28th of September.

Circulars, embracing details, may be had of the Actuary at the Institute.

stitute.

Communications addressed to the undersigned, or Joseph Gibson, Actuary, will be promotly attended to. W. W. MAUGHLIN, 3 3m Ch.irman Committee on Exhibition.

FOR DANIELLS'S PLANING MACHINES, CAR MOR-TISING, Boring Machines, Car-Tenoning Machines, Car Planing and Beading Machines, Etc., address J. A. PAY & CO., Cincinnati

FOR WOODWORTH PATENT PLANING AND MATCHING MACHINES, Patent Siding and Resawing Machines, address J. A. FAY & CO., Cincinnati, Ohio.

R WOODWO...

A. FAY & CO.,
CINCINNATI, OHIO
Patentees and Manufacturers of all kinds of
PATENT WOOD-WORKING MACHINERY
of the latest and most approved description,
particularly designed for
Sash, Blind and Door,
Wheel, Felly and Spoke,
Stave and Barrel,
Shingle and Lath,
Planing and Res
Circulars.

A CC.

Ship tarus,
Raiiroad,
Car and
Agricultural Shops,
Mills, Etc.

Warranted superior to any in use. Send for Circulars.
For further particulars address

Corner John and Front street
Circinnati, Officianati, Officiana

Who are the only manufacturers of J. A. Fay & Co.'s Fatent Wood working Machinery in the United States.

STEAM GENERATORS AND ENGINES, - THE AMERICAN Safety Steam Engine Company IOAN Safety Steam Engine Company are manufacturing Eray ton's Patent Staam Generators and Engines. There is a saving of 25 per cent in fuel over ordinary engines and boilers and they cost but little to keep them in rep ir There is no possibility of exploding the generator. For particulars and circular address GEO, WOOD. MAN, Treasurer and Agent, 84 Washington st. Boston 2 12*

C. STILES'S PATENT POWER FOOT AND DROP

• PRESSES.—Dies of every description made to order. Se ad
execular.

N. C. STILES & CO.,
West Meriden, Conn.

TEAM ENGINES-WITH LINK MOTION, VARIA-BLE automatic cut-off, of the most appro-earing, Shatting, Hanger, Etc. Address 1 25° M. & T. SAULT, New Haven, Conn.

MALL BEAM ENGINE,—I WILL SELL A BEAU-tifful 2-horse beam engine, suitable for a small boat or lagb business, for \$170 cash. Said engine is entirely new, and was made at odd times by a man "for the fun of the thing." The engine is complete, with feed pump, etc. No answers unaccompanied by stamp for return post noticed. EGBERT F. WATSON, Box 775, N. Y.

HOWE SEWING MACHINE COMPANY .- ELIAS

FOR SALE—THE ENTIRE "RIGHT OR STATE Rights of our Patent Adjustable Wrench. It has the advantages of the Swench. Is a very neat thing. Address PENNEY & THURSTAN Mechanic Falls, Me.

I NVENTORS' EMPORIUM, NO. 37 PARK ROW, N. Y.

New and useful inventions manufactured, introduced and sold on commission. Agents wanted. [3647] RICE & CO.

WATER POWER—AT N. FAILS, N. Y., FOR 50 Mills.—Now ready, for sale, a lease, at halt price of Patterson Power Leases. Renewable every 29 years for ever. Apply at No. 23 Courtlandt street, New York to HORACE H. DAY.

HARTMANN & LAIST, CINCINNATI, OHIO; MANU-facturers of Glycerin Acetic Acid, Grape Sugar and Strup. 1 20*

PORTABLE STEAM ENGINES.—THESE WORKS have lately increased their facilities for the manufacture of their so popular engines. Prices reduced to a peace standard. Four-teen feet and more of heating and the proposed to the nominal horse-power. Delivery to the Regions by part navigation much prompter and cheaper than from more essent no proposed for circular before baying.

Ames Iron Works, Oswego, N. Y.

N EW BOILER WORKS—LEHIGH BOILER WORKS, allentown, Pa.—For the Manufacture of Boiler and Shectiron work of all descriptions, such as Locomotive, Flue. Tubular and Chinder Boilers, Locomotive Tanks, Water Tanks, extended to with dispatch. Also repairing the second of the with dispatch and will made. Part of the firm being Machinists, we are prepared to do out-door machine work, such as setting up engines and boilers, with steam and water pipes, and repairing generally, noble, RHODA & CO.

MILL STONE DRESSING DIAMONDS SET IN
Patent Protector and Guide,—Sold by JOHN DICKINSON,
Patentee and Sole Manufactures and Importer of Diamonds for all
Mechanical purposes.
No. 64 Nassau Herwitz of W. York City. Old Diamonds reset.
N. 8.—
Send postage stamp for Descriptive Circular of the Dresser.
24 12°

M ACHINISTS' TOOLS, ENGINE LATHES, HAND Lathes, Planers, Upright Drills, Etc., of best material, and su-perior workmanship, manufactured and for sale by WM. M. HAWES 2 CO., Fall River, Mass.

GROVER & BAKER'S HIGHEST PREMIUM ELAS TIC Stitch Sewing Machines, 496 Broadway, New York. 1 tf

UNKENHEIMER'S IMPROVED GLOBE VALVE;
A complete assortment of Brass Work for Locomotives, Portable and Eathlorary Engines.
Portamples and catalogue address.
II XII 26*
No. 13 East Seventh street, Cincinnati.

TRUE'S POTATO PLANTER DOES THE WORK OF 12 men. Rights for sale. J. L. TRUE, Garland. Maine 25 10*

To MANUFACTURERS AND EXPORTERS.—ALL articles of American manufacture which are exported to foreign countries are entitled to a drawback equivalent to the amount Law. We offer our services to secure the refunding of this amount, and will cheerfully furnish all necessary information. MERCHANT, OAKLEY & CO. Custom-house and Internal Revenue Brokers, No. 71 Broadway, Room No. 58.

TO GAS COMPANIES.—FOR SALE AT THE ISLAND Works of the Gas Co., Washington, D. C. 1 Retort House, roof frame of Iron, 141 feet long, 63 feet wide, with the slate attached. All the Iron Work belonging to 25 benches, of 3 retorts each. 4 Washers, 18 Inches diameter.
4 Further, 19 Inches diameter.
4 Further, 19 Inches diameter.
1 Stoot Station Meter, together with sundry connections, the wholforming a complete Gas Station, in good order.
For examination apply to GEO. A. McLLHENNY, Engineer of Gas Works, Washington, D. C.
For purchasing apply to B. H. BARTOL, Philadelphia.

23XIItf

ANCOCK'S PATENT STEAM BLOWER.—THIS lastrument, after two year's use has proved a perfect success. It is the use of the provided price increased by the state of the provided p

THOMAS ANTISELL, M. D., ANALYTICAL AND Consulting Chemist (Late Chemical Examiner in U. 8. Patent office, Washington, D. C.) Chemical investigations made and advice given on unperfected inventions. Analysis made; Ores and Mineral Lands Examined. Address Georgetown, D. C. 4 12°

POLTS, NUTS, WASHERS, SET SCREWS, COACH Screws and Machine Screws, constantly on hand for sale by LEACH BROTHERS, No. 86 Liberty street, New York. 21 12*

2.000 LOLTS PER DAY CAN BE MADE ON PATENT MACHINES. Also Rivets and Spikes

Jos. Rawland & Co., Kensington Iron Works, Phila.
Tiers & Bradshaw, Mount Piessant Foundery, 901 Beach st., Phila.
Lec. W. Landel & Co., 286, 86, 62 Beach st., Phila.
Houseau, Harrison & Vallet, Leclede Solling Mill, St. Louis, 1 tf

WHEELER & WILSON, 625 BROADWAY, N. JY. —
Lock-stitch Sewing Machine and Button-hole Machine. Sti

SECOND-HAND MACHINERY FOR SALE, IN GOOD order.—One Drop 450 lbs. Hammer, one Drop 250 lbs. Hammer, one Trip Hammer, three Presses, two Edging Machines, two Milling Machines, one Brown & Sharp Serew Mochine, one Four-spindle Drill, one Three spindle Drill, one small Screw Machine.

POB SALE,—THE PATENT RIGHT OF GARDNER'S Compensation Governor and Automatic Stop, for the New England States and California and Oregon. Address 6.5%

PATENT EXCHANGE—TO BUY OR SELL PATENTS call or address PATENT EXCHANGE, No. 229 Broadway.

POWER FOR RENT.—WE WILL RENT SHOP Rooms, with from 1 to 100-horse power, as wanted. Terms very reasonable. Rooms light, stry, comfortable, and suited for every work. Heated by steam. Located in Balt more. Address MERRILL F. TENT FIRE-ARM CO., Baltmore.

J OHN T. BURR, CONSULTING AND SUPERIN-TENDING Engineer, No. 222 Front street New York. Draw-ings prepared for all kinds of steam and other machinery. Steam Engines and Machinist's Tools, new and second hand, for sale. Spe-cial atteauno devoted to Inventor's Drawings.

FOR SALE—THE RIGHT FOR MY STONE GATH-FIFIC AMERICAN July 15, 1869. Address J. L. QUIMBY, Ploasant Grove, Pa.

COR FIRST-CLASS, EASTERN MADE, WOOD-working Machinery address J. A. FAY & CO., or E. C. TAINT-77°.

D. LAKE'S FLY-TRAP—ILLUSTRATED IN THE the receipt of \$4.½ DAVID LAKE, Smith's Landing, N. J. 24 104

TRIP HAMMERS.

RIP HAMMERS.

Farties using or intending to erect Trip Hammers are invited call and examine the Hotchkiss Patent Atmospheric Hammer, ade by CHARLES MERRIJIL & SONS. No. 556 Grand street, New ork. They are run by a belt; occupy 2½ by 4 feet apace; strike 200, 400 blows per minute, according to size, and, the hammer runing in sildes, each blow is square and in the same place. Die work in be done under them more rapidly than under a drop, and for waging it is unequaled. They are very simple in their construction, under perfect control, and require much less power than any here hammer. Send for a circular illustrating the hammer, which were full particulars.

THEYSON & OGG, NO. 39 GREENE STREET, NE - R Grand, Machinists, Brass Finishers and Model Makers, Ex-perimental Machinery. Indicators, Registers and Steam Gages of every kind accurately and promptly made.

GRINDSTONES OF THE BEST QUALITY MANUfactured for Mechanics, Railroad Shops, Manufacturers and the Address orders to Berca, Cuyahoga Co., Ohio.

WRIGHT'S PATENT FLOOR CLAMP, ACKNOWL-EDGED by all to be the best in use. For circulars address HIRAM C. WRIGHT, Worcester, Mass.

TO MANUFACTURERS AND MERCHANTS!

STUTTGART, CARLSRUHE AND NUREMBERG.

INVITATION.

The Industrial Museum of the Royal Wurtemberg Board of Trade and Commerce at Stuttgart; the Industrial Museum of the Grand Duchy of Buden, at Carlsruhe, and the Industrial Museum of the Town of Nuremberg have a second of the Commerce of t

wn.

On the objects thus to be exhibited labels will be affixed, state case that patents have been obtained on any of them. In wountries that have been granted, and statements to the same eith be made in the weekly papers, published by the Boards of ad institutions.

to communicate to them copies of the printed Museum, at Stutt.

The Board of the Royal Wurtemberg Industrial Museum, at Stutt.

The Board of the Industrial Museum of the Grand Duchy of Bailen, at Carlsvuhe.

The Board of the Nuremberg Industrial Museum, at Nuremberg, DR. IEEE,

The Board of the Nuremberg Industrial Museum, at Nuremberg, DR. IEEE,

2 2m3t

WOOD-WORKING MACHINERY.—THE SUBSCRIBER Is Agent in New York for J. A. Fay & Co., C. B. Rogers & Co., Ball & Williams, Richardson, Meriam & Co., H. S. Smith, Gray & Woods, Lane & Bodley, D. Doncaster, and all other manufacturers of Wood-working Machines. S. C. HILLS, No. 12 Platt st. d

FOR BEDSTEAD AND FURNITURE MACHINERY, Frieszing, Shaping and Molding Machines, address J. A. FAY at Co., Cincinnate, Ohio.

M ACHINISTS' TOOLS.

Engine Lathes, Vertical Drills, Hand Lathes, Vertical Drills, Hendisontal Drills, Boring and Rearning Lathes, Slide Rests, Chucks, Shaping Machines, Constitution of the Constitution of

Boiler incrustations. OILER INCRUSTATIONS.

A. G. Cross, Erq.—Dear Str.—We have used your Anti-incrustation Powder in our locomotives during the past year, and find it to be all that is claimed for it, both in the removal of the old incrustation, and as a complete and perfect preventive of the formation of any scale whatever, and i believe without injury to the irou. I have no hesitancy in recommending it to all who are using steam boilers, as the most perfect of all the compounds which I have yet seen for this purpose.

B. BRISCOE, M. M., D. & M. R. R. S. Sy*

A. G. OROSS, Detro.t.

INGERSOLL'S IMPROVED HAY AND COTTON PRESSES.—We make three classes of presses.

First—HAND POWERS.

A cheap and exceedingly economical press for farm and plantation use; are very compact, easily handled, and readily put together for use, and possess superior advantages for shipping.

Second—HORSE FOWERS.

These have met with much favor, and are highly commended wherever used.

Third—SCREW PRISSES.

These of large sale in foreign markets. It is a complete and superior machine for packing Cotton, Wool, Hides, Hair, Hemp, Etc.

Also a very popular, light and cheap machine for Sawing Down Trees. Weight of machine less than 25 pounds, and price \$25. State Rights of this machine for sale and rich bargains offered.

Please write for catalogue and further information to "INGERISOL & DOUGHERTY."

I 12*eow Green Point, Kings Co., N. Y.

NOTICE TO CHURCHES AND SCHOOLS—BELLS within the reach of all. The Amalgam Bell, well known throughout the United States as "the cheapest and boets." Frice reduced to 20 cents per pound and warranted. Send for descriptive circular to the manufacturer. Mo. 6. 60 pc street, New York.

MESSIEURS LES INVENTEURS.—aVIS IMPORT-qui préféreraient nous communique leurs inventous en Français, peuvent nous addresser dans leur langue natale. Envoyes nous un dessin et une description concise pour nôtre examen. Toutes com munications seront regues en confidence.

THE BISHOP GUTTA-PERCHA COMPANY, EXCLU-SIVE Manufacturers in United States of every description of Pure Gutta-percha Goods, such as

Insumed 1770, or against Arguer and Arguer a

Tissue S'icet, of superior quality. or hatters, artificial flower ma kers, etc., Tubing for Pure Water, Beer, Soda, ctc., Boses for Flax Machinery of all sizes—a very superior article; with a great variety of other articles made to order. Apply at office and alea room, No. 201 Broadway. SAML. C. BISHOP, General Agent. 7tf

OLL! OIL! OIL

For Railroads, Steamers, and for machinery and Burning
PEASE'S Improved Engine Signat, and Car Oils, indorsed and re
commended by the highest authority in the United States and En
rope. This Oil po seeses qualities vitally essential for lubricating and
burning, and found in no other oil. It is offered to the public upon
the most reliable, thorough, and practical test. Our most skillful
engmers and machinists pronounce it superior to and cheaper than
any other, and the only oil that is in all cases reliable and will not
gum. The "Scientific American," after several tests, pronounces it
"superior to any other they have used for machinery." For sale
only by the Inventor and Manufacturer, F. S. Plase, No. 61 and
63 Main street, Buffalo, N. Y.

N. B.—Reliable orders filled for any part of the world.

RON PLANERS, ENGINE LATHES, DRILLS AND other machinists' tools, of superior quality, on hand and finish ing, for sale low. For description and price address NW HAYEN MANUFACTURING COMPANY, New Haven, Conn.

DAMPER REGULATORS—GUARANTEED TO EFFECT a great saving in fuel, and give the most perfect regularity of power. For sale by the subscribers, who have established their exclusive right to manufacture camper regulators, using disparagms or flexible vessels of any kind CLARK'S PATENT STEAM AND FIRE REGULATOR COMPANY, No. 117 Broadway, New York

CHEAP SOAP,—SAPONIFIER OR CONCENTRATED LYE—The Ready Family Soap-maker Soap for three cents per pound. See SCHENTIFIC AMERICAN March 18, 1885. Custion-Original, Genuine and Patented article is put up in one-pound from canali others beling counterfeit. Manufactured by FENNSY LYANIA SALT MANUFACTURING CO., Office Fitt street and Duquesne way, Pittsburgh, Pa.

\$125 A MONTH!—AGENTS WANTED EVERY—\$20 Sewing Machine, the only low-price machine in the country which is licensed by Grover & Baker, Wheeler & Wilson, Howe, Sunger & Co and Bachelder. All other machines now sold for less than forty dol lars each are infringements, and the seller and user are hable to fine and imprisonment. Salary and expenses, or large commission, allowed. Illustrated circulars sent free. Address StiAW & CLARK, Biddeford, Maine.

A MONTH !- I WANT AGENTS EVERY-W. IERE, at \$70 a Month, expenses paid, to sell Fifteen Articles the best selling ever offered. Full particulars free. Aodress OTIS T. GAREY, Biddeford, Manne.

STABLISHED 1826,—WORLD'S FAIR AND AMER-ICAN Institute Prize Medal Turning Lather for Poot and Steam Power, manufactured by JAMES STEWARTS SON, No. 252 Canal street, New York, Amateur's Turning Lather made to order 23 16*

TOR WOODWORTH PATENT PLANING AND MATCHING MACHINES, Patent Siding and Resawing Machines address J. A. FAY & CO., Cincinnati, Ohio.

PORTABLE STEAM ENGINES—COMBINING THE maximum of efficiency, durability, and economy with the min mum of weight and price. They are widely and favorably known more than 30b being in use. All warranted satisfactory or no sale Descriptive circulars sent on application. Address J. C. HOAL-6.

NEEDLES.—SAND'S NEEDLE CO., MANUFACTURERS of Machine spring Needles. These ne dies are made by patented machinery, and consequently we claim a uniformity of spring which cannot be obtained in the ordinary way of making Address, with two samples inclosed, SAND'S NEEDLE COMPANY.

SETS, VOLUMES AND NUMBERS.
Entire sets, volumes and numbers of Scientific American Cold and New Series) can be supplied by addressing A. B. C., Box No. 778, care of MUNN & CO., New York.

\$2,000 A YEAR MADE BY ANY ONE WITH Peresidents, Cashiers and Treasurers of three Sants indorse the circular, Sent free with samples. Address The American Stencil Tool Works, Springfield, Vi.

CAN I OBTAIN A PATENT?—FOR ADVICE AND instructions address MUNN & CO., No. 37 Park Row, New York, for Twenty Years Autorneys for American and Foreign Patents Caveats and Patents quickly prepared. The SCIENTIFIC AMERICAN 38 a year. 30,000 Patent Casea have been prepared by M. & Co.

REYNOLDS' TURBINE WATER WHEELS.—COM PETENT men are employed to measure streams, make plans and put in flumes, wheels, and gearing. VALLCOT & UNDERFILL NO. 170 Broadway, New York.

HOLSKE & KNEELAND, MODEL MAKERS, PAT
LENT Office Models, Working Models and Experimental Ma
charger, made to order at \$28 Water street, near Jefferson street
New York, Refer to Mun & Co., "CIENTIFIC AMERICAS On Ce. HI

ENGINEERING SCHOOL. FRANKLIN, DEL. CO., ing, Wechanics, Physics, Chemistry, and all applications, with full sets Eng. Instruments, Chem Apparatus, Etc. Sixo pays Board and Tu tion one year. G. W. JONES, A. M., Prin.

CREWS.—COMSTOCK, LYON & CO., OFFICE NO. A 74 Beekman street, N. Y., manufacture Turned Machine Serews in superior article to a headed serews, of all sizes under 1, inche in diameter, 3 inches long. Also Steel, Iron and Brass Screws for Guns, Pistois, Instruments, Trusses, Artificial Limbs, Etc., of the fines quality, to order.

Bur Beachtung fur beutiche Erfinder. Die Unt igeichnern baben eine Anleitung, bie Erfindern bas Berbalten angebt, nur fich ibre Patente ju fichern, berausgegeben, und berabfelgen folde gratie an biefelben.
Graber, welche nicht mit ber englischen Strache befannt find, tonnen ibre Mitthellungen in ber beutichen Strache machen. Stigen von Erfindungen mit turzen, beutich geschrieben Weichenen Beforen beliebe man zu abbreffren an

Munu & Co.,
37 Part Now, New-Sort.
Dafeldt ift gu baben: Die Patent-Defete der Vereinigten Staaten,


nebft ben Regeln und ber Gelchäftsorbnung ber Patent. Diffice un Antelungen für ben Erfinber, um fic batente gu foern, in ben Breaten form durchen. Gerner Aussige aus ben Parent Gefesen frember Länder und barauf bezighte Ratbichläge; ebenfall nichtliche Wille Wille für Grinber und hofen, welche vaten fren wollen. Preis 20 Cta., per Poel 25 Cta.

The object of this valve is to overcome the resistance and loss of power in the use of common valves, more particularly the slide valve. It is plain that by overcoming this resistance, there will be just so much power added to the engine for practical purposes. The chief difficulty has been to balance the valve properly, without making it too complicated or expensive. It is claimed that this has never been so successfully accomplished as in the valve herewith illustrated.

This valve may be perfectly balanced; is about as simple in its construction as an ordinary steam cock, and is claimed to be much cheaper to construct than any other valve known. In addition to these se veral advantages, it will out-wear any other, since the finger.

ance made for expansion of the valve, to prevent it sticking, as it would be liable to do with a set-screw.

Fig. 3 shows the upper, or exhaust side of the valve, and the recess, I, for the purpose of counterbalancing the upward pressure of the valve. There are small openings admitting the steam from the inside of the valve to these recesses. If the sum of the area of both these recesses exactly corresponds to the area of the main opening in the underside of the valve, it is evident that the valve will be balanced. It is found on actual experiment that the valve works as easy under pressure, the surfaces being exactly right, as it does without any pressure. The valve on a six-horse power engine, at work under sixty-five pounds of steam, was worked with the thumb and

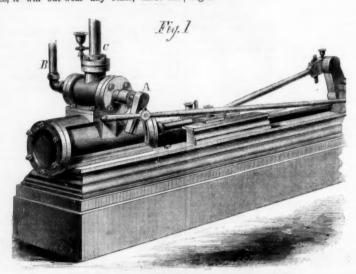

CARHART'S OSCILLATING STEAM VALVE.

working parts are not subject to heavy pressure. It may be applied to engines of any ordinary device, without alteration in the valve motion, link, or any part of the engine proper.


Fig. 1 represents an engine with the valve attached. This engine formerly had on a slide valve. No alteration has been made in the cylinder or valve seat. There are flanges cast on the under side of the valve socket, whereby it is bolted to the old valve seat. The arm, A, attached to the valve stem takes the eccentric rod by which the valve is worked. The position of the pin in which the rod hooks may be varied by means of a slot in the arm, thus varying the oscillation of the valve. B is the steam, and C is the exhaust pipe.



Fig. 2 represents the valve isolated, chiefly to show the opening, D, which communicates alternately with corresponding openings in the valvechest, leading to the opposite ends of the cylinder. Steam is admitted at E; the valve being cast hollow communicates alternately with the opposite ends of the cylinder through D, and exhausts over the valve,

The valve is made tapering, so as to wear to a fit. It is held in place by steam pressure, and is without a set-screw; there is not a screw or bolt exposed to the action of the steam. The steam passes through the small opening at G, into a thin chamber at the head of the valve, made by a washer being slipped on to the stem. The area of this end being greater than that of the opposite end, the pressure is just enough greater to hold the valve in its place. The washer not fitting steam-tight, there is allow-

Fig. 4 shows the under side of the valve chest, the flanges with bolt holes, and more particularly the openings, H H, which communicate with openings leading to opposite ends of the cylinder.



Patented through the Scientific American Patent Agency July 25, 1865.

Rights for sale—the whole right, or any particu lar territory.

For further information, address the inventor, Rev. J. Carhart, D.D., Troy, N. Y., or Geo. Gould, President Oscillating Steam Valve Company, at the same place.

A Convenient Utensil.

A neat arrangement for sprinkling salt on food has been shown us. It is merely an ordinary cruet with a perforated top, but inside there is a wooden post set fast, having a number of small arms radiating from it. This arrangement divides the mass of the salt so that it falls freely through the holes in the top. The cruet looks very curious with this attachment in it, and is a novelty. We are assured by the patentee that the article is a success, and that he is selling quantities of them. Mr. C. P. Crossman, of West Warren, Mass., is the inventor.

Models.—We are almost daily receiving models which have neither name nor post-office address upon them. One such model has been in our office upwards of six months, and we have no trace of its We hope all who send models to us will be origin. particular to put their names and post-office addresses upon them.

TO

INVENTORS, MECHANICS, AGRICULTURALISTS,

THE ANNUAL

PROSPECTUS.

Scientific

THE CHEAPEST AND BEST

MECHANICAL JOURNAL IN THE WORLD.

A NEW VOLUME OF WHICH COMMENCED

JULY 1, 1865.

This valuable journal has been published nineteen years, and during all that time it has been the firm and steady advocate of the interests of the Inventor, Mechanic, Manufacturer and Farmer and the faithful chronicler of the

PROGRESS OF ART, SCIENCE AND INDUSTRY

PROGRESS OF ART, SCIENCE AND INDUSTRY
The SCIENTIFIC AMERICAN is the largest, the only reliable, and
most widely-circulated journal of the kind now published in the
United States. It has witnessed the beginning and growth of nearly
all the great inventions and discoveries of the day, most of which
have been illustrated and described in its columns. It also contains a Weekly Official List of AL the Parent Claims, a feature of great value to all Inventors and Patentees. In the

MECHANICAL DEPARTMENT
a full account of all improvements in machinery will be given,
Also, practical articles upon the various Tools used in Workshops and Manufactories.

HOUSEHOLD AND FARM IMPLEMENTS:

this latter department being very full and of great value to Farmers and Gardeners; articles embracing every department of Popular Science, which everybody can understand.

WOOLEN, COTTON AND OTHER MANUFACTURING INTERESTS will have special attention. Also, Fire-arms, War Implements Ordanace, War Vessels, Railway Machinery, Mechanica' Tools, Elec tric, Chemical and Mathematical Apparatus, Wood and Lumber ma-chines, Hydraulics, Pumps, Water Wheels, etc.

STRAM AND MECHANICAL ENGINEERING

will continue to receive careful attention, and all experiments and practical results will be fully recorded.

PATENT LAW DECISIONS AND DISCUSSIONS

will, as heretofore, form a prominent feature Owing to the very large experience of the publishers, Messrs. Munn & Co., as Solicirons of Patents, this department of the paper will possess great in. terest to PATENTEES AND INVENTORS.

The Publishers feel warranted in saying that no other journal now published contains an equal amount of useful information while it is their aim to present all subjects in the most popular and attract

The SCIENTIFIC AMERICAN is published once a week, in convenient form for binding, and each number contains sixteen pages reading matter, il ustrated with

reading matter, il 'ustrated with UMEROUS SPLENDID ENGRAVINGS of all the latest and best inventions of the day. This feature of the iournal is worthy of special notice. Every number contains from five to ten original engravings of mechanical inventions, relating to every department of the arts. These engravings are executed or artists specially employed on the paper, and are universally acknowledged to be superior to anything of the kind produced in this

TERMS OF SUBSCRIPTION.

 Per annum
 \$3 00

 Six months
 1 50

 Four months
 1 00

MUNN & CO., Publishers, No. 37 Park Row, New York City

PATENT AGENCY OFFICE.

MESSRS, MUNN & CO. have been engaged in soliciting American and Foreign Patents for the past eighteen years. Inventors who wish to consult with them about the novelty of their inventions are invited to send forward a sketch and description. If they wish to t their applications into Munn & Co.'s hands for prosecution they also observe the following rules:—

Make a substatial model, not over one foot in size. When finished,

put your name upon it, then pack it carefully in a box, upon which mark our address; prepay charges, and forward it by express. Send full description of your invention, either in box with model, or by mail; and at the same time forward \$16, first patent fee and stamp taxes. As soon as practicable after the model and funds reach us, we proceed to prepare the drawings, petition, oath and specification, and forward the latter for signature and oath.

and forward the latter for signature and oath.

Read the following testimonial from the Hon. Joseph Holt, formerly Commissioner of Patents, afterwards Secretary of War, and now Judge Advocate General of the Army of the United States:—
MESSIES, MONS & CO.:—It affords me much pleasure to bear testimony to the able and efficient manner in which you discharged you cause as Solicitors of Patents, while I had the honor of hoding the office of Commissioner. Your business was very large, and you sustained (and I doubt not justly deserved) the reputation of energy marked ability, and uncompromising fidelity in performing your oro-fessional engagements.

nenis. Very respectfully, your obedient servant, J. Hol

For further particulars see advertisement inside, or send for Pamphlet of Instruction. Address
No. 37 Para Row, New York City.

FROM THE STEAM PERSON JOHN A. GRAY & GREEN